


1. 跷板开关型号ROCKER SWITCH MODEL SS11-BBDWG-R20-R;
2. 快插端子QUICK CONNECTOR TYPE;
单刀单掷 (SINGLE POLE DOUBLE THROW);
3. 额定值RATING:16A 125/250VAC (UL;C-UL);
12A 125/250VAC (UL;C-UL);
10A 125/250VAC (UL;C-UL);
6A 125/250VAC (UL;C-UL);
16(4)A 250V~T125/55(ENEC17;NEMKO;CQC;CB)
12A 125/250V~T125/55(CQC)
10A 125/250V~T125/55(ENEC17;NEMKO;CQC;CB)
6A 125/250V~T125/55(ENEC17;NEMKO;CQC;CB)






UL APPROVAL FILE NO.:E153399
ENEC CERTIFICATE NO.:NO3715
NEMKO CERTIFICATE NO.:P09211556/A1
CQC CERTIFICATE NO.10002049681
CB CERTIFICATE NO.:NO62986/A2

4. 柄的颜色ACTUATOR COLOR: 黑色BLACK
基座的颜色HOUSING COLOR: 黑色BLACK
5. 柄的印字形式ACTUATOR PRINTING: 白色 "●" WHITE COLOR
6. 所有部件均使用环保材料
ALL MATERIALS USE IN CONFORMIY WITH THE RoHS DIRECTIVE

TEL : 0769-82310511-867
PANEL CUTOUT DIMENSION



PANEL THICKNESS	X	Y
0.8~1.2mm	19.2 ^{+0.1} _{-0.1} mm	12.9 ^{+0.1} _{-0.1} mm
1.3~2.0mm	19.4 ^{+0.1} _{-0.1} mm	12.9 ^{+0.1} _{-0.1} mm
2.1~2.5mm	19.8 ^{+0.1} _{-0.1} mm	12.9 ^{+0.1} _{-0.1} mm

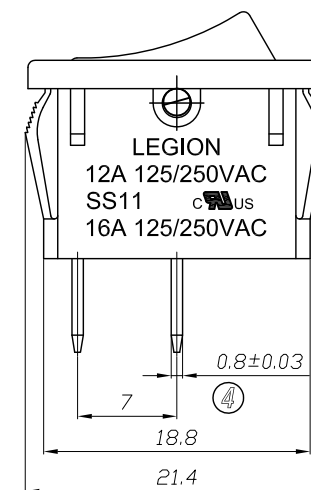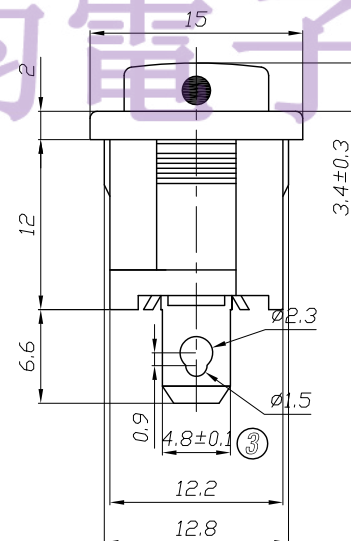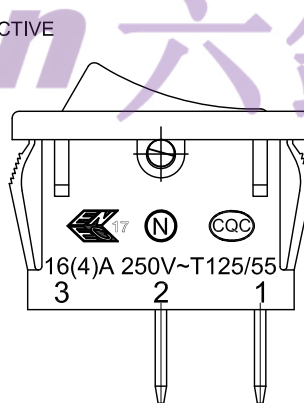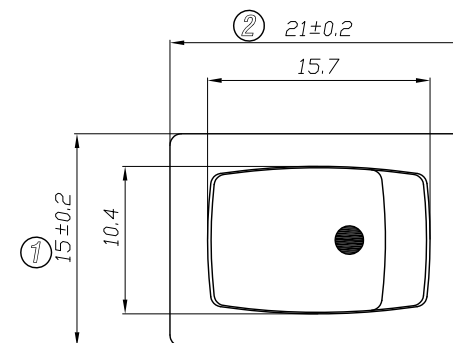

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		
4	→	9	→	RANGE	TOLERANCE					SCALE	NO		
3	→	8	→	X	±0.30					MAT'L	***		
2	→	7	→	X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.
1	→	6	→	X.XX	±0.10								
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°	LEGION ELECTRONIC & HARDWARE CO., LTD.				SS11-BBDWG-R20-R	WIF119157	A0	