


# AVR DA Product Family

## High Performance Functional Safety Ready Microcontrollers

### Summary

Microchip's AVR DA family brings easy capacitive touch and real-time control functionality to the low-power performance of the AVR® Microcontrollers (MCUs). The AVR DA MCUs pair the latest Core Independent Peripherals (CIP) with a robust Intelligent Analog portfolio to create a device that not only excels as a standalone processor but also as a companion MCU in designs that demand precision. Furthermore, the high memory density of the AVR DA family makes these MCUs well suited for communication stack intensive functions, both wired and wireless.

Available in 28- to 64-pin packages, with up to 128 KB Flash and operating at up to 24 MHz across the full supply voltage range of 1.8V to 5.5V the new AVR DA MCUs are ready to meet the needs of a diverse range of applications.

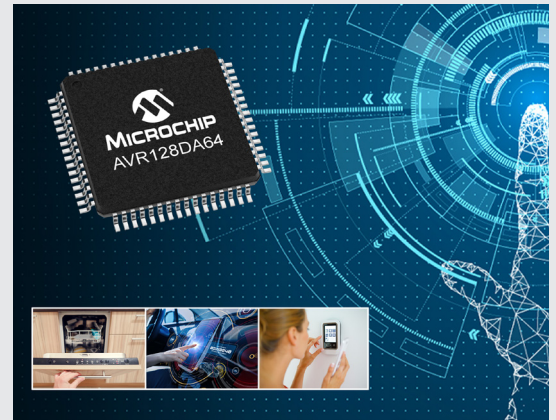

### Next Generation AVR® MCUs

The family uses the latest Core Independent Peripherals with low power features and 5V operation for increased noise immunity. The Event System, Configurable Custom Logic (CCL), along with intelligent analog peripherals, like 12-bit differential ADC, Zero-Cross Detect (ZCD), 10-bit DAC and the latest generation Peripheral Touch Controller (PTC) with Driven Shield+ and Boost Mode technologies make the AVR DA family ideal for low-latency control applications and capacitive touch user interfaces. The AVR DA family is designed to bring capacitive touch sensing and real-time control functions to applications including industrial control, home appliance products, automotive and Internet of Things (IoT).

### State of the Art Capacitive Touch

The PTC offers built-in hardware for capacitive touch measurement on sensors that function as buttons, sliders, wheels and 2D surfaces. The PTC is designed to perform capacitive touch acquisition on sensors independently from the CPU, resulting in low CPU utilization and reduced power consumption.

The AVR DA products support up to 46 self-capacitance and 529 mutual capacitance touch channels, which makes the AVR DA family the perfect choice for human interface applications where multiple capacitive touch keys, sliders, wheels or 2D surface are required.

- Driven Shield+ for increased noise immunity and water tolerance when using self-capacitance touch sensing.
- Boost Mode for faster response time in high node count interfaces using mutual-capacitance touch sensing.

### Functional Safety



The AVR DA family is recommended for safety critical applications targeting both industrial and automotive products (IEC 61508 and ISO 26262).

Necessary documentation such as FMEDA report and Safety Manual can be provided on request. Safety certified development tools are also available for this product. Please contact your local Microchip sales office or your distributor for more information.

## Intelligent Analog

The 12-bit differential Analog-to-Digital Converter (ADC) with conversion speeds of 130 ksp/s provides accurate and timely analog signal acquisition. Triggering and notifications can be transmitted to other peripherals without CPU intervention, enabling robust and deterministic response to system events.


The 10-bit DAC output can either be sent to a pin or it can be used to generate an adjustable reference voltage for the Analog Comparator (AC). The AVR DA feature up to three ACs, each having a dedicated DAC reference.

## Get Started Now

The AVR128DA48 Curiosity Nano Evaluation kit is the ideal platform for rapid prototyping with the AVR DA MCUs connecting seamlessly to the MPLAB X, Studio and IAR Embedded Workbench IDEs.

Our intuitive, web-based graphical configuration tools, MPLAB® Code Configurator (MCC) and START, will significantly reduce your development time.

The AVR DA family is supported by the GCC, MPLAB XC8 and IAR compilers. For the AVR DA family we also offer a XC8 Functional Safety Compiler License, certified by TÜV SÜD.

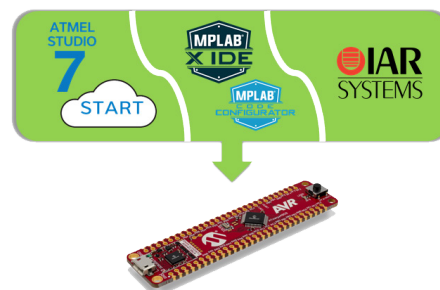

## Key Features

- Internal 24 MHz oscillator
- Up to 128 KB of FLASH memory
- PTC with up to 46 self-cap and 529 mutual cap channels
- 12-bit differential ADC with up to 22-channels
- 10-bit DAC
- Analog Comparator with selectable reference inputs
- Up to three Zero Cross Detectors (ZCD)
- Built-in safety functions: POR, BOR, VLM and Cyclic Redundancy Check (CRC) scan
- 16-bit Real-Time Clock and Periodic Interrupt Timer
- Configurable Custom Logic (CCL) peripheral
- Up to 10-channel Peripheral Event System
- Configurable, internally generated Reference Voltage
- USART/SPI/dual-mode TWI
- Available with up to 54 I/O
- Available in 28-, 32-, 48- and 64-pin packages
- 1.8V–5.5V operating voltage range
- –40°C to +125°C operating temperature range

Product	Max CPU speed (MHz)	Flash (KB)	EEPROM (B)	SRAM (KB)	Pins	I/O pins	10-bit differential ADC (channels)	10-bit DAC (output)	Analog Comparator	Peripheral Touch Controller (PTC)	PTC channels (self-/mutual cap)	Zero Cross Detectors	Event System channels	Window WDT	Configurable Custom Logic/ (LUTs)	USART/SPI/I2C	16-bit Timer/Counters	12-bit Timer/Counter	Temp grade options (°C)	Packages
AVR128DA28	24	128	512	16	28	22	1(10)	4(1)	3	1	18/81	1	8	1	1(4)	3/2/1	4	1	Industrial, 85 Extended, 125	SPDIP, SOIC, SSOP
AVR128DA32	24	128	512	16	32	26	1(14)	4(1)	3	1	22/121	1	8	1	1(4)	3/2/2	4	1	Industrial, 85 Extended, 125	TQFP, VQFN
AVR128DA48	24	128	512	16	48	40	1(18)	4(1)	3	1	32/256	2	10	1	1(6)	5/2/2	5	1	Industrial, 85 Extended, 125	TQFP, VQFN
AVR128DA64	24	128	512	16	64	54	1(22)	4(1)	3	1	46/529	3	10	1	1(6)	6/2/2	6	1	Industrial, 85 Extended, 125	TQFP, VQFN
AVR64DA28	24	64	512	8	28	22	1(10)	4(1)	3	1	18/81	1	8	1	1(4)	3/2/1	4	1	Industrial, 85 Extended, 125	SPDIP, SOIC, SSOP
AVR64DA32	24	64	512	8	32	26	1(14)	4(1)	3	1	22/121	1	8	1	1(4)	3/2/2	4	1	Industrial, 85 Extended, 125	TQFP, VQFN
AVR64DA48	24	64	512	8	48	40	1(18)	4(1)	3	1	32/256	2	10	1	1(6)	5/2/2	5	1	Industrial, 85 Extended, 125	TQFP, VQFN
AVR64DA64	24	64	512	8	64	54	1(22)	4(1)	3	1	46/529	3	10	1	1(6)	6/2/2	6	1	Industrial, 85 Extended, 125	TQFP, VQFN
AVR32DA28	24	32	512	4	28	22	1(10)	4(1)	3	1	18/81	1	8	1	1(4)	3/2/1	4	1	Industrial, 85 Extended, 125	SPDIP, SOIC, SSOP
AVR32DA32	24	32	512	4	32	26	1(14)	4(1)	3	1	22/121	1	8	1	1(4)	3/2/2	4	1	Industrial, 85 Extended, 125	TQFP, VQFN
AVR32DA48	24	32	512	4	48	40	1(18)	4(1)	3	1	32/256	2	10	1	1(6)	5/2/2	5	1	Industrial, 85 Extended, 125	TQFP, VQFN

The Microchip name and logo, the Microchip logo, AVR and MPLAB are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies.

© 2020, Microchip Technology Incorporated. All Rights Reserved. 5/20

DS30010210C