


25 Amp Schottky Rectifier

SBR2535 — SBR2545

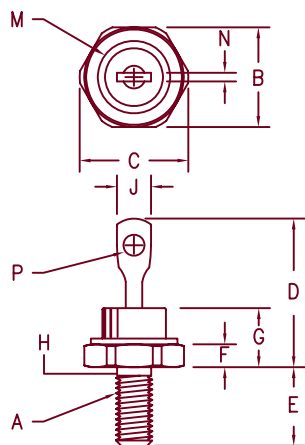

Notes:

1. 10-32 UNF3A threads
2. Full threads within 2 1/2 threads
3. Standard Polarity:
Stud is Cathode
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	---	---	---	---	1
B	.424	.437	10.77	11.10	
C	---	.505	---	12.82	
D	.600	.800	15.24	20.32	
E	.422	.453	10.72	11.50	
F	.075	.175	1.91	4.44	2
G	---	.405	---	10.29	
H	.163	.189	4.15	4.80	
J	---	.310	---	7.87	
M	---	.350	---	8.89	
N	.020	.065	.510	1.65	Dia.
P	.060	.100	1.53	2.54	

D0203AA (D04)

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SBR2535*	20FQ035	35V	35V
SBR2540*	20FQ040	40V	40V
SBR2545*	20FQ045	45V	45V

*Add the Suffix R for Reverse Polarity

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Forward Voltage
- V_{RRM} - 35 to 45V
- 25 Amperes
- Reverse Energy Tested

Electrical Characteristics

Average forward current	$I_F(AV)$ 25 Amps	$T_C = 105^\circ C$, Square wave, $R_{\theta JC} = 1.6^\circ C/W$
Average forward current	$I_F(AV)$ 30 Amps	$T_C = 97^\circ C$, Square wave, $R_{\theta JC} = 1.6^\circ C/W$
Maximum surge current	I_{FSM} 600 Amps	8.3 ms, half sine $T_J = 150^\circ C$
Max repetitive peak reverse current	$I_R(OV)$ 2 Amps	$f = 1$ KHz, $25^\circ C$, 1 μ sec Square wave
Max peak forward voltage	V_{FM} .53 Volts	$I_{FM} = 25A$: $T_J = 150^\circ C^*$
Max peak forward voltage	V_{FM} .58 Volts	$I_{FM} = 25A$: $T_J = 25^\circ C^*$
Max peak reverse current	I_{RM} 250 mA	V_{RRM} , $T_J = 125^\circ C^*$
Max peak reverse current	I_{RM} 2 mA	V_{RRM} , $T_J = 25^\circ C$
Typical junction capacitance	C_J 1200 pF	$V_R = 5.0V$, $T_J = 25^\circ C$

*Pulse test: Pulse width 300 μ sec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	$-55^\circ C$ to $175^\circ C$
Operating junction temp range	T_J	$-55^\circ C$ to $150^\circ C$
Max thermal resistance	$R_{\theta JC}$	$1.6^\circ C/W$ Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	$0.5^\circ C/W$ Case to sink
Mounting torque		12-15 inch pounds
Weight		0.2 ounces (6.0 grams) typical



6 Lake Street
Lawrence, MA 01841
PH: (978) 620-2600
FAX: (978) 689-0803
www.microsemi.com

05-25-07 Rev. 3

SBR2535 — SBR2545

Figure 1
Typical Forward Characteristics

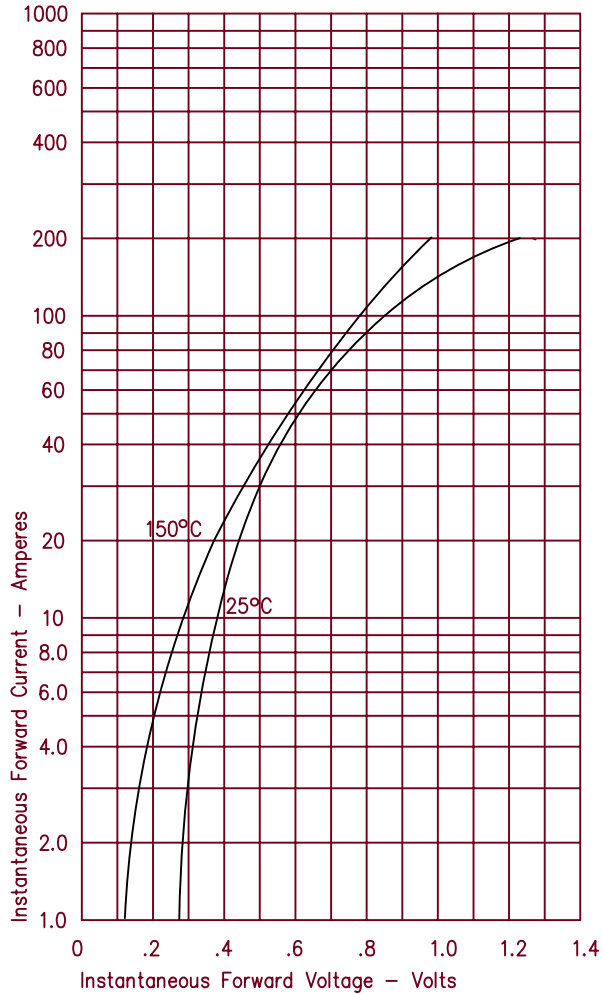


Figure 3
Typical Junction Capacitance

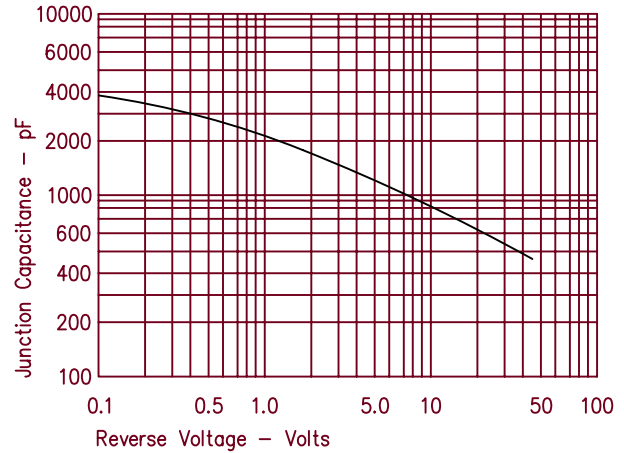


Figure 4
Forward Current Derating

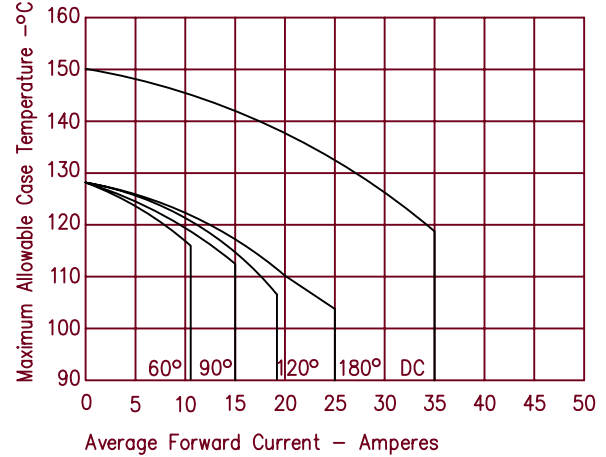


Figure 2
Typical Reverse Characteristics

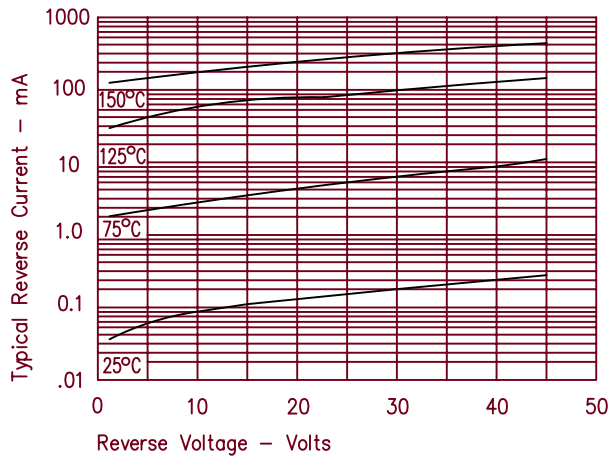


Figure 5
Maximum Forward Power Dissipation

