

REV	CHANGE DESCRIPTION	NAME	DATE
A	Release		3-20-05
B	Additional External Resistors Required by Revision B Device		3-28-05
C	Added A11 Detail to FIFO_SEL Description		5-19-05
D	Added VDD_REF (pin 8) Decoupling Cap		3-30-07
E	Added EECLK (pin 69) Special Instruction		7-19-07

Any assistance, services, comments, information, or suggestions provided by SMSC (including without limitation any comments to the effect that the Company's product designs do not require any changes) (collectively, "SMSC Feedback") are provided solely for the purpose of assisting the Company in the Company's attempt to optimize compatibility of the Company's product designs with certain SMSC products. SMSC does not promise that such compatibility optimization will actually be achieved. Circuit diagrams utilizing SMSC products are included as a means of illustrating typical applications; consequently, complete information sufficient for construction purposes is not necessarily given. Although the information has been checked and is believed to be accurate, no responsibility is assumed for inaccuracies. SMSC reserves the right to make changes to specifications and product descriptions at any time without notice.

Document Description

Schematic Checklist for the LAN9118, 100-pin TQFP Package



SMSC
80 Arkay Drive
Hauppauge, New York 11788

Document Number

Revision

SC471189

E

Schematic Checklist for LAN9118

Information Particular for the 100-pin TQFP Package

LAN9118 TQFP Phy Interface:

1. TPO+ (pin 79); This pin is the transmit twisted pair output positive connection from the internal phy. It requires a 49.9Ω , 1.0% pull-up resistor to VDD_A (created from +3.3V). This pin also connects to the transmit channel of the magnetics.
2. TPO- (pin 78); This pin is the transmit twisted pair output negative connection from the internal phy. It requires a 49.9Ω , 1.0% pull-up resistor to VDD_A (created from +3.3V). This pin also connects to the transmit channel of the magnetics.
3. For Transmit Channel connection and termination details, refer to Figure 1.
4. TPI+ (pin 83); This pin is the receive twisted pair input positive connection to the internal phy. This pin must be AC coupled to the receive channel of the magnetics. This is accomplished by a series $6.8\text{ }\eta\text{F}$ capacitor connecting it to the magnetics. This pin also requires a 49.9Ω , 1.0% termination, AC coupled to digital ground. The capacitor used in this instance is a $0.01\text{ }\mu\text{F}$ to digital ground. The union of the resistor and the $0.01\text{ }\mu\text{F}$ capacitor must be connected to the center tap of the receive channel of the magnetics.
5. TPI- (pin 82); This pin is the receive twisted pair input negative connection to the internal phy. This pin must be AC coupled to the receive channel of the magnetics. This is accomplished by a series $6.8\text{ }\eta\text{F}$ capacitor connecting it to the magnetics. This pin also requires a 49.9Ω , 1.0% termination, AC coupled to digital ground. The capacitor used in this instance is a $0.01\text{ }\mu\text{F}$ to digital ground. The union of the resistor and the $0.01\text{ }\mu\text{F}$ capacitor must be connected to the center tap of the receive channel of the magnetics.
6. Only one $0.01\text{ }\mu\text{F}$ capacitor to digital ground is required. It is shared by both 49.9Ω resistors
7. Together, the two 49.9Ω resistors form a 100Ω termination that the Ethernet receive channel requires.
8. For Receive Channel connection and termination details, refer to Figure 2.

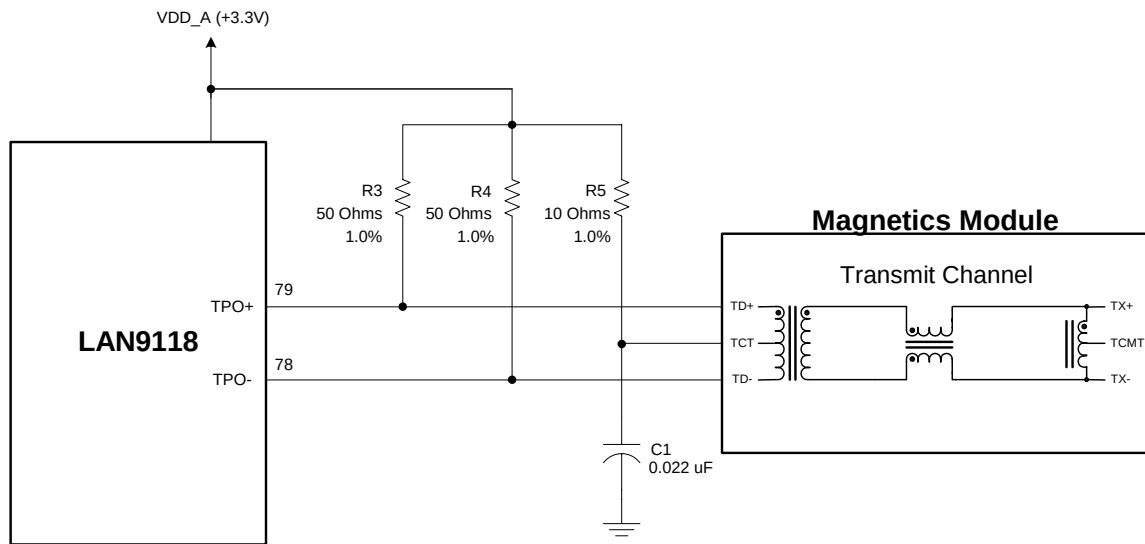


Figure 1 – Transmit Channel Connections and Terminations

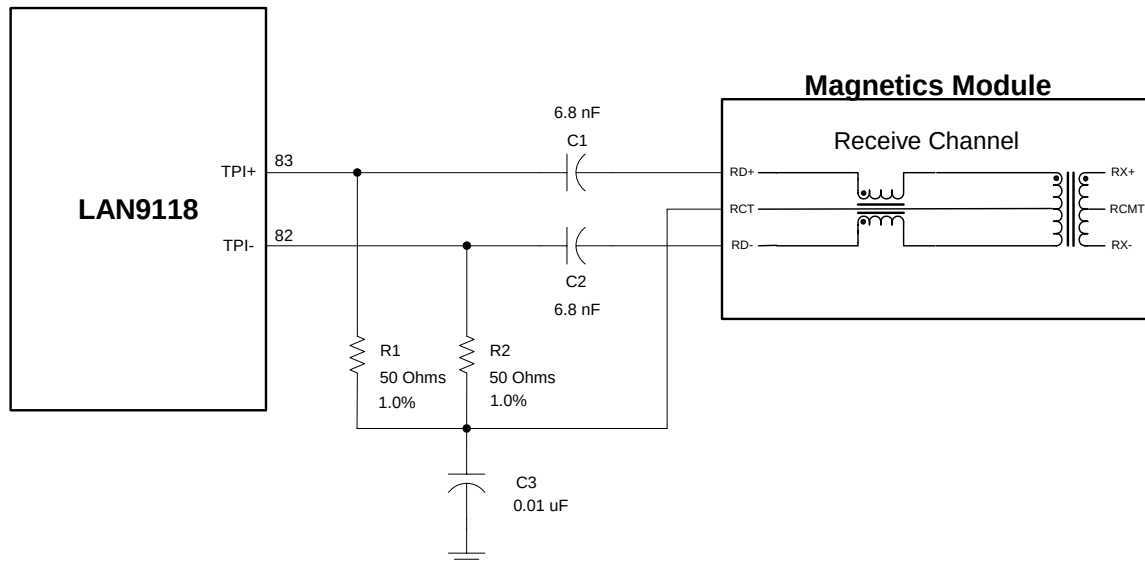


Figure 2 - Receive Channel Connections and Terminations

LAN9118 TQFP Magnetics:

1. The center tap connection on the LAN9118 side for the transmit channel must be connected to VDD_A (created from +3.3V) through a 10.0Ω series resistor. This resistor must have a tolerance of 1.0%. The transmit channel center tap of the magnetics also requires a $0.022\ \mu\text{F}$ capacitor terminated to digital ground.
2. The center tap connection on the LAN9118 side for the receive channel must be referenced to the 100Ω termination of the receive channel. This is accomplished by connecting the receive channel center tap to the union of the (2) 49.9Ω resistors and the $0.01\ \mu\text{F}$ capacitor as described in the above section.
3. The center tap connection on the cable side (RJ45 side) for the transmit channel should be terminated with a 75Ω resistor through a $1000\ \mu\text{F}$, 2KV capacitor (C_{magterm}) to chassis ground.
4. The center tap connection on the cable side (RJ45 side) for the receive channel should be terminated with a 75Ω resistor through a $1000\ \mu\text{F}$, 2KV capacitor (C_{magterm}) to chassis ground.
5. Only one $1000\ \mu\text{F}$, 2KV capacitor (C_{magterm}) to chassis ground is required. It is shared by both TX & RX center taps.
6. Assuming the design of an end-point device (NIC), pin 1 of the RJ45 is TX+ and should trace through the magnetics to TPO+ (pin 79) of the LAN9118 TQFP.
7. Assuming the design of an end-point device (NIC), pin 2 of the RJ45 is TX- and should trace through the magnetics to TPO- (pin 78) of the LAN9118 TQFP.
8. Assuming the design of an end-point device (NIC), pin 3 of the RJ45 is RX+ and should trace through the magnetics to TPI+ (pin 83) of the LAN9118 TQFP.
9. Assuming the design of an end-point device (NIC), pin 6 of the RJ45 is RX- and should trace through the magnetics to TPI- (pin 82) of the LAN9118 TQFP.

RJ45 Connector:

1. Pins 4 & 5 of the RJ45 connector connect to one pair of unused wires in CAT-5 type cables. These should be terminated to chassis ground through a 1000 pF, 2KV capacitor (C_{rjterm}). There are two methods of accomplishing this:
 - a) Pins 4 & 5 can be connected together with two 49.9 Ω resistors. The common connection of these resistors should be connected through a third 49.9 Ω to the 1000 pF, 2KV capacitor (C_{rjterm}).
 - b) For a lower component count, the resistors can be combined. The two 49.9 Ω resistors in parallel look like a 25 Ω resistor. The 25 Ω resistor in series with the 49.9 Ω makes the whole circuit look like a 75 Ω resistor. So, by shorting pins 4 & 5 together on the RJ45 and terminating them with a 75 Ω resistor in series with the 1000 pF, 2KV capacitor (C_{rjterm}) to chassis ground, creates an equivalent circuit.
2. Pins 7 & 8 of the RJ45 connector connect to one pair of unused wires in CAT-5 type cables. These should be terminated to chassis ground through a 1000 pF, 2KV capacitor (C_{rjterm}). There are two methods of accomplishing this:
 - a) Pins 7 & 8 can be connected together with two 49.9 Ω resistors. The common connection of these resistors should be connected through a third 49.9 Ω to the 1000 pF, 2KV capacitor (C_{rjterm}).
 - b) For a lower component count, the resistors can be combined. The two 49.9 Ω resistors in parallel look like a 25 Ω resistor. The 25 Ω resistor in series with the 49.9 Ω makes the whole circuit look like a 75 Ω resistor. So, by shorting pins 4 & 5 together on the RJ45 and terminating them with a 75 Ω resistor in series with the 1000 pF, 2KV capacitor (C_{rjterm}) to chassis ground, creates an equivalent circuit.
3. The RJ45 shield should be attached directly to chassis ground.

Power Supply Connections:

1. The digital supply (VDD_IO) pins on the LAN9118 TQFP are 20, 28, 35, 42, 48, 55, 61 & 97. They require a connection to +3.3V.
2. Each power pin should have one .01 μ F (or smaller) capacitor to decouple the LAN9118. The capacitor size should be SMD_0603 or smaller.
3. The analog supply (VDD_A) pins on the LAN9118 TQFP are 81, 85, 89 & (91). They require a connection to +3.3V through a ferrite bead. Be sure to place bulk capacitance on each side of the ferrite bead. For Rev B devices only, pin (91) may be left as a No-Connect.
4. Each VDD_A pin should have one .01 μ F (or smaller) capacitor to decouple the LAN9118. The capacitor size should be SMD_0603 or smaller.
5. Pin 2 (VREG_3.3) is a supply voltage for the two separate internal +1.8V regulators. This pin must be connected to +3.3V.
6. The VREG_3.3 pin should have one .01 μ F (or smaller) capacitor to decouple the LAN9118. The capacitor size should be SMD_0603 or smaller.
7. VDD_REF (pin 8), this pin serves as the voltage supply for the internal PLL of the LAN9118. This pin must always be at the same potential as the VDD_IO (+3.3V) power supply pins.
8. The VDD_REF pin should have one .01 μ F (or smaller) capacitor to decouple the LAN9118. The capacitor size should be SMD_0603 or smaller.

Ground Connections:

1. The digital ground pins (GND_IO) on the LAN9118 TQFP are 19, 27, 34, 41, 47, 54, 60 & 96. They need to be connected directly to a solid, contiguous ground plane.
2. The analog ground pins (VSS_A) on the LAN9118 TQFP are 77, 80, 86, 88 & (90). They also need to be connected directly to the same solid, contiguous ground plane. For Rev B devices only, pin (90) may be left as a No-Connect.
3. We recommend that the Digital Ground pins and the AVSS pins be tied together to the same ground plane. We do not recommend running separate ground planes for any of our LAN products.
4. There are two core grounds on the LAN9118. These grounds are pins 1 & 66 (GND_CORE). They also need to be connected to the same solid, contiguous ground plane as above.
5. There is one PLL ground on the LAN9118. This ground is pin 4 (VSS_PLL). Again, this pin must be connected to the same digital ground plane as above.

Voltage Reference Inputs:

1. ATEST (pin 9), this pin serves as a plus voltage reference input to the LAN9118. This pin must always be at the same potential as the VDD_REF pin (pin 8,+3.3V).

Ground Reference Inputs:

1. VSS_REF (pin 11), this pin serves as a ground reference for the internal PLL (in conjunction with the VDD_REF pin). This pin must be connected directly the digital ground plane.

VDD_CORE_1.8V:

1. VDD_CORE (pins 3 & 65), these two pins are used to provide bypassing for the +1.8V core regulator. Each pin requires a 0.01 μF decoupling capacitor. Each capacitor should be located as close as possible to its pin without using vias. In addition, pin 3 requires a bulk capacitor placed as close as possible to pin 3. The bulk capacitor must have a value of at least 10 μF , and have an ESR (equivalent series resistance) of no more than 2.0 Ω . SMSC recommends a very low ESR ceramic capacitor for design stability. Other values, tolerances & characteristics are not recommended.

Caution: Even though both are +1.8V levels, **Do Not Connect** VDD_CORE_1.8V to VDD_PLL_1.8V.

Caution: This +1.8V supply is for internal logic only. **Do Not** power other circuits or devices with this supply.

VDD_PLL_1.8V:

1. VDD_PLL (pin 7), this pin is used to provide an external supply decoupling capacitor to the internal +1.8V PLL regulator. A 0.01 μF decoupling capacitor must be attached to this pin. The capacitor should be located as close as possible to pin 7, and must be attached without using vias. In addition, a bulk capacitor must also be attached to this pin. The bulk capacitor must have a value of at least 10 μF , and must have a very low ESR (equivalent series resistance) of less than 2.0 Ω . SMSC recommends a very low ESR ceramic capacitor for design stability. Other values, tolerances & characteristics are not recommended.

Caution: Even though both are +1.8V levels, **Do Not Connect** VDD_PLL_1.8V to VDD_CORE_1.8V.

Caution: This +1.8V supply is for internal logic only. **Do Not** power other circuits or devices with this supply.

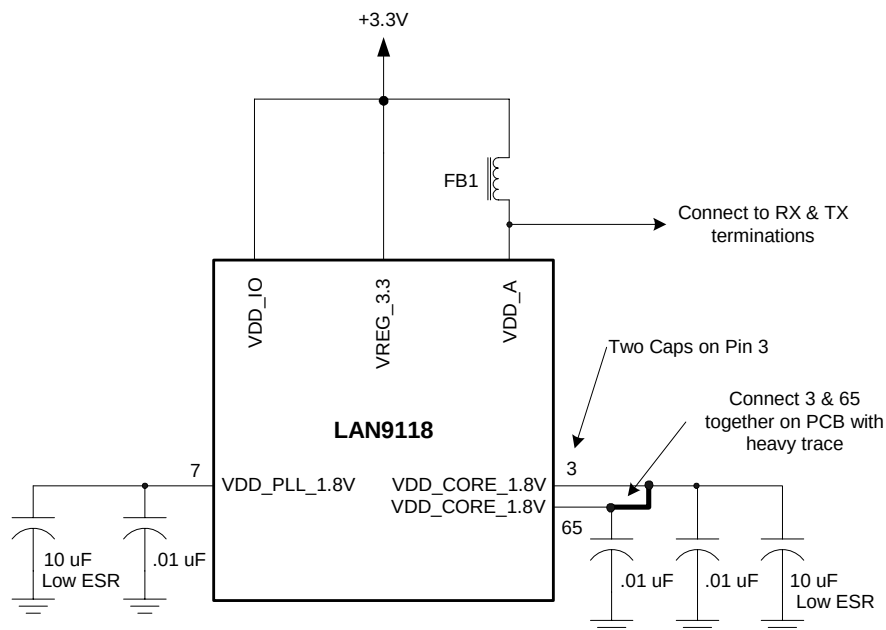


Figure 3 - LAN9118 Power Connections

Crystal Connections:

1. A 25.000 MHz crystal must be used with the LAN9118 TQFP. For exact specifications and tolerances refer to the latest revision LAN9118 data sheet.
2. XTAL1 (pin 6) on the LAN9118 TQFP is the clock circuit input. This pin requires a 15 – 33 μ F capacitor to digital ground. One side of the crystal connects to this pin.
3. XTAL2 (pin 5) on the LAN9118 TQFP is the clock circuit output. We recommend placing a 0 Ω resistor in series with this pin to the crystal for future EMI considerations. The other side of the resistor can then connect to a matching 15 – 33 μ F capacitor to ground and the other side of the crystal.
4. Since every system design is unique, the value for the series resistor and the capacitor values are system dependant. The PCB design, the crystal selected, the layout and the type of caps selected all contribute to the characteristics of this circuit. Once the board is complete and operational, it is up to the system engineer to analyze this circuit in a lab environment. The system engineer should verify the frequency, the stability and the voltage level of the circuit to guarantee that the circuit meets all design criteria as put forth in the data sheet.
5. **Revision B Device** – For proper operation, an additional 1.0M Ω resistor needs to be added to the crystal circuit. This resistor needs to be placed in parallel with the crystal.

EEPROM Interface:

1. EECS (pin 68) on the LAN9118 TQFP connects to the external EEPROM's CS pin.
2. EECLK (pin 69) on the LAN9118 TQFP connects to the external EEPROM's serial clock pin.

Caution: To ensure normal device operation, the EECLK pin must be high during any power-up and/or hardware reset event. Do not add any type of external pull-down or grounding connection to this pin as this will result in configuring the device disabled.
3. EEDIO (pin 67) on the LAN9118 TQFP connects to the external EEPROM's Data In pin. This pin on the LAN9118 is a bi-directional pin and it also connects to the EEPROM's Data Out pin through a 1.0K Ω resistor.
4. Be sure to select a 3-wire style 1K EEPROM that is organized for 128 x 8-bit or the ability to be strapped for 128 x 8-bit operation. Recommended EEPROMs can be found in our LAN9118 Designing with the LAN9118 - Getting Started design guide, application note AN 12.5.

RBIAS Resistor:

1. RBIAS (pin 10) on the LAN9118 TQFP should connect to digital ground through a 12.0K Ω resistor with a tolerance of 1.0%. This pin is used to set-up critical bias currents for the internal PLL of the LAN9118.

EXRES1 Resistor:

1. EXRES1 (pin 87) on the LAN9118 TQFP should connect to digital ground through a 12.4K Ω resistor with a tolerance of 1.0%. This pin is used to set-up critical bias currents for the embedded 10/100 Ethernet Physical device.

Required External Pull-ups:

1. IRQ (pin 72) may require an external pull-up resistor if this output is programmed as an Open Drain type.
2. PME (pin 70) may require an external pull-up resistor if this output is programmed as an Open Drain type.
3. GPIO0/nLED1 (pin 98) may require an external pull-up resistor if this pin is programmed in one of two ways. An external pull-up resistor would be required if this pin is programmed for the LED functionality. When programmed for LED functionality, this pin indicates what speed (10/100) the Ethernet phy is currently set for. A pull-up resistor would also be required if this pin is programmed as an Open Drain Output.
4. GPIO1/nLED2 (pin 99) may require an external pull-up resistor if this pin is programmed in one of two ways. An external pull-up resistor would be required if this pin is programmed for the LED functionality. When programmed for LED functionality, this pin indicates Link & Activity status of the Ethernet phy. A pull-up resistor would also be required if this pin is programmed as an Open Drain Output.
5. GPIO2/nLED3 (pin 100) may require an external pull-up resistor if this pin is programmed in one of two ways. An external pull-up resistor would be required if this pin is programmed for the LED functionality. When programmed for LED functionality, this pin indicates what duplex mode (half/full) the Ethernet phy is currently set for. A pull-up resistor would also be required if this pin is programmed as an Open Drain Output.

CPU Interface:

1. A1 – A7 Address Bus: Please refer to the latest revision of the LAN9118 Application Note for exact implementation of the CPU interface selected.
2. D0 – D31 Data Bus: Please refer to the latest revision of the LAN9118 Application Note for exact implementation of the CPU interface selected.
3. If D[16:31] are not used by the system, do not terminate on the board level. These pins have the proper internal terminations and should be left as no-connects.
4. Control Signals: Please refer to the latest revision of the LAN9118 Application Note for exact implementation of the CPU interface selected.
5. The LAN9118 is a Little Endian LAN device. It is the designers' responsibility to ensure that the selected CPU has compatible Endianness, as this may affect Data Bus connections to the LAN9118. For example, if a Big Endian processor is used in conjunction with the LAN9118, it may be necessary to swap data bus byte lanes in order to ensure proper system operation. Please refer to the latest LAN9118 data sheet and design guides to determine compatibility.

Miscellaneous:

1. There are four No-Connect pins on the LAN9118. It is very important that these pins remain as no-connects. These pins are 71, 73, 75 & 84.
2. EEDIO (pin 67), in addition to this pin's function as the bi-directional data path for the EEPROM, this pin has a secondary function during reset. Upon the deassertion of reset, this pin selects the Data Bus Width depending upon what state it is in.

When this pin is high, 32-bit data bus width operation is selected. This pin has a weak internal pull-up resistor. For 32-bit mode, this pin can be left as a no-connect.

When this pin is low, 16-bit data bus width operation is selected. A 10.0K Ω pull-down resistor should be used to select this mode.

Revision B Device - The weak internal pull-up resistor has been removed. For 32-bit operation, this pin must be pulled high with an external 10.0K Ω pull-up resistor. This pin can no longer be left as a no-connect.

3. SPEED_SEL (pin 74), upon deassertion of reset, the Default Ethernet Settings are established.

If this pin is high, the LAN9118 will default to 100BASE-TX, Half Duplex mode with Auto Negotiation enabled. This pin has a weak internal pull-up resistor, so, for this mode, this pin can be left as a no-connect.

With this pin low, the default setting will be 10BASE-T, Half Duplex with Auto Negotiation disabled. A 1.0K Ω pull-down resistor should be used for this purpose.

4. FIFO_SEL (pin 76), when driven high, all accesses to the LAN9118 are to the RX or TX Data FIFOs. In this mode, the address input is ignored. This pin has a weak internal pull-down resistor. For normal operation, this pin can be left as a no-connect. Typical use will involve connecting an upper address line (A11 is recommended) to this pin to determine functionality.

Revision B Device - The weak internal pull-down resistor has been removed. For normal operation, a 1.0K Ω external pull-down resistor must be attached to this pin. This pin can no longer be left as a no-connect.

5. nRESET (pin 95), this pin is an active-low reset input. This signal resets all logic and registers within the LAN9118. This signal is pulled high with a weak internal pull-up resistor. If nRESET is left unconnected the LAN9118 will rely on its internal power-on reset circuitry.
6. Incorporate a large SMD resistor (SMD_1210) to connect the chassis ground to the digital ground. This will allow some flexibility at EMI testing for different grounding options. Leave the resistor out, the two grounds are separate. Short them together with a zero ohm resistor. Short them together with a cap or a ferrite bead for best performance.
7. Be sure to incorporate enough bulk capacitors (4.7 - 22 μ F caps) for each power plane.

LAN9118 TQFP QuickCheck Pinout Table:

Use the following table to check the LAN9118 TQFP shape in your schematic.

LAN9118 TQFP							
Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name
1	GND_CORE	26	D26	51	D9	76	FIFO_SEL
2	VREG	27	GND_IO	52	D8	77	VSS_A
3	VDD_CORE	28	VDD_IO	53	D7	78	TPO-
4	VSS_PLL	29	D25	54	GND_IO	79	TPO+
5	XTAL2	30	D24	55	VDD_IO	80	VSS_A
6	XTAL1	31	D23	56	D6	81	VDD_A
7	VDD_PLL	32	D22	57	D5	82	TPI-
8	VDD_REF	33	D21	58	D4	83	TPI+
9	ATEST	34	GND_IO	59	D3	84	NC
10	RBIAS	35	VDD_IO	60	GND_IO	85	VDD_A
11	VSS_REF	36	D20	61	VDD_IO	86	VSS_A
12	A7	37	D19	62	D2	87	EXRES1
13	A6	38	D18	63	D1	88	VSS_A
14	A5	39	D17	64	D0	89	VDD_A
15	A4	40	D16	65	VDD_CORE	90	VSS_A
16	A3	41	GND_IO	66	GND_CORE	91	VDD_A
17	A2	42	VDD_IO	67	EEDIO	92	nRD
18	A1	43	D15	68	EECS	93	nWR
19	GND_IO	44	D14	69	EECLK	94	nCS
20	VDD_IO	45	D13	70	PME	95	nRESET
21	D31	46	D12	71	NC	96	GND_IO
22	D30	47	GND_IO	72	IRQ	97	VDD_IO
23	D29	48	VDD_IO	73	NC	98	nLED1
24	D28	49	D11	74	SPEED_SEL	99	nLED2
25	D27	50	D10	75	NC	100	nLED3

Notes:

1. Pin 91 may be left as a No Connection; for backward compatibility, connect to VDD_A.
2. Pin 90 may be left as a No Connection; for backward compatibility, connect to VSS_A.

Reference Material:

1. SMSC LAN9118 Data Sheet; check web site for latest revision.
2. SMSC LAN9118 EVB Schematic, Assembly No. 6379 (Polaris); check web site for latest revision.
3. SMSC LAN9118 EVB PCB, Assembly No. 6379 (Polaris); order PCB from web site.
4. SMSC LAN9118 EVB PCB Bill of Materials, Assembly No. 6379 (Polaris); check web site for latest revision.
5. SMSC LAN9118 Design Guide, Designing with the LAN9118 – Getting Started, Application Note AN 12.5; check web site for latest revision.
6. SMSC LAN9118 Programmers Reference Guide, Application Note AN 12.12; check web site for latest revision.
7. SMSC LAN9118 Power Consumption Values, Application Note AN 12.10; check web site for latest revision.
8. SMSC Suggested Magnetics Application Note 8-13; check web site for latest revision.