

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	ECR-11-011294	26MAY2011	SR	AR
	B2	ECR-11-011684	06JUN2011	SR	AR
	B3	ECR-11-012551	16JUN2011	VG	AR
	B4	ADDED RETENTION FORCE	26JUN2023	G.K	S.P

- 1 2.5µm Sn OVER 1.3µm Ni
- 31 2 PACKAGING:
30 PIN HEADER PACKED IN TRAY
8 TRAYS PACKED INTO SHIPPING BOX
TOTAL PACKAGING UNIT PER BOX: 240 PARTS

3 ALL 6.5 DIMENSIONS $\oplus 0.1$ C-D

4 WAVE SOLDER CAPABLE TO 240° C


5 PIN RETENTION FORCE IN X-DIRECTION MIN. 20N

- 1 2.5µm Sn UEBER 1.3µm Ni
- 31 2 VERPACKUNG:
30 STIFTSTECKER IN PRODUKTTRAEGER VERPACKT
8 PRODUKTTRAEGER VERPACKT IN KARTON
KOMPLETTPACK EINHEIT: 240 TEILE

3 ALLE 6.5 MASSE $\oplus 0.1$ C-D

4 LOETFAEHIGKEIT BIS MAX. 240° C




5 PIN-HALTEKRAFT IN X-RICHTUNG MIN. 20N

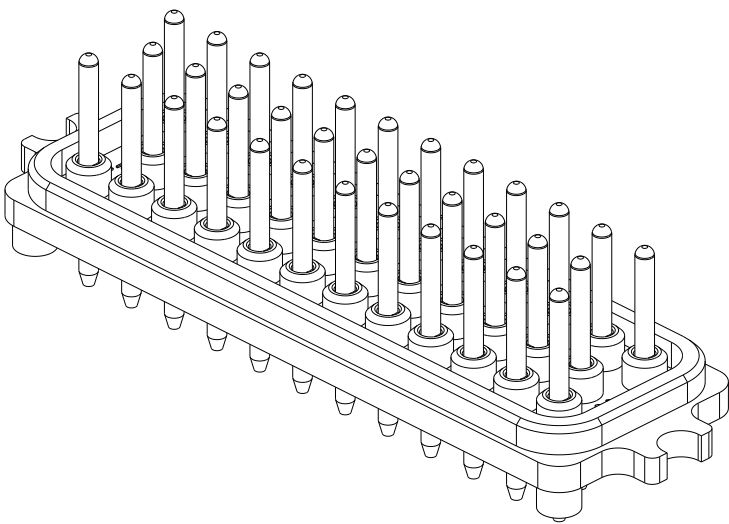


-	-	-	35	-	PIN STIFT	2
-	-	-	1	1	PIN HOUSING STIFTGEHAEUSE	1
-	-	-	-1	REV.	DESCRIPTION	ITEM NO
-	-	-	-	←	REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG. REVISION)	
QTY REQD PER ASSY			PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN 290CT2010 R.SCHNEIDER	TE Connectivity		
			CHK 290CT2010 A.ROESGEN			
			APVD 290CT2010 Z.LAMPERT	NAME AMP SEAL PIN HEADER 35 POS.		
			PRODUCT SPEC 108-1329			
			APPLICATION SPEC 114-16016			
			WEIGHT -			
			CUSTOMER DRAWING	SCALE 5:1		SHEET 1 OF 1
						REV B4


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=1103599	-

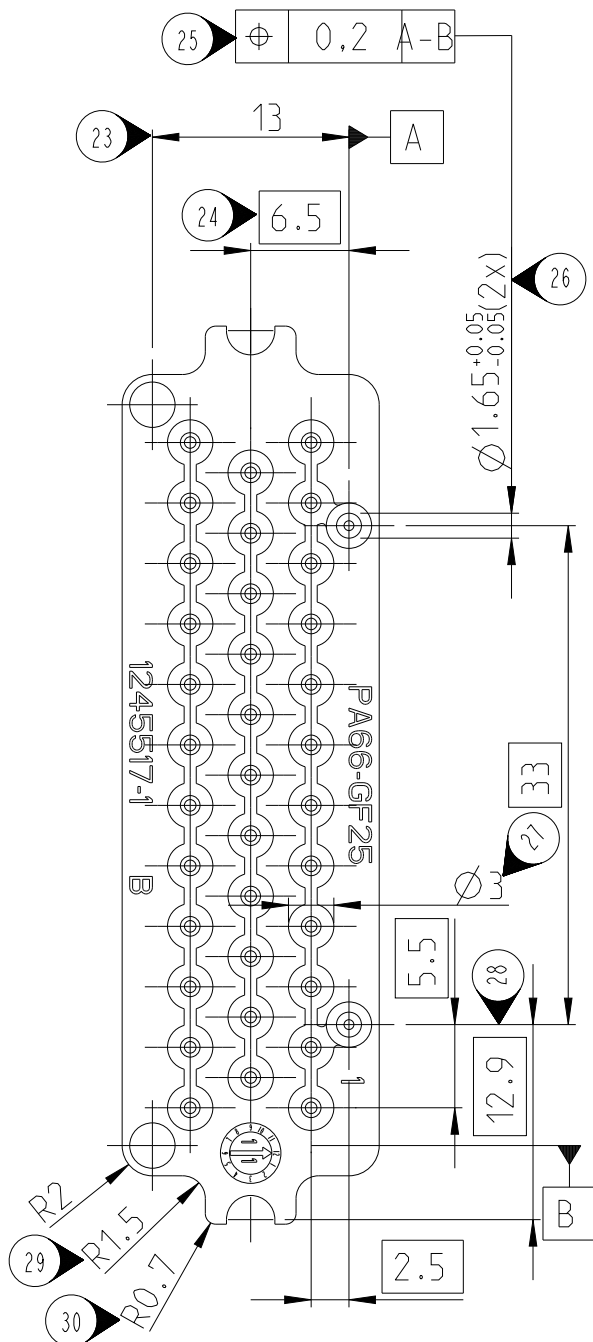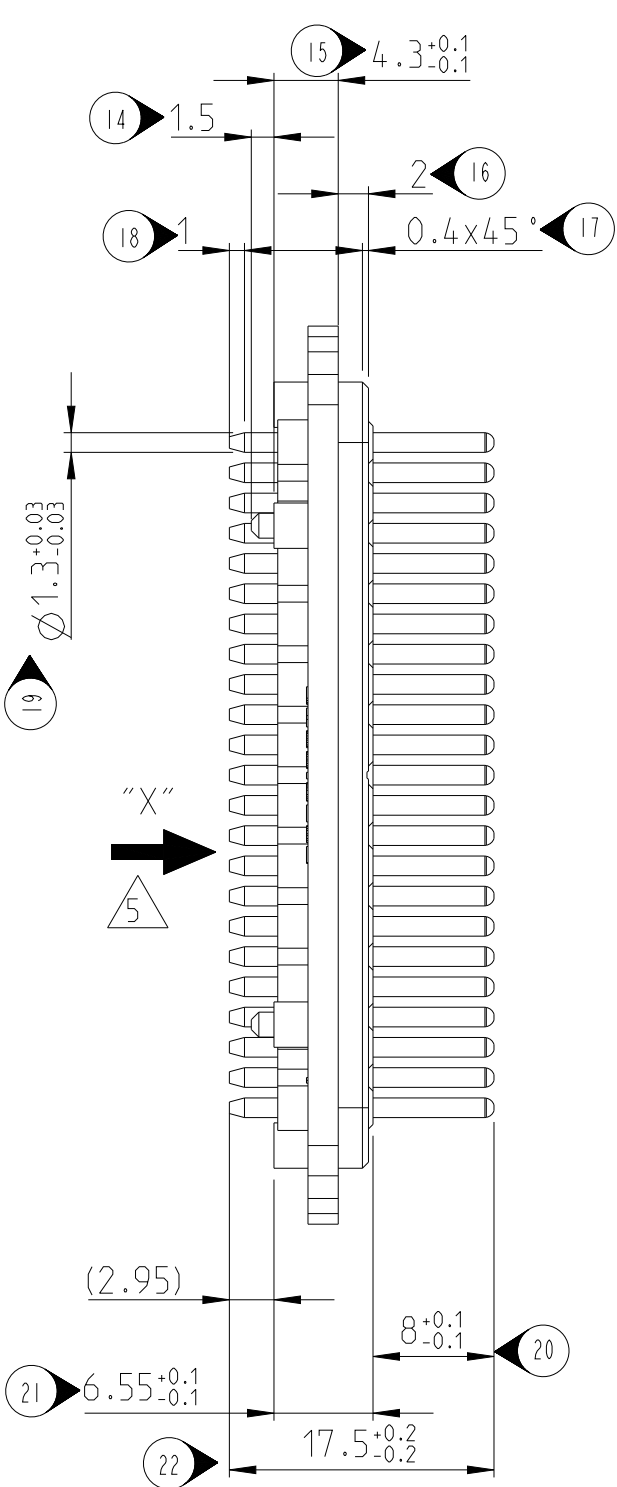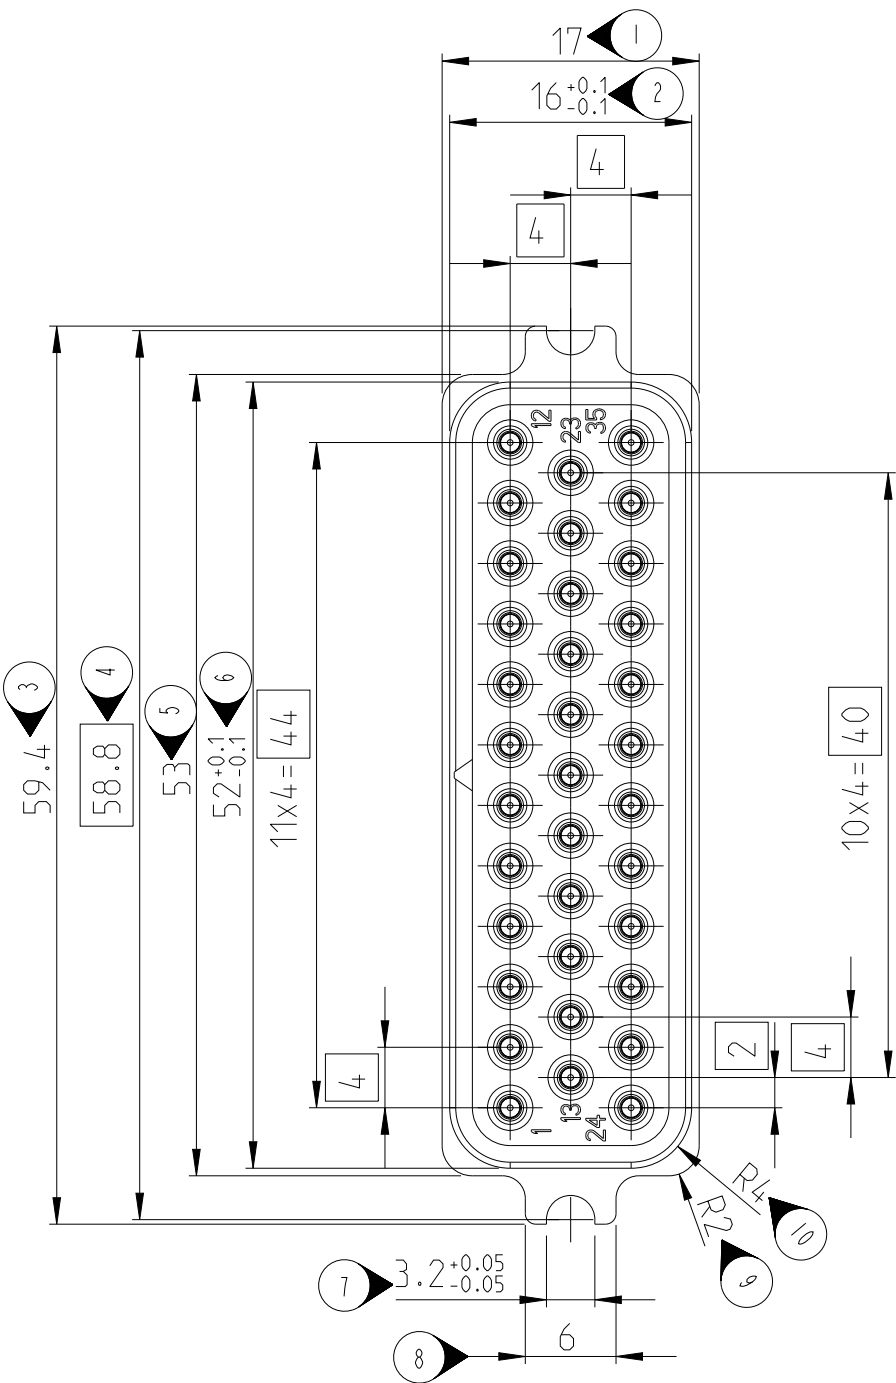

RECOMMENDED PC-BOARD LAYOUT
EMPFOHLENES LEITERPLATTENLAYOUT

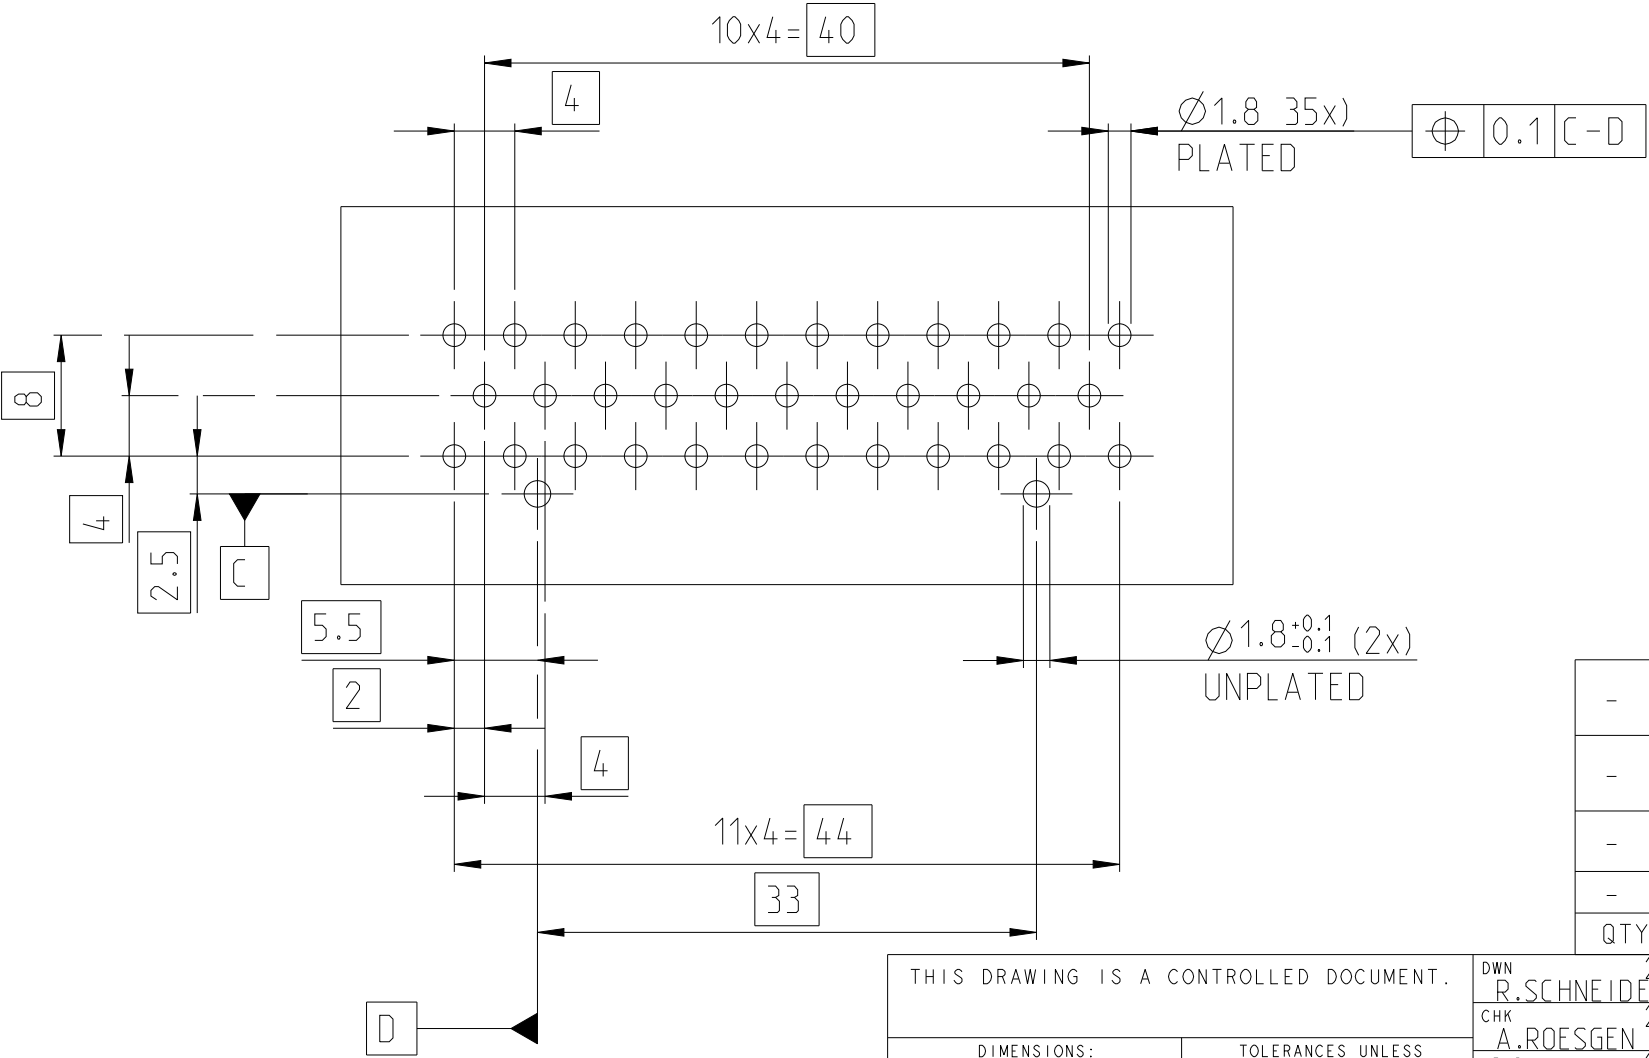

INSTALLATION HEIGHT OF PIN HEADER FOR SAFE CONTACTING WITH SOCKET CONNECTOR
EINBAUHOHE DER STIFTELEISTE FUER SICHERE KONTAKTIERUNG MIT BUCHSENSTECKER

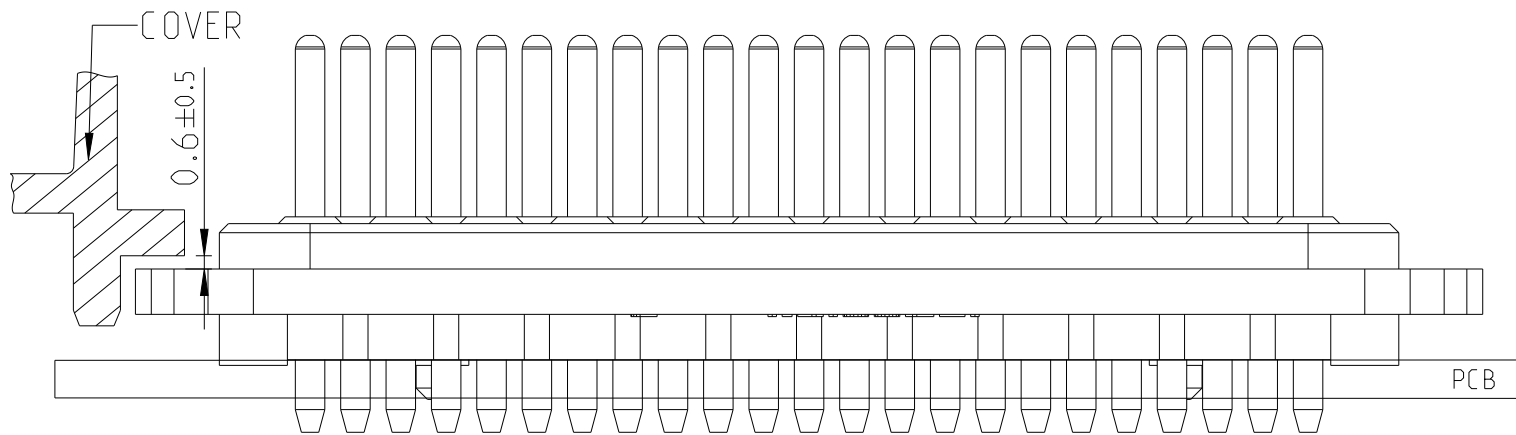

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1103599-1](#)