

EOL - Modlink MSDD-set: Frame 4000-68223-0000000,

discontinued - End of Life Date: 2024-12-31


Art.No.: 4000-68223-0030200

Weight: 0.422

Country of origin: CZ

Model designation: X MSDD_2MVIPK_NEMA5-15L_2X9BU/ST_

[Link to Product](#)**Illustration**

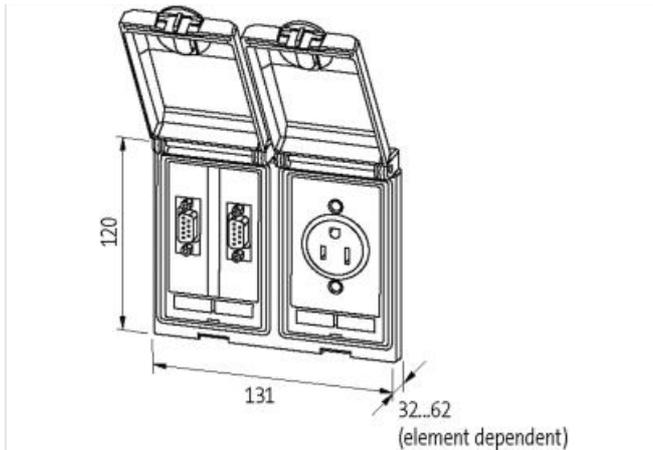

Product may differ from Image



Commercial data

ECLASS-6.0	27189217
ECLASS-6.1	27189217
ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27182806
ECLASS-10.1	27182806
ECLASS-11.1	27182806
ECLASS-12.0	27182806
ETIM-5.0	EC002625
ETIM-6.0	EC002625
ETIM-7.0	EC002625
ETIM-8.0	EC002625
customs tariff number	85389099
customs tariff number	85389099
customs tariff number	85389099
EAN	4048879033077
EAN	4048879033077
EAN	4048879033077
Packaging unit	1
Packaging unit	1
Packaging unit	1

Frame

Degree of protection (EN IEC 60529)	IP65
Operating temperature min.	-10 °C
Operating temperature max.	60 °C
Storage temperature min.	-25 °C
Storage temperature max.	60 °C
Suitable for installation wall thickness min.	1 mm
Suitable for installation wall thickness max.	5 mm
Material housing	Fine zinc die casting
Coating housing	surface finished
Material lid	PC

Color cover transparent

USA

Connection geometry 4.8 x 0.5 mm

Operating voltage AC 125 V

Operating current 15 A

Connection Plug-solder connection

No. of poles 2 + PE

Protection contact present yes

SUB-D9

Operating voltage AC 48 V

Operating voltage DC 48 V

Operating voltage AC max. (UL-listed) 30 V

Operating voltage DC max. (UL-listed) 42,4 V

Operating current 3 A

Current operating max. (UL) 175 mA

Family construction form SUB-D9

Family type Back side SUB-D9

Gender female

Gender Rear male

Looking techniques Standard UNC 4-40 screw thread bolt (EN 60807)

No. of poles 9

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Murrelektronik:](#)

[4000-68223-0030200](#)