



RECOMMENDED PCB LAYOUT (COMPONENT MOUNTING SIDE)
LOCHBILD FÜR LEITERPLATTE (BESTÜCKUNGSSEITE)
TOL ±0.05 [.002] UNLESS NOTED

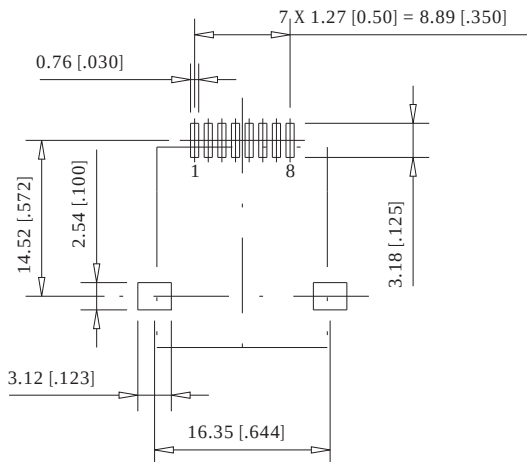

RECOMMENDED PANEL
CUTOUT
EMPFOHLENER FRONTPLATTEN AUSSCHNITT



MATERIALS AND FINISH

HOUSING: GLASS FILLED POLYESTER UL 94 V-0 BLACK
CONTACTS: PHOSPHOR BRONZE
CONTACT FINISH: Au, 0.8µm [30µin]
TERMINAL FINISH: Sn

MECHANICAL CHARACTERISTICS

DURABILITY: 1000 MATING CYCLES

ELECTRICAL CHARACTERISTICS

CURRENT/VOLTAGE: 150 Vac AT 1.5 AMPS MAX AT 25°C
DIELECTRIC WITHSTANDING VOLTAGE: 1000 Vrms MIN, 60Hz
INSULATION RESISTANCE: 500 MEGAOHMS MIN
CONTACT RESISTANCE: 30 MILLIOHMS MAX

NOTE 1: WITH SOLDER TABS (ST)

NOTE 2: C-UL APPROVED E145613 AND MEETS FCC REQUIREMENTS

Consider protection memo from DIN 34

Information:				Tolerances		 All Dimensions in mm[in]	Scale 2:1	
MAXCONN P.N.: MJL-S-88-ST-30								
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation		
						MOD JACK - MJL 8P8C, 1X1, SMT		
				 ERNI Components CHESTER, VA U.S.A.		133904		I
Rev.		Date				Group/Type	MAXMJ	

Consider protection memo from DIN 34