

SLPPI2016 / SLPPI2520 Series

High Power Inductors

Signal Transformer is introducing the beginning of a new family of low-profile high-power inductors (SLPPI) with the release of SLPPI2016/2520. Height profiles of 1.0 mm to 1.2 mm, small footprints of 2.0 mm x 2.5 mm to 1.6 mm x 2.0 mm and broad range of inductance and current ratings, make them ideal for a wide range of applications. Due to their magnetic shielding, SLPPI's can be located adjacent to sensitive circuits, thus enabling higher density designs.

Molded inductors are robust structures, consisting of a pressed core material that prevents both air and noise intrusion thereby enhancing its magnetic performance. They achieve greater inductance and current with less overall volume for unobtrusive placement between tiny devices. Inductance remains stable across a wide current range and drops softly above rated currents, producing power optimization and reliability.

Power inductors are used for a variety of functions including choking, blocking, attenuating, or filtering high frequency noise in electrical circuits and storing energy in power converters (DC-DC or AC-DC) and inverters (DC-AC).



General Features

- Magnetically shielded
- Low profile
- Compact design for high density devices
- Low power loss with reduced DCR
- Excellent thermal characteristics over working temperature range
- Wide range of inductance values
- Operating temperature range greater than most competitors

Specifications

- Saturation current (I_{sat}): 1.6 A to 7.0 A max. The current which will cause L0 (zero ampere inductance) to drop approximately 30% typical
- Temperature rise current (I_{rms}): 1.6 A to 8.0 A max. The current which will cause a temperature rise of approximately $\Delta T = 40^\circ\text{C}$
- Inductance range: 0.22 μH to 2.2 μH
- Operating temperature range: -55°C to $+125^\circ\text{C}$
- Inductance tolerance: $\pm 20\%$

Applications

- Notebooks / Laptops / Gaming devices
- VRM for servers / Storage Systems / Video over IP devices
- Industrial, Electronic and Telecommunication devices (i.e., mobile phones)
- Television / LCD panels / Audio equipment / Speakers
- Power supplies and Modules
- DC to DC Converters
- AC to DC Converters

PRODUCT IDENTIFICATION

SLPPI 2016 - 12 - R47 M - TR

Type / Product Series

SLPPI = Signal Low Profile Power Inductors

Dimensions

2016 = 2.0 mm x 1.6 mm
2520 = 2.5 mm x 2.0 mm

Profile

10 = 1.0 mm
12 = 1.2 mm

Packaging

TR = Tape & Reel
No code = Bulk

Inductance Tolerance

M = ±20%

Inductance *

R47 = 0.47 µH


* Note: Expressed by three figures. The unit is micro henry (µH). The first and second figures are significant digits, the third figure expresses the number of zeros which follow the two figures (100 = 10 µH)

If there is a decimal point, it is expressed by the capital letter "R" (3R9 = 3.9 µH). In that case, all figures are significant digits.

MECHANICAL SPECIFICATIONS

Dimensions are in mm.

SERIES	A	B	C	D	E	H	I	J
SLPPI2016-10	2.0 ± 0.2	1.6 ± 0.2	1.0 Max	0.5 ± 0.2	1.44	0.9	1.6	2.3
SLPPI2016-12	2.0 ± 0.2	1.6 ± 0.2	1.2 Max	0.5 ± 0.2	1.44	0.9	1.6	2.3
SLPPI2520-10	2.5 ± 0.2	2.0 ± 0.2	1.0 Max	0.6 ± 0.2	1.84	1.2	2.0	2.8
SLPPI2520-12	2.5 ± 0.2	2.0 ± 0.2	1.2 Max	0.6 ± 0.2	1.84	1.2	2.0	2.8

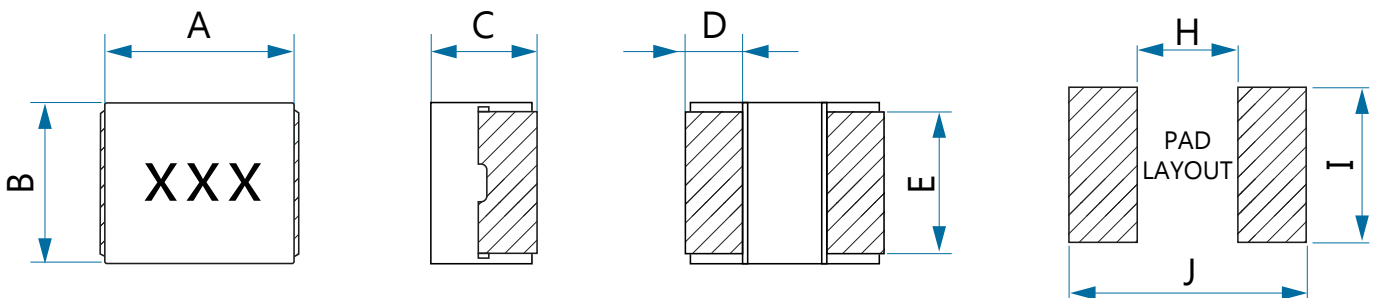

Custom versions available upon request.



128 Atlantic Avenue, Lynbrook, NY 11563
Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208
sales@signaltransformer.com | techhelp@signaltransformer.com

belfuse.com/signal

SLPPI2016 SERIES ELECTRICAL SPECIFICATIONS

Electrical specifications for all part numbers measured at 20°C unless otherwise stated.

Part Number	Inductance L (μ H)	Inductance Tolerance (\pm %)	Typ	DCR (m Ω)	I sat (A)	I rms (A)
				Max	Max	Max
SLPPI2016-10-R24M	0.24	20	17.0	20.5	5.4	4.2
SLPPI2016-10-R33M	0.33	20	25.0	30.0	4.7	3.6
SLPPI2016-10-R47M	0.47	20	32.0	38.0	4.4	3.3
SLPPI2016-10-R68M	0.68	20	42.0	48.0	3.6	2.7
SLPPI2016-10-1R0M	1.00	20	60.0	68.0	2.4	2.3
SLPPI2016-10-1R5M	1.50	20	100	116	1.8	1.8
SLPPI2016-10-2R2M	2.20	20	147	163	1.6	1.6
SLPPI2016-12-R22M	0.24	20	15.0	19.0	5.6	4.4
SLPPI2016-12-R33M	0.33	20	22.0	26.0	4.6	3.9
SLPPI2016-12-R47M	0.47	20	25.0	30.0	3.8	3.4
SLPPI2016-12-R68M	0.68	20	36.0	44.0	3.2	3.0
SLPPI2016-12-1R0M	1.00	20	50.0	60.0	2.5	2.5
SLPPI2016-12-1R5M	1.50	20	86.0	104	2.0	2.0
SLPPI2016-12-2R2M	2.20	20	120	144	1.65	1.6

Notes:

1. Test Condition: 1 MHz, 1.0 Vrms.
2. I sat (Max): DC current (A) that will cause L0 to drop 30% max.
3. I rms (Max): DC current (A) that will cause an Δ T of 40°C max.
4. Operating temperature range includes self-temperature rise.
5. The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Test equipment:

- **L:** Agilent E4980 Precision LCR Meter (Upgraded version of Agilent HP4284A) with HP42841A Current Source
- **DCR:** Milli-ohm meter


Custom versions available upon request.



128 Atlantic Avenue, Lynbrook, NY 11563
 Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208
 sales@signaltransformer.com | techhelp@signaltransformer.com

belfuse.com/signal

SLPPI2016 SERIES - TYPICAL PERFORMANCE CURVES

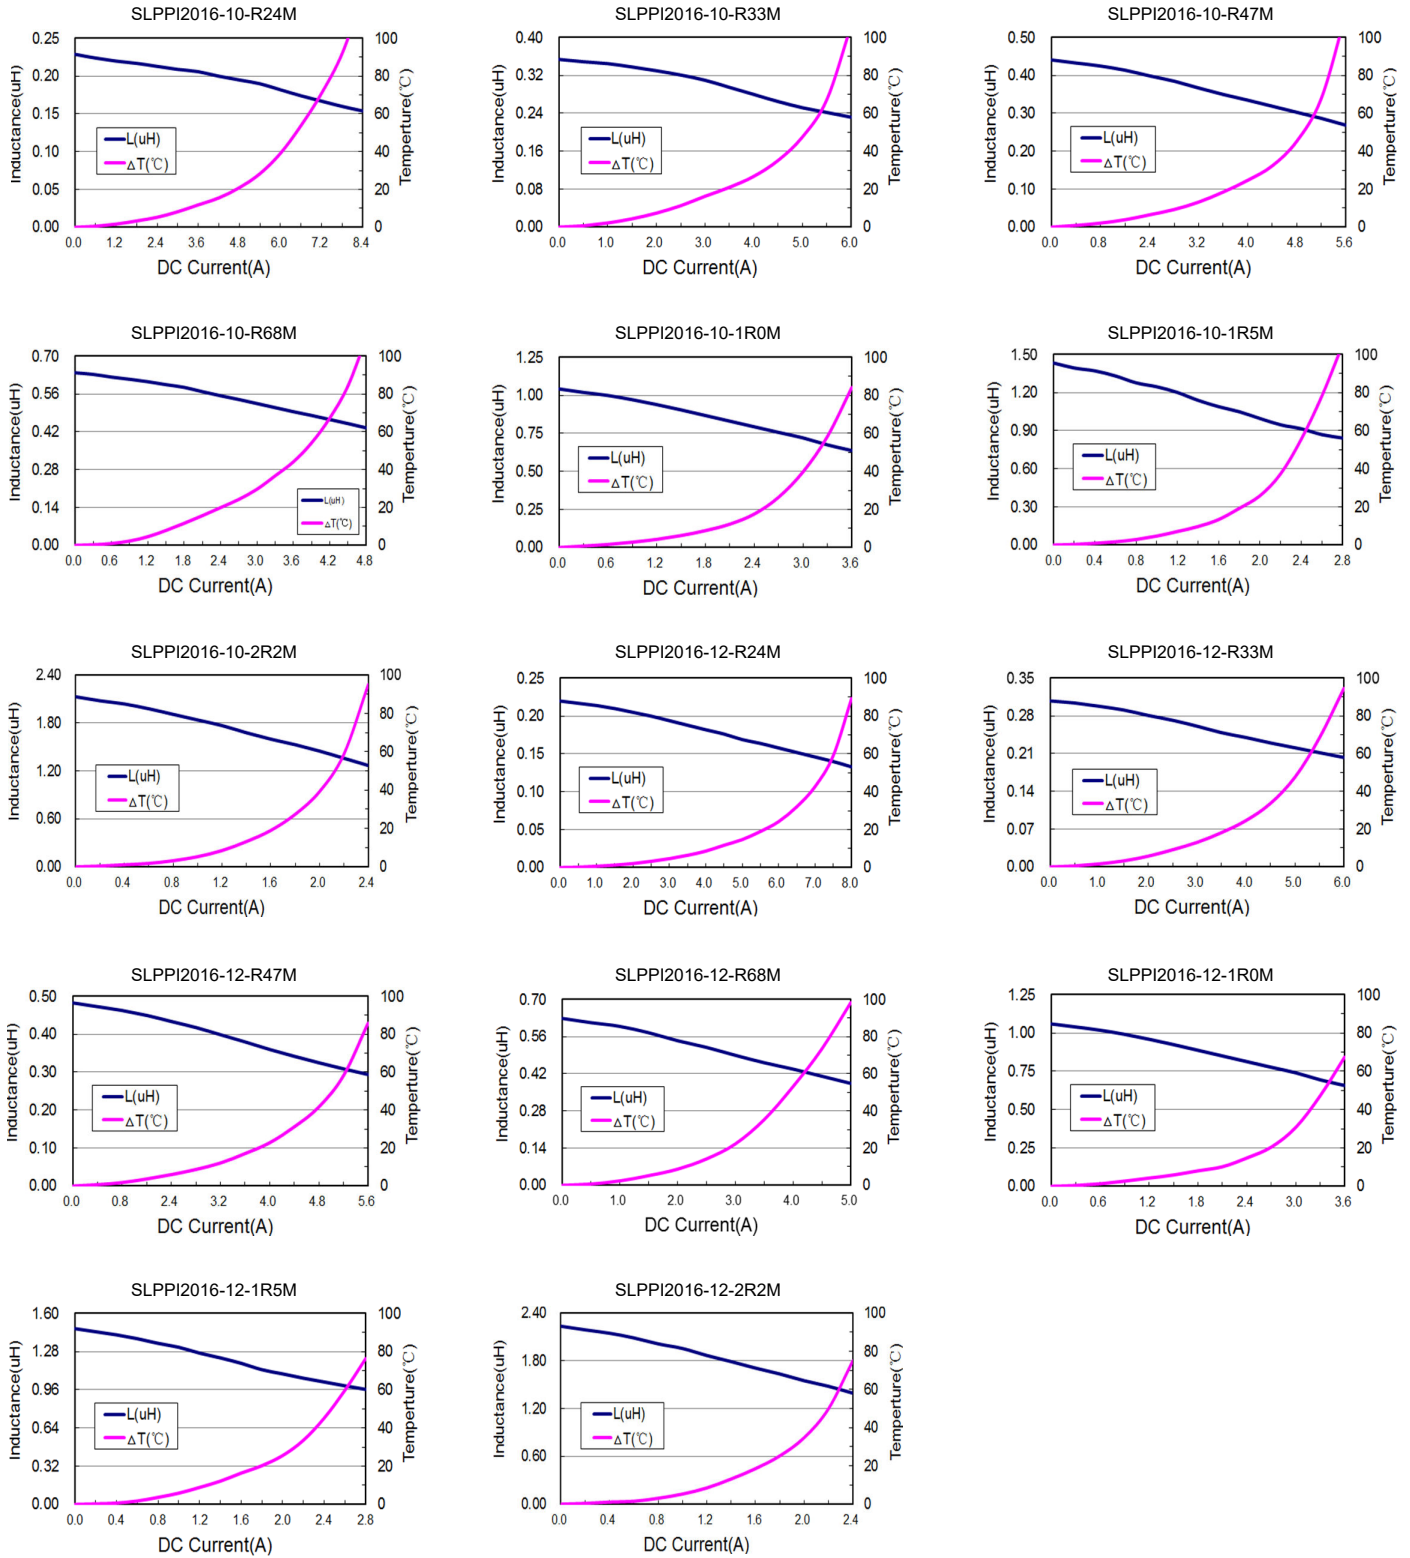

Custom versions available upon request.



128 Atlantic Avenue, Lynbrook, NY 11563
Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208
sales@signaltransformer.com | techhelp@signaltransformer.com

belfuse.com/signal

SLPPI2025 SERIES ELECTRICAL SPECIFICATIONS

Electrical specifications for all part numbers measured at 20°C unless otherwise stated.

Part Number	Inductance L (μH)	Inductance Tolerance (± %)	DCR (mΩ)		I sat (A)	I rms (A)
			Typ	Max	Max	Max
SLPPI2520-10-R22M	0.22	20	15.0	17.0	7.0	5.5
SLPPI2520-10-R33M	0.33	20	16.5	20.0	5.8	4.8
SLPPI2520-10-R47M	0.47	20	23.0	29.0	5.0	3.6
SLPPI2520-10-R68M	0.68	20	36.0	44.0	4.1	3.1
SLPPI2520-10-1R0M	1.00	20	44.0	53.0	3.6	3.0
SLPPI2520-10-1R5M	1.50	20	61.0	70.0	2.5	2.4
SLPPI2520-10-2R2M	2.20	20	90.0	105	2.2	1.8
SLPPI2520-12-R22M	0.22	20	11.0	13.0	7.0	8.0
SLPPI2520-12-R33M	0.33	20	15.0	16.5	5.8	5.2
SLPPI2520-12-R47M	0.47	20	20.0	25.0	5.0	4.2
SLPPI2520-12-R68M	0.68	20	30.0	34.0	4.0	3.5
SLPPI2520-12-1R0M	1.00	20	38.0	45.0	3.9	3.2
SLPPI2520-12-1R5M	1.50	20	53.0	60.0	2.6	2.6
SLPPI2520-12-2R2M	2.20	20	78.0	90.0	2.3	2.0

Notes:

1. Test Condition: 1 MHz, 1.0 Vrms.
2. I sat (Max): DC current (A) that will cause L0 to drop 30% max.
3. I rms (Max): DC current (A) that will cause an ΔT of 40°C max.
4. Operating temperature range includes self-temperature rise.
5. The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Test equipment:

- **L:** Agilent E4980 Precision LCR Meter (Upgraded version of Agilent HP4284A) with HP42841A Current Source
- **DCR:** Milli-ohm meter


Custom versions available upon request.



128 Atlantic Avenue, Lynbrook, NY 11563
 Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208
 sales@signaltransformer.com | techhelp@signaltransformer.com

belfuse.com/signal

SLPPI2520 SERIES - TYPICAL PERFORMANCE CURVES

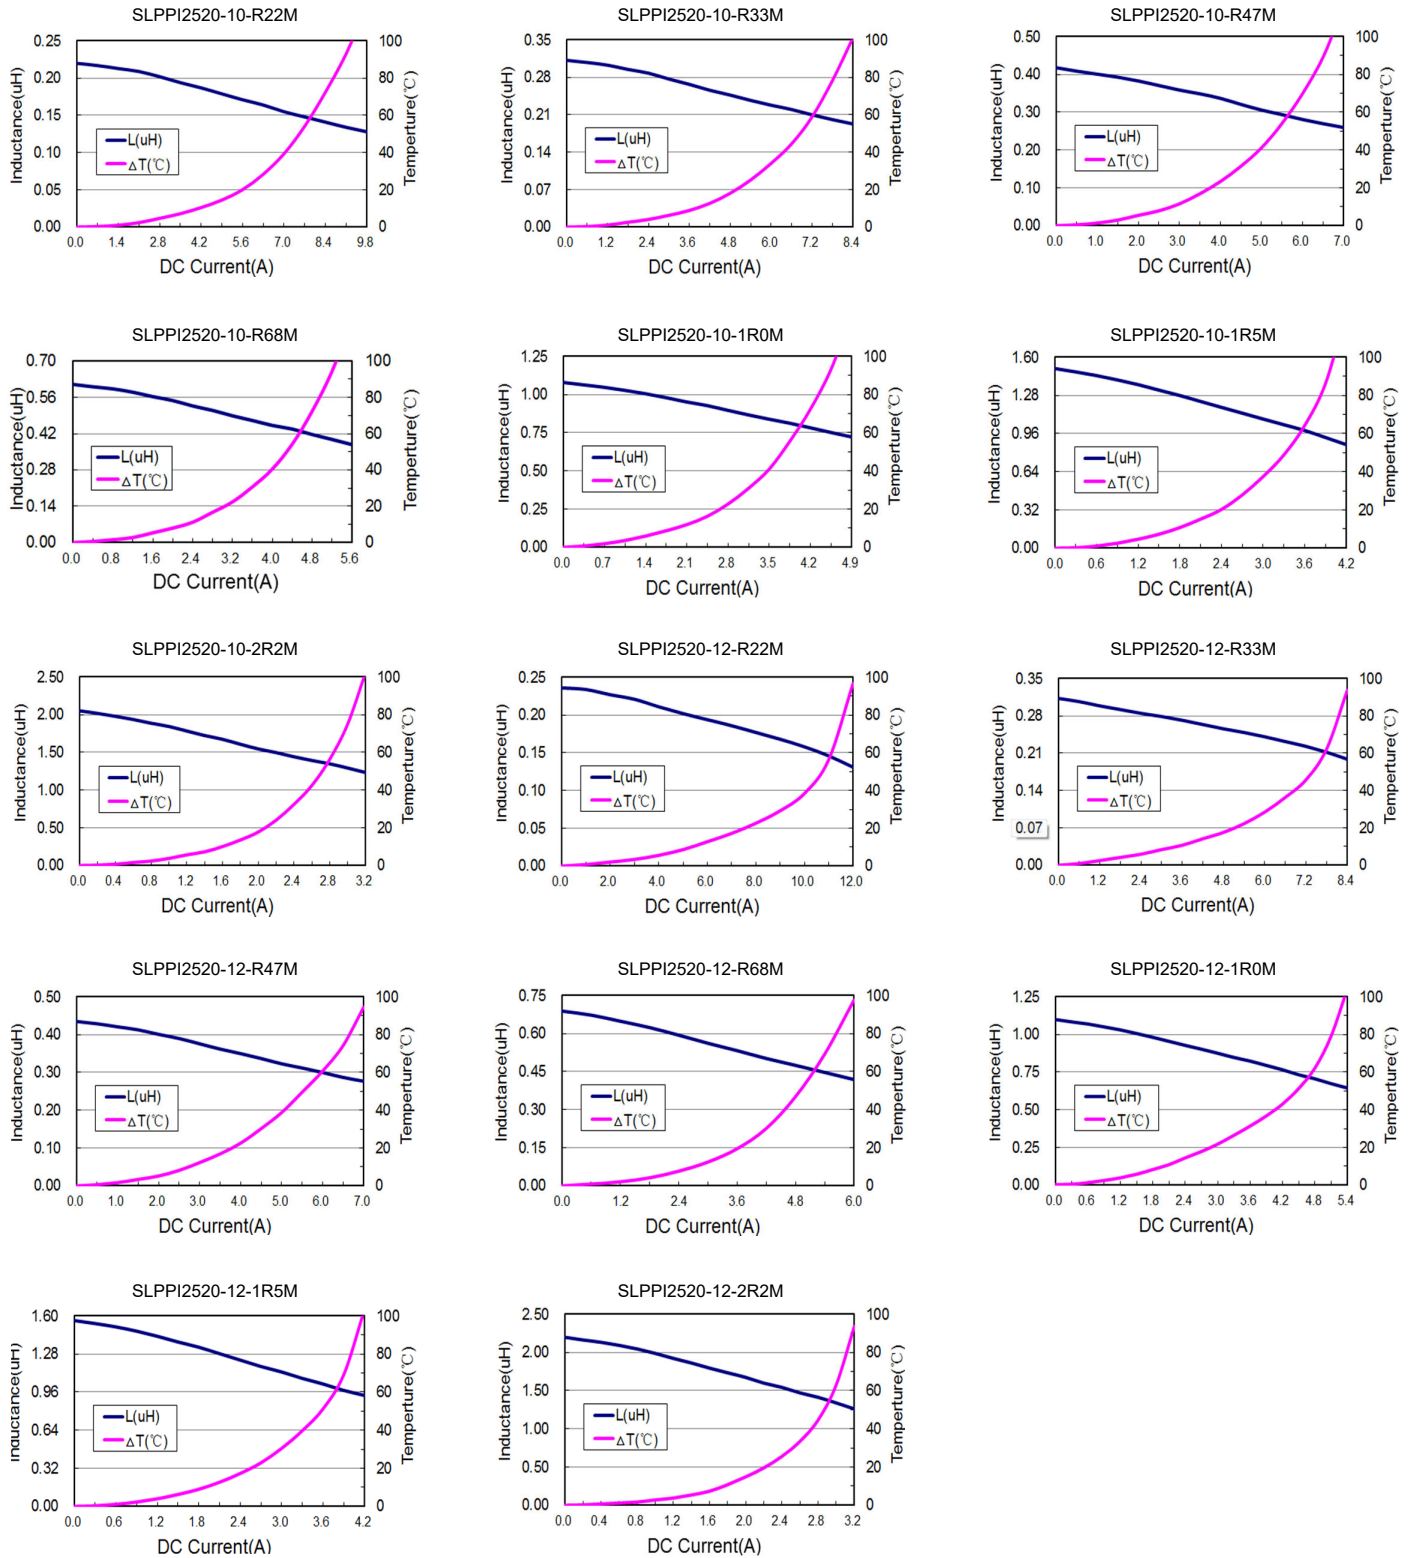


Custom versions available upon request.



128 Atlantic Avenue, Lynbrook, NY 11563
 Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208
 sales@signaltransformer.com | techhelp@signaltransformer.com

belfuse.com/signal


TAPE AND REEL SPECIFICATIONS

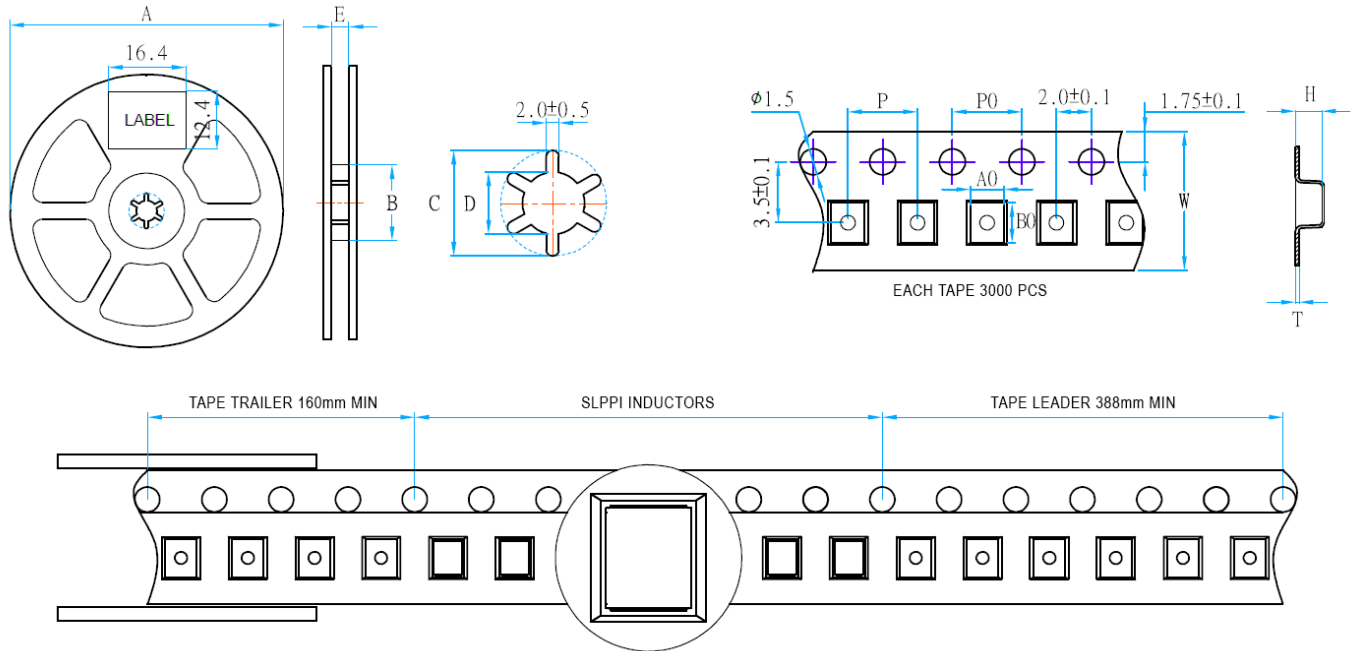

Series	Reel dimensions (mm)					Tape dimensions (mm)							Reel (pcs)
	A	B	C	D	E	W	P	P0	H	T	A0	B0	
SLPPI2016-10	183±3	50±0.5	20±1	13±1	9.7±0.5	8±0.1	4±0.1	4±0.1	1.15±0.05	0.25±0.03	1.9±0.1	2.30±0.1	3000
SLPPI2016-12	183±3	50±0.5	20±1	13±1	9.7±0.5	8±0.1	4±0.1	4±0.1	1.35±0.05	0.25±0.03	1.9±0.1	2.30±0.1	3000
SLPPI2520-10	183±3	50±0.5	20±1	13±1	9.7±0.5	8±0.1	4±0.1	4±0.1	1.15±0.05	0.25±0.03	2.4±0.1	2.85±0.1	3000
SLPPI2520-12	183±3	50±0.5	20±1	13±1	9.7±0.5	8±0.1	4±0.1	4±0.1	1.35±0.05	0.25±0.03	2.4±0.1	2.85±0.1	3000

Peel force of top cover tape

- The peel speed shall be about 300 mm/minute
- The peel force of top cover tape shall be between 10 g to 120 g.
- The cover bond should not be damaged and bond the tape when it peeled off.

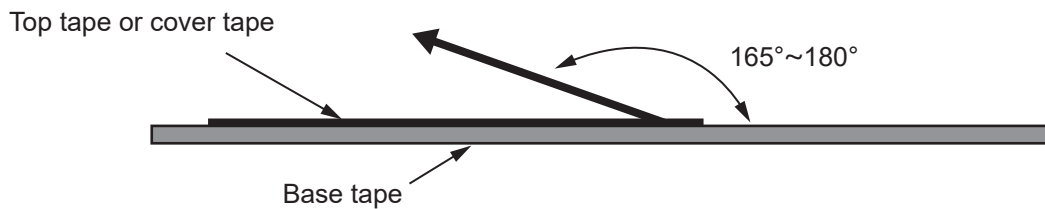

Note: Do not place the product in humid environment and keep it under seal with desiccant if it is not used up all a once.

Custom versions available upon request.




128 Atlantic Avenue, Lynbrook, NY 11563
 Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208
 sales@signaltransformer.com | techhelp@signaltransformer.com

belfuse.com/signal



About Signal Transformer

Signal Transformer is known as the world's leader of wire wound magnetic solutions since 1959. With over 50 years of experience manufacturing transformers, chokes, inductors and custom or modified standard products. Signal offers not only the most comprehensive line of certified standard power conversion products, with our vast engineering, manufacturing and regulatory resources; Signal Transformer excels in the design and manufacturer of cost effective, specialized platforms.

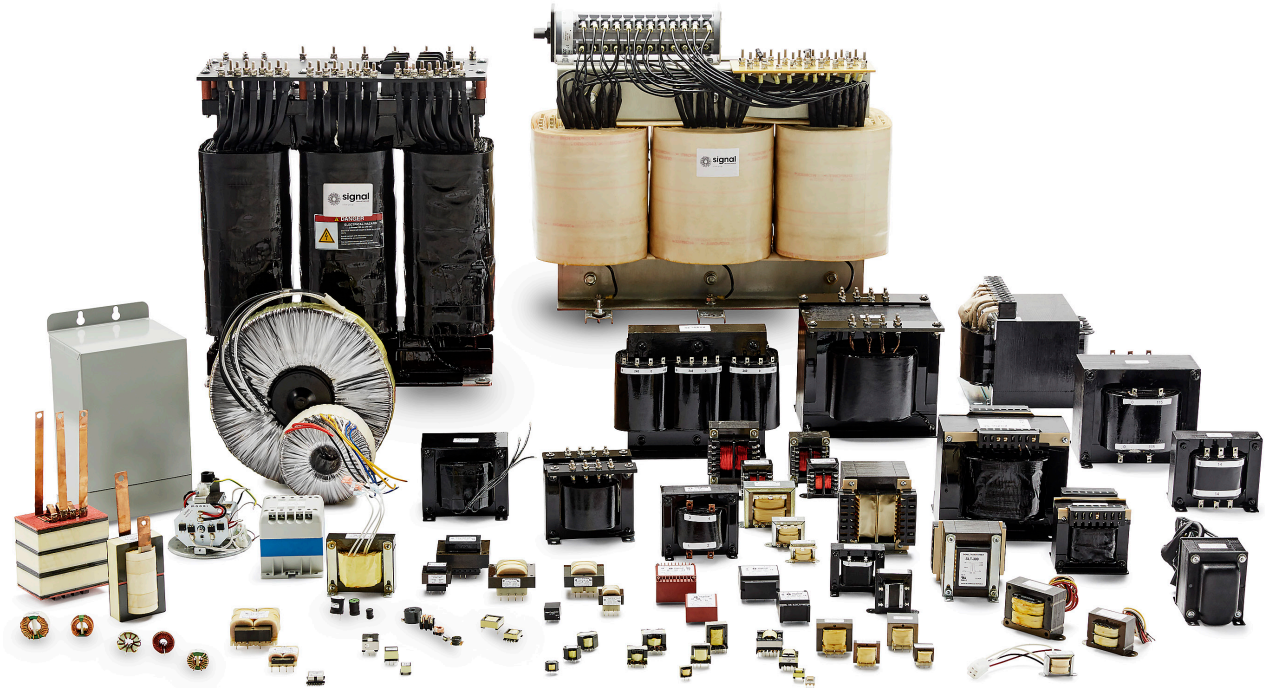

**For more information,
please contact us:**

128 Atlantic Avenue
Lynbrook, NY 11563

Toll Free +1 866-239-5777

Tel +1 516-239-5777

Fax +1 516-239-7208

sales@signaltransformer.com
techhelp@signaltransformer.com

belfuse.com/signal



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bel:](#)

[SLPPI2016-10-1R0M](#) [SLPPI2016-10-1R0M-TR](#) [SLPPI2016-10-1R5M](#) [SLPPI2016-10-1R5M-TR](#) [SLPPI2016-10-2R2M](#) [SLPPI2016-10-2R2M-TR](#) [SLPPI2016-10-R24M](#) [SLPPI2016-10-R24M-TR](#) [SLPPI2016-10-R33M](#) [SLPPI2016-10-R33M-TR](#) [SLPPI2016-10-R47M](#) [SLPPI2016-10-R47M-TR](#) [SLPPI2016-10-R68M](#) [SLPPI2016-10-R68M-TR](#) [SLPPI2016-12-1R0M](#) [SLPPI2016-12-1R0M-TR](#) [SLPPI2016-12-1R5M](#) [SLPPI2016-12-1R5M-TR](#) [SLPPI2016-12-2R2M](#) [SLPPI2016-12-2R2M-TR](#) [SLPPI2016-12-R22M](#) [SLPPI2016-12-R22M-TR](#) [SLPPI2016-12-R33M](#) [SLPPI2016-12-R33M-TR](#) [SLPPI2016-12-R47M](#) [SLPPI2016-12-R47M-TR](#) [SLPPI2016-12-R68M](#) [SLPPI2016-12-R68M-TR](#) [SLPPI2520-10-1R0M](#) [SLPPI2520-10-1R0M-TR](#) [SLPPI2520-10-1R5M](#) [SLPPI2520-10-1R5M-TR](#) [SLPPI2520-10-2R2M](#) [SLPPI2520-10-2R2M-TR](#) [SLPPI2520-10-R22M](#) [SLPPI2520-10-R22M-TR](#) [SLPPI2520-10-R33M](#) [SLPPI2520-10-R33M-TR](#) [SLPPI2520-10-R47M](#) [SLPPI2520-10-R47M-TR](#) [SLPPI2520-10-R68M](#) [SLPPI2520-10-R68M-TR](#) [SLPPI2520-12-1R0M](#) [SLPPI2520-12-1R0M-TR](#) [SLPPI2520-12-1R5M](#) [SLPPI2520-12-1R5M-TR](#) [SLPPI2520-12-2R2M](#) [SLPPI2520-12-2R2M-TR](#) [SLPPI2520-12-R22M](#) [SLPPI2520-12-R22M-TR](#) [SLPPI2520-12-R33M](#) [SLPPI2520-12-R33M-TR](#) [SLPPI2520-12-R47M](#) [SLPPI2520-12-R47M-TR](#) [SLPPI2520-12-R68M](#) [SLPPI2520-12-R68M-TR](#)