




DELTA P/N : HCBS9610F Series

Mechanical Dimensions

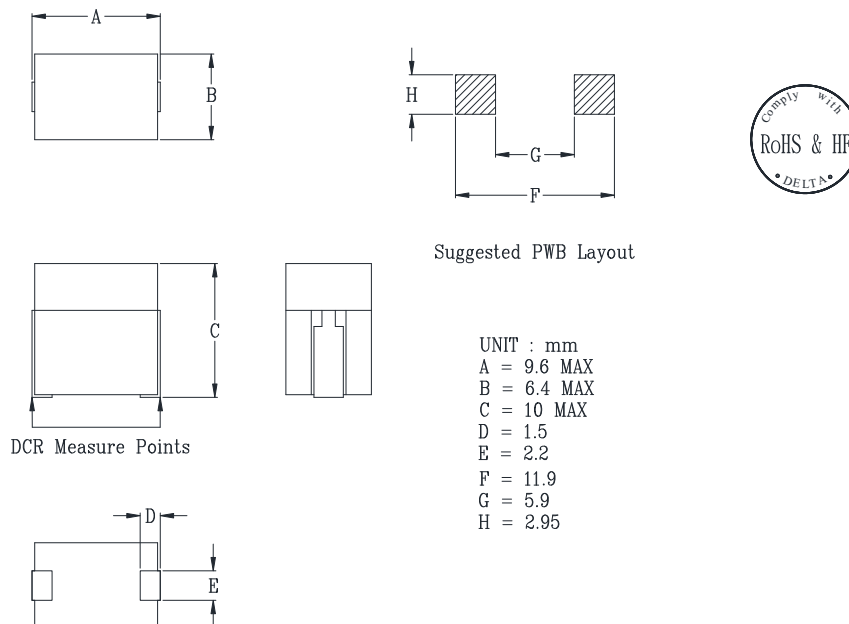

Electrical Characteristics @ 25°C, 100kHz, 1V

Delta P/N	L ¹ (nH)	Li (nH) MIN	DCR (mΩ) ± 10%	Isat ² (A)			Ir ³ (A)
				25°C	100°C	125°C	
HCBS9610F-700	70	50.4	0.145	124	115	108	78
HCBS9610F-101	100	72.0		95	82	76	
HCBS9610F-121	120	86.4		78	67	62	
HCBS9610F-151	150	108		60	52	48	
HCBS9610F-221	220	158.4		38	34	30	

1. Tolerance of inductance: ± 15% for 70nH, ± 10% for other parts.
2. Isat is the DC current which causes the inductance drop to Li.
3. Ir is the DC current which causes the surface temperature of the part increase approximately 40 °C.
4. Operating temperature: -40°C to 125°C (Self-temperature rise included).

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cyntec:](#)

[HCBS9610F-221](#) [HCBS9610F-700](#) [HCBS9610F-121](#) [HCBS9610F-151](#)