
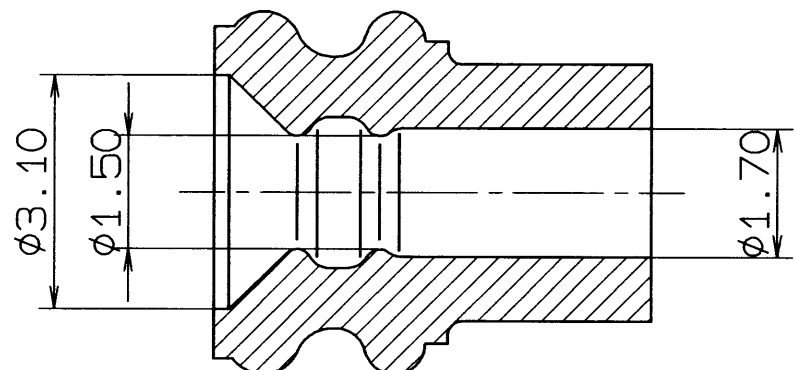


B

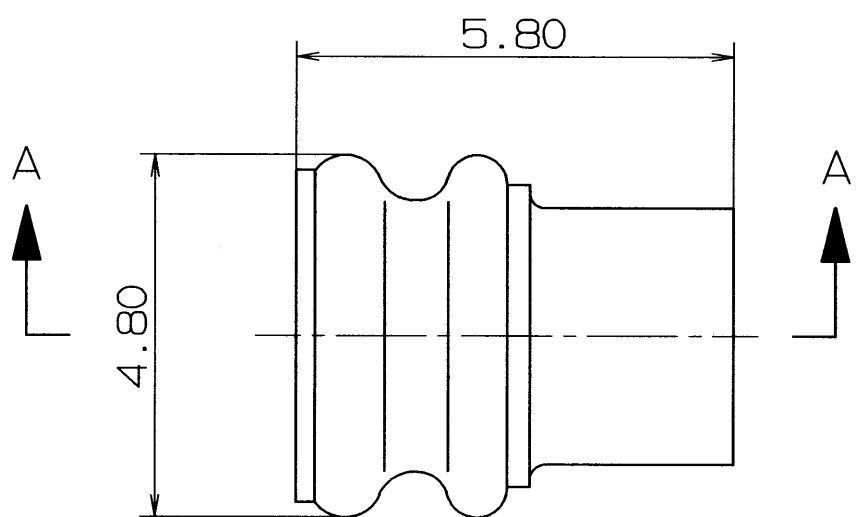

SEC. A-A

RUBBER PART GENERAL TOLERANCE			
PART DIM.	1	2	③
0 TO 3	± 0.2	± 0.3	± 0.4
3 TO 6	± 0.2	± 0.4	± 0.5
6 TO 10	± 0.3	± 0.5	± 0.6
10 TO 18	± 0.3	± 0.6	± 0.8
18 TO 30	± 0.4	± 0.8	± 1.0
30 TO 50	± 0.5	± 1.0	± 1.5
50 TO 80	± 0.6	± 1.2	± 2.0
80 TO 120	± 0.7	± 1.4	± 2.5
120 TO 180	± 0.8	± 1.6	± 3.0
180 TO 250	± 1.0	± 2.0	± 4.0
250 TO 315	± 1.2	± 2.5	± 5.0
315 TO 400	± 1.5	± 3.0	± 6.0
400 TO 500	± 1.8	± 3.5	± 7.0
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %

B

注記

1.材料: NBR

色: 青

NOTE

1.MATERIAL : NBR

COLOR : BLUE

ISSUE MARK

A

A

								CUSTOMER				MATL. SPEC.				TREAT. & FIN.			
								CUSTOMER PART NO.				CUSTOMER DWG NO.				SEE NOTE			
																NAME 090 RUBBER STOPPER			
								OFFICE				TRIAL PART NO.				-----			
								VENDOR				-----				(USE FOR 4.40 DIA CAVITY)			
								VENDOR NO.				-----							
GENERAL TOLERANCE								DWG TYPE		DWG SOURCE		DWG DATE		UNIT		SCL		ANGLE	
								R		NEW		96.10.14		mm		10/1		3	
								APPROVED		CHECKED		CHECKED		DESIGN		DRAWN		PART NO. 7157-3649	
														TSUJI		TAKAOKA		CH.CODE	
																		DWG NO. 7157-3649: R	
SPECIFIED RUBBER PART GENERAL TOLERANCE 3								MASS										YAZAKI CORPORATION	