



CST

TE Internal #: 1375820-2

Housing, Receptacle, Wire-to-Wire, 2 Position, 2.54 mm [.1 in]

Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable,

Power & Signal

[View on TE.com >](#)

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

Receptacle Housing: 2.54mm, 1 Row, CST-100 II



Connector Product Type: **Housing**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Wire**

Number of Positions: **2**

Centerline (Pitch): **2.54 mm [.1 in]**

[All Receptacle Housing: 2.54mm, 1 Row, CST-100 II \(24\)](#)

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	2
Number of Rows	1

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Body Features

--	--



Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Retention Within Housing	Without
Contact Layout	Inline
Contact Type	Socket
Contact Current Rating (Max)	7 A

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Strain Relief	Without
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Latch
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Nylon - GF
Centerline (Pitch)	2.54 mm[.1 in]

Dimensions

Connector Length	5.59 mm[.22 in]
Connector Height	6.6 mm[.26 in]
Wire Size	.13 – .33 mm²

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
Compatible With Agency/Standards Products	CSA, UL
UL Flammability Rating	UL 94V-0

Packaging Features



Packaging Quantity	1
Packaging Method	Package

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability





Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # CAT-104MTA-PRUMH PCB Header: Polyester, Right Angle, 2.54 mm	 TE Part # CAT-104MTA-PVBRH Polyester Vertical PCB Header: 2.54 mm, Breakaway, MTA 100	 TE Part # CAT-104MTA-PRUSH PCB Header: Polyester, Right Angle, Unshrouded	 TE Part # CAT-104MTA-PVUNH PCB Header: Polyester, Vertical, Unshrouded, No Mating Alignment
---	--	--	--

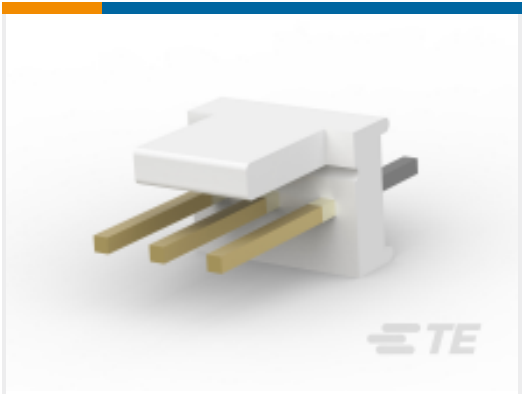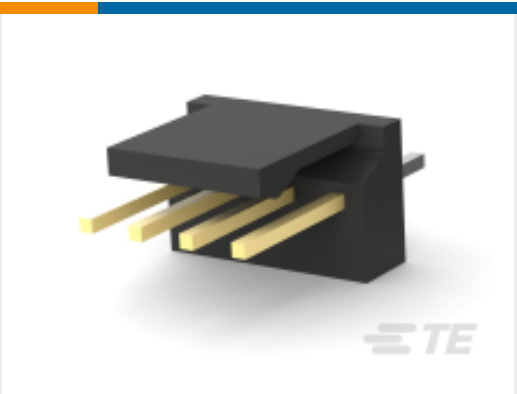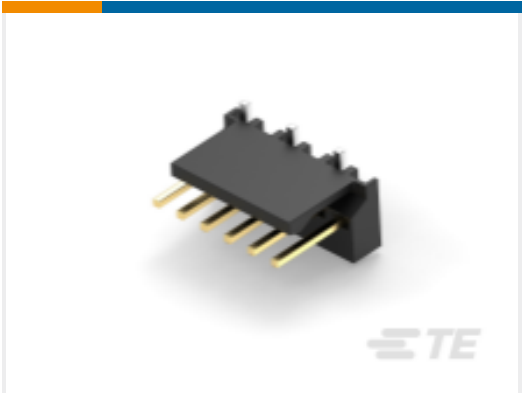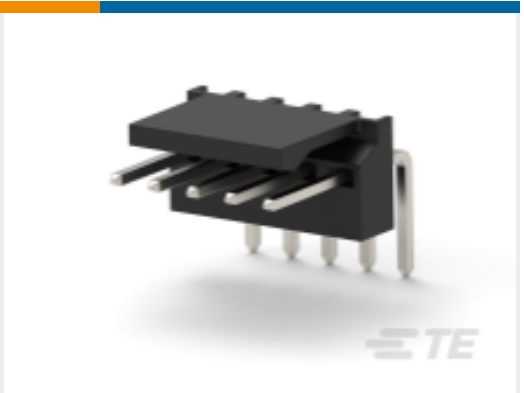

 TE Part # CAT-104MTA-PVUMH PCB Header: Polyester, Vertical, 2.54 mm	 TE Part # 640550-2 02P MTA100 COVER	 TE Part # CAT-104MTA-NYLCC Nylon PCB Connector Covers: 2.54 mm, MTA 100	 TE Part # CAT-104MTA-NVTHH Nylong Vertical PCB Header: 2.54mm, Through Hole, MTA 100
 TE Part # CAT-104MTA-NVSMH PCB Header: Nylon, Vertical, Surface Mount, MTA 100	 TE Part # 3-644694-2 02P MTA100 R/A HDR RETENTIVE	 TE Part # CAT-104MTA-NRTHH PCB Header: Nylon, Right Angle, 2.54 mm	 TE Part # 3-644894-2 02P CST100 SHRD HDR ASSY LF
 TE Part # 3-644898-2 02P CST100 SHRD HDR ASSY LF	 TE Part # 3-644893-2 02P CST100 SHRD HDR ASSY LF		

Customers Also Bought

 TE Part #1375820-8 Receptacle Housing: 2.54mm, 1 Row, CST-100 II	 TE Part #1445336-2 LOOSE PC CONTACT 15 AU PLATED	 TE Part #1445336-3 LOOSE PC CONTACT 30 AU PLATED	 TE Part #1-34243-1 PG BUTT SPLC 22-16COMM22-18MIL
 TE Part #1375819-3 CST-100 II CONTACT 30 GOLD PLT	 TE Part #1586853-1 09P UMNL CAP HSG, GW	 TE Part #F471003001 VG-95218-T028-C013CK3100	

Documents



CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1375820-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1375820-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1375820-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

CSA Certificate

English