




Switches > Tactile Switches

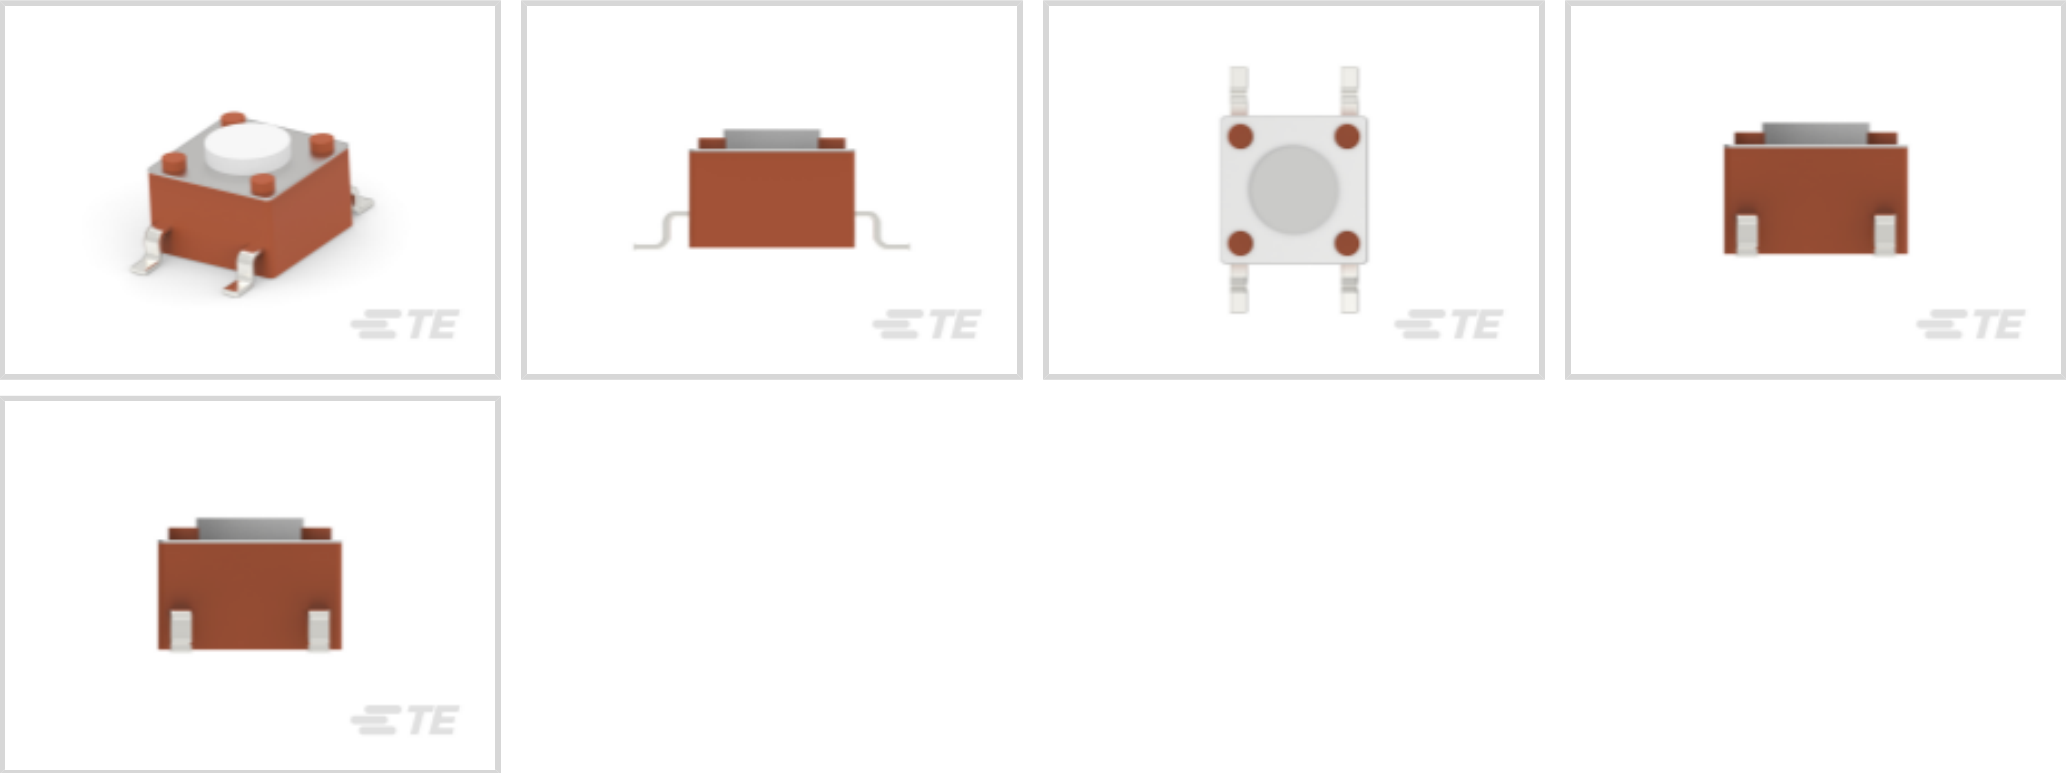

Actuator Style: Round

Operating Function: NO

Contact Base Material: Copper Alloy

Switch Contact Plating Material: Silver

Low Profile: With

Features

Product Type Features

Switch Connection Type	Printed Circuit Board
Leg Style	Gull Wing
Illuminated	Without
Actuator Style	Round

Configuration Features

ESD Grounding Terminal	Without
Ganged	With
Switch Feedback Type	Tactile
Operating Function	NO
Support Bracket	Without
Configuration (Pole-Throw)	Single Pole - Single Throw
Number of Actuators	Single

Electrical Characteristics

Operating Voltage	24 VDC
-------------------	--------



Body Features

Cover Material	Steel
Actuator Force	260 g[9.17 oz]
Case Material	Polyamide
Actuator Profile	Extended
Actuator Material	Nylon
Case Color	Brown
Product Orientation	Vertical
Actuator Color	White

Contact Features

Contact Base Material	Copper Alloy
Switch Contact Plating Material	Silver
Contact Current Rating	50 mA

Termination Features

Termination Method to PCB	Surface Mount
---------------------------	---------------

Housing Features

Low Profile	With
Process Sealed	No

Dimensions

Actuator Length	.7 mm[.028 in]
Button Width	3.5 mm[.138 in]
Product Height	4.3 mm[.169 in]

Usage Conditions

Operating Temperature Range	-40 – 85 °C
-----------------------------	-------------

Packaging Features

Packaging Method	Loose Piece
------------------	-------------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2024 (241)
Candidate List Declared Against: JUNE 2024 (241)
Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1825910-6
FSM4JH=6MM TACT SWITCH, HIGH TEMP




TE Part # 2-1825910-7
FSM14JH=6MM TACT SWITCH, HIGH TEMP



TE Part # 4-1437565-2
FSM4JSMATR=TACT SWITCH 6X6MIL




TE Part # 3-1437565-0
FSM2JSMATR=ON T/R

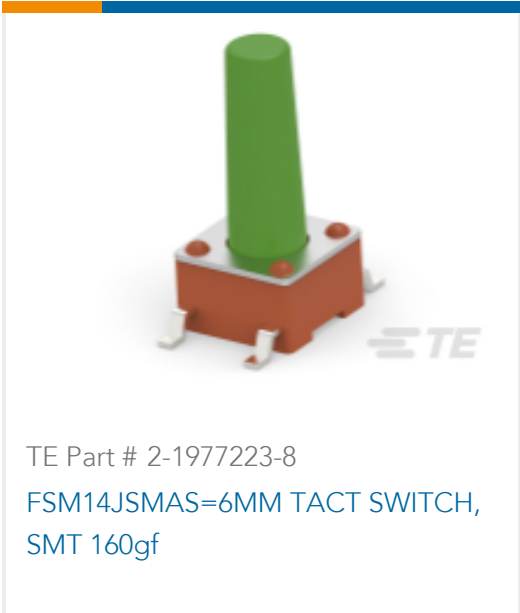

TE Part # 2-1977223-8
FSM14JSMAS=6MM TACT SWITCH, SMT 160gf

Also in the Series | [Alcoswitch FSMJSMA](#)

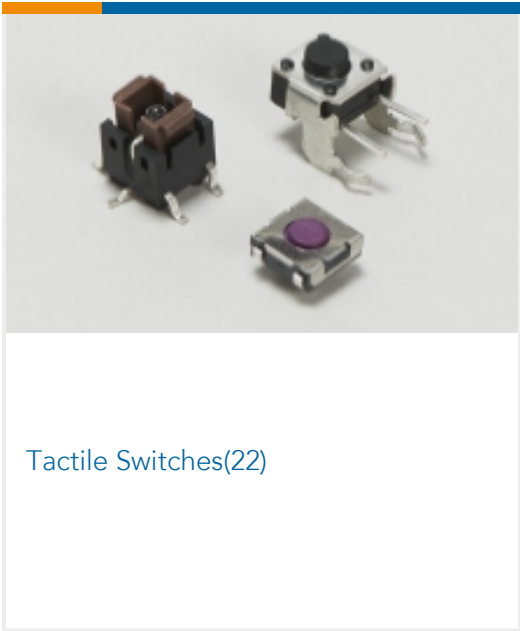

Customers Also Bought

TE Part #5-104746-2
22 SYS 50 HDR DRRA UNSHRD SN

TE Part #2-1879216-7
CPF 0402 95K3 0.1% 25PPM 1K RL

TE Part #1-1623774-4
C14 100R 5% (LOOSE)

TE Part #3-2176089-4
RP 1J 0.166W 24K9 0.1% 25PPM 1K RL

TE Part #2355172-3
3P,2MM,BRK HDR,SRVT,2.8,0.1AU,BOX

TE Part #2355172-4
4P,2MM,BRK HDR,SRVT,2.8,0.1AU,BOX

TE Part #4-2176328-4
CRGP 1206 39K 1%

TE Part #MAF94271
Dipol,WTS,SMAM 802.11abg,2-3dBi

Documents

Product Drawings
FSM2JSMAA=TACTILE 260G FORCE S
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_2-1437565-8_V1.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_2-1437565-8_V1.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_2-1437565-8_V1.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Datasheets & Catalog Pages
SWITCHES_CORE_PROGRAM_CATALOG

English
Products for Mobile Equipment
English