




TE Internal #: 292304-1

B, 2.0, Standard Profile, Receptacle, 1 Port, Top, Right Angle, Box & Tray / Tray, Flush, Through Hole - Solder, Cable-to-Board, 1500, USB Connectors

[View on TE.com >](#)

Connectors > Audio & Video Connectors > USB Connectors

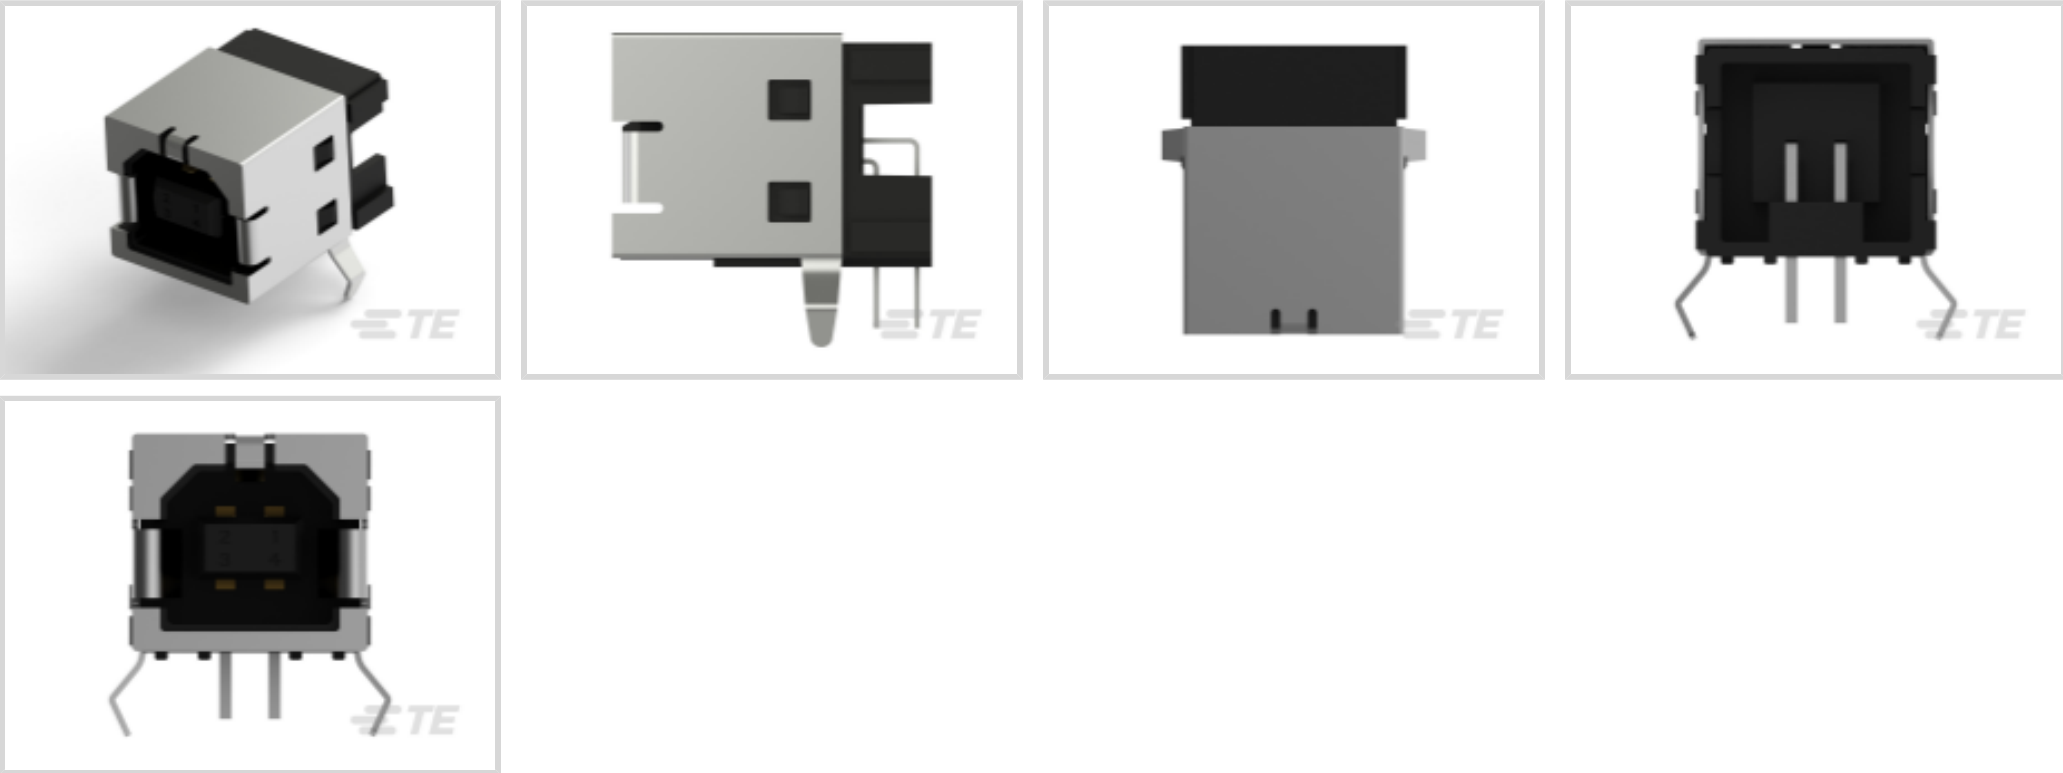

USB Adapter Type: B

USB Version: 2.0

Connector Profile: Standard

Connector & Housing Type: Receptacle

Number of Ports: 1

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Integral Locking Latch            | Without               |
| USB Adapter Type                  | B                     |
| USB Version                       | 2.0                   |
| Connector & Housing Type          | Receptacle            |
| Connector System                  | Cable-to-Board        |
| Connector & Contact Terminates To | Printed Circuit Board |
| USB Connector Type                | USB 2.0 Type-B        |

Configuration Features

|                     |   |
|---------------------|---|
| Number of Ports     | 1 |
| Number of Positions | 4 |

Body Features

|                        |        |
|------------------------|--------|
| Offset                 | 0 mm   |
| Shell Plating Finish   | Bright |
| Shell Plating Material | Tin    |



|                                                |                                          |
|------------------------------------------------|------------------------------------------|
| Connector Profile                              | Standard                                 |
| Contact Features                               |                                          |
| Contact Mating Area Plating Material Thickness | .76 µm[29.92 µin]                        |
| Contact Mating Area Plating Material           | Gold or Gold Flash over Palladium Nickel |
| Contact Current Rating (Max)                   | 1 A                                      |
| Termination Features                           |                                          |
| Termination Post & Tail Length                 | 3.01 mm[.119 in]                         |
| Termination Method to PCB                      | Through Hole - Solder                    |
| Mechanical Attachment                          |                                          |
| Locking Feature                                | With                                     |
| PCB Mount Location                             | Top                                      |
| PCB Connector Seating                          | Flush                                    |
| PCB Mount Retention Type                       | Kinked Legs                              |
| Connector Mounting Type                        | Board Mount                              |
| Housing Features                               |                                          |
| Housing Material                               | Thermoplastic                            |
| Housing Color                                  | Black                                    |
| Body Orientation                               | Right Angle                              |
| Centerline (Pitch)                             | 2.5 mm[.098 in]                          |
| Dimensions                                     |                                          |
| PCB Thickness (Recommended)                    | 1.57 mm[.062 in]                         |
| Usage Conditions                               |                                          |
| Soldering Temperature (Max)                    | 260 °C[500 °F]                           |
| Mating Cycles (Max)                            | 1500                                     |
| Operating Temperature Range                    | -55 – 85 °C[-67 – 185 °F]                |
| Operation/Application                          |                                          |
| Halogen Free                                   | No                                       |
| Circuit Application                            | Signal                                   |
| Industry Standards                             |                                          |
| Test Identification (TID)                      | 60001134                                 |
| Moisture Sensitivity Level                     | 1                                        |
| Industry Standard                              | USB 2.0                                  |



|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                    |                  |
|--------------------|------------------|
| Packaging Quantity | 100              |
| Packaging Method   | Box & Tray, Tray |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                  |
| Solder Process Capability                     | Wave solder capable to 265°C                                                                                                    |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought

TE Part #7-2176087-6  
RP 1J 0.166W 422R 0.1% 25PPM 1K RL

TE Part #176153-2  
EIS POST HDR ASSY H 2P GOLD

TE Part #1735251-3  
SKT,SODIMM,144P,1.5/1.35V(DDR3), STD,TY-S

TE Part #3-2176158-8  
TLM 2512 1.0W R10 1% 50PPM 4K RL





TE Part #1-1761185-1  
4 SDL SE GRND RCPT ASSY

TE Part #2-2176608-2  
RLC73PD 3A 1R0 1% 1K RL

TE Part #6-2176573-1  
RLC73PW 2A R28 1% 5K RL

TE Part #2246023-1  
Flex. Antenna Assembly

Documents

Product Drawings

STD USB TYPE B, R/A, T/H

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_292304-1\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_292304-1\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_292304-1\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

USB and Mini USB Datasheet 7-1773442-0

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English