




Relays & Contactors > Electromechanical Relays

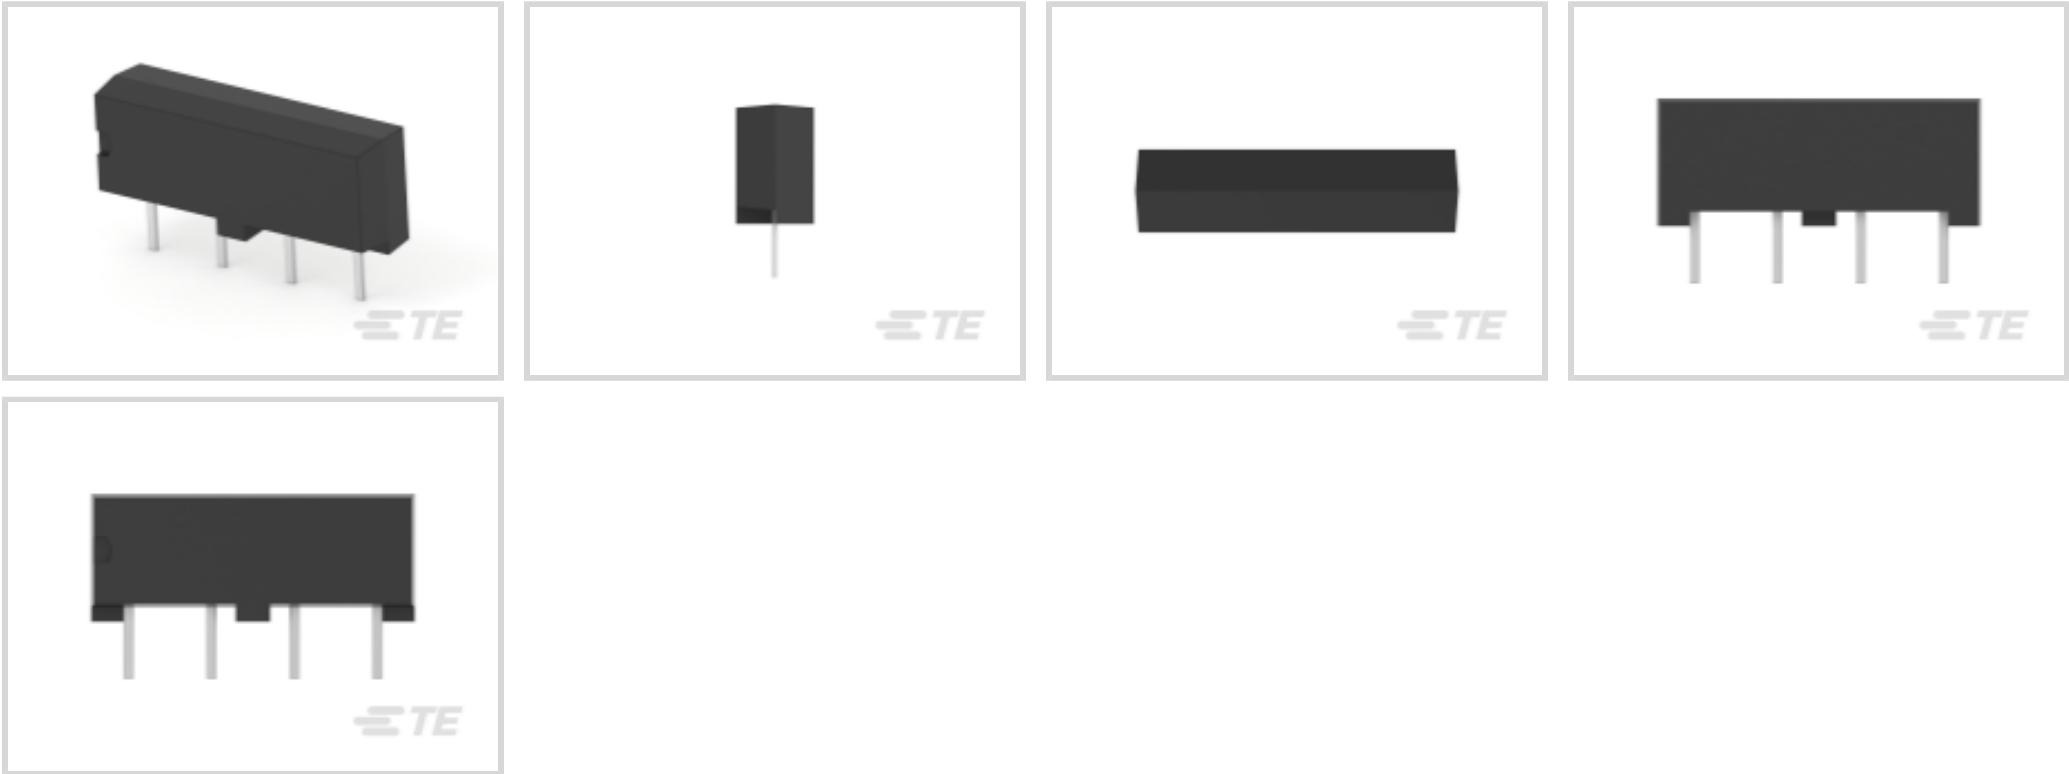

Relay & Contactor Type: **Reed Relay**  
Coil Magnetic System: **Monostable**  
Contact Arrangement: **2 Form C DPDT-CO**  
Current Type: **DC**  
Contact Current Rating: **.2 A**

Features

Product Type Features

Relay & Contactor Type	Reed Relay
------------------------	------------

Configuration Features

Contact Special Features	Reed Contacts
Contact Number of Poles	1
Contact Arrangement	2 Form C DPDT-CO

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	250 Vrms
Contact Limiting Making Current	.4 A
Contact Limiting Short-Time Current	.4 A
Contact Limiting Continuous Current	1 A
Contact Switching Voltage (Max)	200 VDC
Contact Switching Load (Min)	10mA @ .01V
Insulation Initial Resistance	1000 MΩ
Contact Limiting Breaking Current	.4 A



Coil Resistance	500 Ω
Contact Current Rating	.2 A
Coil Voltage Rating	5 VDC
Contact Voltage Rating	24 VDC
Coil Power Rating DC	1.026 W
Insulation Initial Dielectric Between Contacts & Coil	1500 Vrms

Body Features

Product Weight	1.6 g[.0564 oz]
Enclosure Type	Flux Proof Automatic Soldering & Washable

Contact Features

Contact Material	Gold F
Contact Plating Material	Ruthenium

Termination Features

Main Termination & Connection Type	Solder Pins
Coil Termination & Connection Type	Solder Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Product Width	5.08 mm[.2 in]
Product Length	19.8 mm[.779 in]
Product Height	7.8 mm[.307 in]

Usage Conditions

Environmental Category of Protection	RTIII
Operating Temperature Range	-40 – 85 °C
Environmental Ambient Temperature (Max)	85 °C[85 °F]

Operation/Application

Performance Type	Standard
Solder Process	Wave Solder
Coil Magnetic System	Monostable
Current Type	DC

Packaging Features

Packaging Method	Box & Tube, Tube
------------------	------------------



Other

Environmental Ambient Temperature Class	70 – 85 °C
Coil Power Rating Class	0 – .1 W
Contact Current Class	0 – 2 A
Height Class (Mechanical)	7 – 8 mm
Length Class (Mechanical)	16 – 20 mm
Width Class (Mechanical)	0 – 6 mm

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



Also in the Series | Axicom Reed Relay V23100 -V4



Customers Also Bought

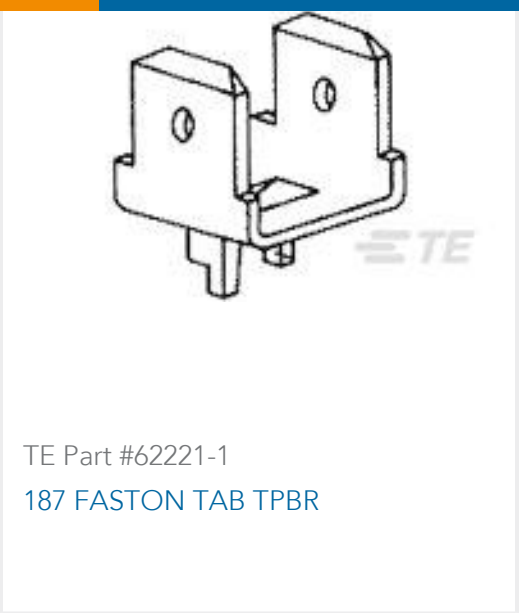

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_4-1393763-4\_B.2d\_dxf.zip

English



Customer View Model

[ENG\\_CVM\\_CVM\\_4-1393763-4\\_B.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_4-1393763-4\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Reed Relay V23100-V4](#)

English

Product Specifications

[Product Specification](#)

English

[Definitions General Purpose Relays](#)

English