## **FERROXCUBE**

## DATA SHEET

# **EP17** EP cores and accessories

Supersedes data of September 2004

2008 Sep 01




EP17

#### **CORE SETS**

## **Effective core parameters**

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(I/A)$	core factor (C1)	0.870	mm <sup>-1</sup>
V <sub>e</sub>	effective volume	999	mm <sup>3</sup>
l <sub>e</sub>	effective length	29.5	mm
A <sub>e</sub>	effective area	33.7	mm <sup>2</sup>
A <sub>min</sub>	minimum area	25.5	mm <sup>2</sup>
m	mass of set ≈ 12		g

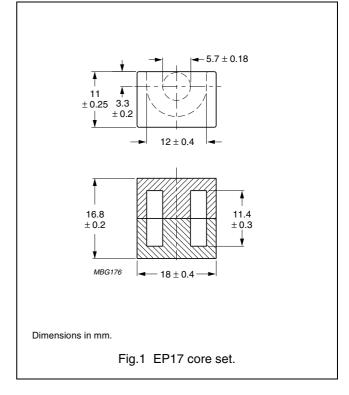

## Core sets for general purpose transformers and power applications

Clamping force for  $A_L$  measurements, 40  $\pm 10\ N.$ 

GRADE	A <sub>L</sub> (nH)	μ <sub>e</sub>	TOTAL AIR GAP (μm)	TYPE NUMBER
3C81	63 ±3%	≈ 44	≈ 1020	EP17-3C81-E63
	100 ±3%	≈ 70	≈ 560	EP17-3C81-A100
	160 ±3%	≈ 111	≈ 310	EP17-3C81-A160
	250 ±3%	≈ 174	≈ 180	EP17-3C81-A250
	315 ±5%	≈ 219	≈ 135	EP17-3C81-A315
	2670 ±25%	≈ 1860	≈ 0	EP17-3C81
3C91 des	2670 ±25%	≈ 1860	≈ 0	EP17-3C91
3C94	63 ±3%	≈ 44	≈ 1020	EP17-3C94-E63
	100 ±3%	≈ 70	≈ 560	EP17-3C94-A100
	160 ±3%	≈ 111	≈ 310	EP17-3C94-A160
	250 ±3%	≈ 174	≈ 180	EP17-3C94-A250
	315 ±5%	≈ 219	≈ 135	EP17-3C94-A315
	2500 ±25%	≈ 1740	≈ 0	EP17-3C94
3C96 des	2200 ±25%	≈ 1530	≈ 0	EP17-3C96

EP17

GRADE	A <sub>L</sub> (nH)	$\mu_{e}$	TOTAL AIR GAP (μm)	TYPE NUMBER
3F3	63 ±3%	≈ 44	≈ 1020	EP17-3F3-E63
	100 ±3%	≈ 70	≈ 560	EP17-3F3-A100
	160 ±3%	≈ 111	≈ 310	EP17-3F3-A160
	250 ±3%	≈ 174	≈ 180	EP17-3F3-A250
	315 ±5%	≈ 219	≈ 135	EP17-3F3-A315
	2200 ±25%	≈ 1530	≈ 0	EP17-3F3

## Core sets of high permeability grades

Clamping force for  $A_L$  measurements, 40  $\pm 10\ N.$ 

GRADE	A <sub>L</sub> (nH)	$\mu_{\mathbf{e}}$	AIR GAP (μm)	TYPE NUMBER
3E27	$7100 \pm 25\%$	≈ 4950	≈0	EP17-3E27

## Properties of core sets under power conditions

	B (mT) at	CORE LOSS (W) at			
GRADE	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 25 kHz; B = 200 mT; T = 100 °C	f = 100 kHz; B = 100 mT; T = 100 °C	f = 100 kHz; B = 200 mT; T = 100 °C	f = 400 kHz; B = 50 mT; T = 100 °C
3C81	≥315	≤ 0.23	_	_	_
3C91	≥315	-	≤ 0.06 <sup>(1)</sup>	≤ 0.36 <sup>(1)</sup>	-
3C94	≥320	_	≤ 0.08	≤ 0.45	-
3C96	≥340	-	≤ 0.06	≤ 0.36	≤ 0.15
3F3	≥315	_	≤ 0.15	_	≤ 0.2

## Properties of core sets under power conditions (continued)

	B (mT) at	CORE LOSS (W) at			
GRADE	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 500 kHz; B = 50 mT; T = 100 °C	f = 500 kHz; B = 100 mT; T = 100 °C	f = 1 MHz; B = 30 mT; T = 100 °C	f = 3 MHz; $\hat{B}$ = 10 mT; T = 100 °C
3C81	≥315	-	-	_	_
3C91	≥315	-	-	_	_
3C94	≥320	-	-	_	_
3C96	≥340	≤ 0.3	-	_	_
3F3	≥315	_	_	_	_

#### Note


1. Measured at 60 °C.

## EP17

## **COIL FORMER**

## General data

PARAMETER	SPECIFICATION
Coil former material	phenolformaldehyde (PF), glass-reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E41429 (M)
Pin material	copper clad steel, tin (Sn) plated
Maximum operating temperature	180 °C, "IEC 60085", class H
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B: 350 °C, 3.5 s
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1: 235 °C, 2 s

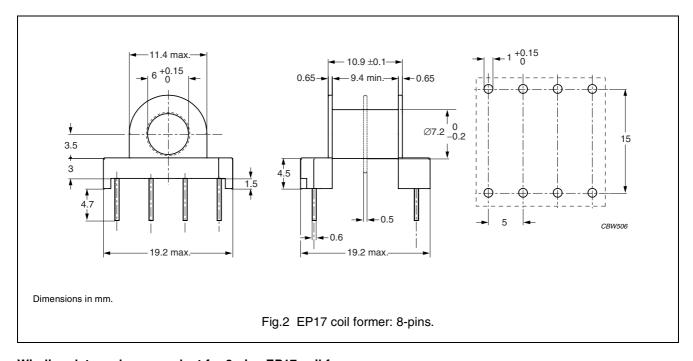

## Winding data and area product for 8-pins EP17 coil former


NUMBER OF SECTIONS	MINIMUM WINDING AREA (mm²)	NOMINAL WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	AREA PRODUCT Ae x Aw (mm <sup>4</sup> )	TYPE NUMBER
1	18.0	9.45	28.9	607	CSH-EP17-1S-8P
2	2 × 8.3	2 × 4.6	28.9	2 x 280	CSH-EP17-2S-8P


EP17

## **MOUNTING PARTS**

## General data

ITEM	REMARKS	FIGURE	TYPE NUMBER
Clasp	copper-tin alloy (CuSn), tin (Sn) plated	3	CLA-EP17
Spring	copper-tin alloy (CuSn), tin (Sn) plated	4	SPR-EP17

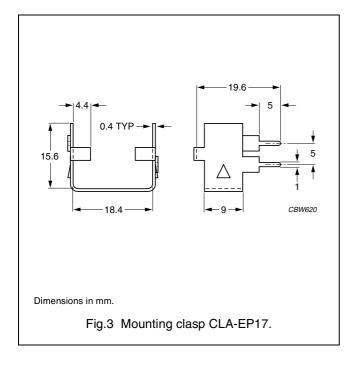

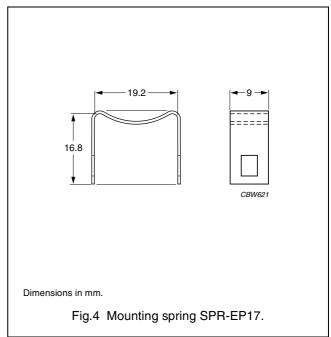

EP17

#### **DATA SHEET STATUS DEFINITIONS**

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

## **DISCLAIMER**

**Life support applications** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

#### **PRODUCT STATUS DEFINITIONS**

STATUS	INDICATION	DEFINITION
Prototype	prot	These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in	des	These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support	sup	These products are <b>not</b> recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.