



REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE & CANCEL	1/3/03
	BXA-12553/KIT & BXA-12553/INV	

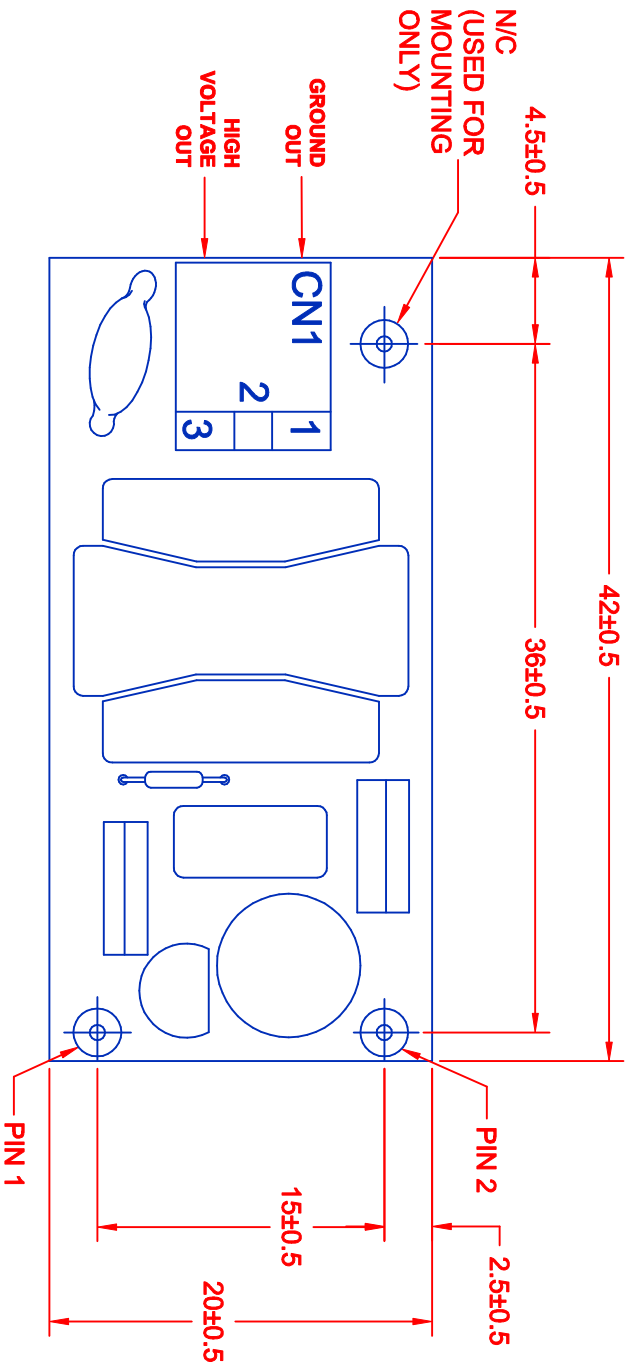

NOTE:
MATING CONNECTOR IS NOT INCLUDED WITH INVERTER.
JKL WIRE HARNESS PART NO. BXC-10566 CAN BE ORDERED SEPARATELY.

CN1 PIN #	TO LAMP
1	OUT GROUND
2	N/C
3	HIGH V

BOARD PIN #	INPUT
1	+V (V in)
2	V (GND)

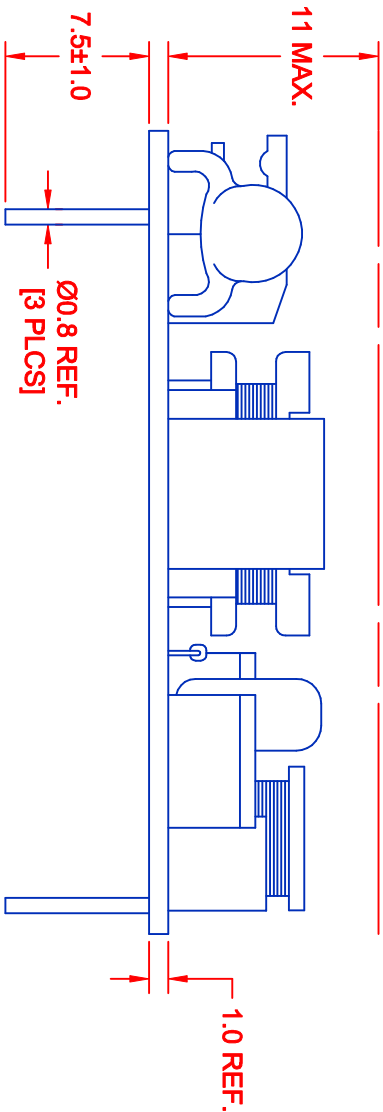

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	-----	180	250
OUTPUT VOLTAGE: (Vrms)	600	700	800
OUTPUT CURRENT (maRms)	4.0	5.5	7.0
OUTPUT FREQUENCY: (kHz)	10	25	40
OPERATING TEMP: (CELSIUS)	0	25	50

METRIC	DIMENSIONS ARE IN MILLIMETERS	TITLE
THIRD ANGLE PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.3 2 PL +/- 0	CCFL POWER SUPPLY
DRAWN BY L. WENGSTROM	APPROVED BY F.D.	DATE 1/3/03
SCALE NONE	SIZE A	FIG. NO. 55335
MANUAL REVISIONS NOT PERMITTED	RELEASED DATE 1/3/03	DRAWING NO. BXA-12553
	REVISION DATE	REV. NO.
		SHEET OF