

REPLACEMENT COVER

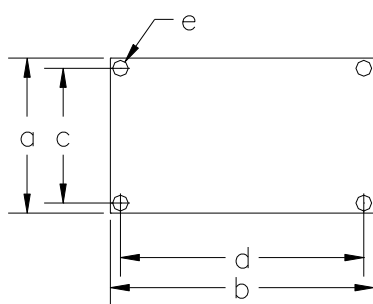


FIG. 1

MOUNTING COVER

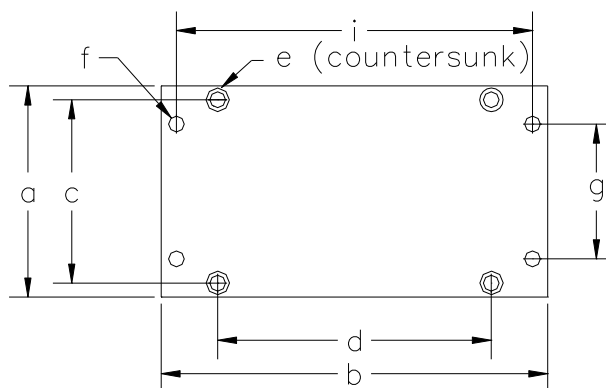


FIG. 2

REPLACEMENT COVER

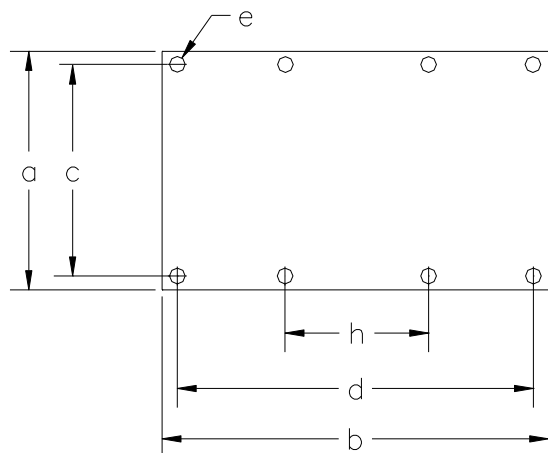


FIG. 3

MOUNTING COVER

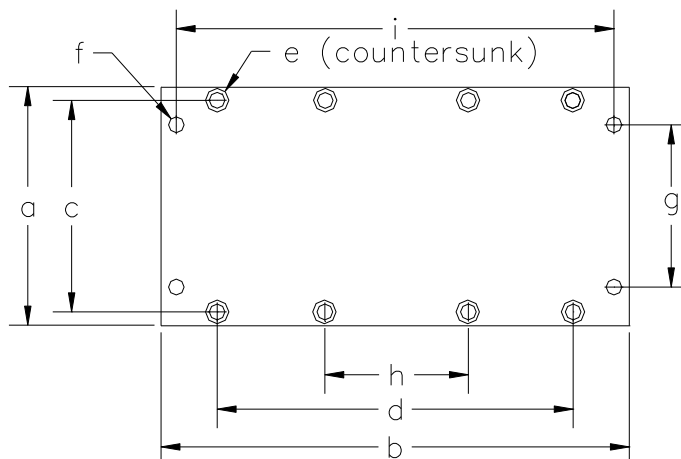


FIG. 4

All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Model	Fits Box Size	Fig.	Material	Material Thickness	a	b	c	d	e	f	g	h	i
4742	Miniature	1	1100-H14	.040	1.04	1.41	.843	1.22	.096				
3729	Miniature	3	6061-T6	.080	1.15	2.50	.843	2.19	.150	.100		1.22	
4245	A	1	1100-H14	.040	1.03	2.16	.843	1.97	.096				
3728	A	3	6061-T6	.080	1.15	3.25	.843	2.94	.150	.100		1.96	
4246	B	1	1100-H14	.040	1.28	2.16	1.09	1.97					
3719	B	3	6061-T6	.090	1.40	3.25	1.09	2.94	.150	.100		1.96	
4248	C	3	1100-H14	.080	2.50	4.12	2.25	3.87	.140			1.29	
4726	D	1	1100-H14	.063	2.48	2.99	2.25	2.63					
3958	D	2	1100-H14	.080	2.50	4.12	2.25	2.63	.125 (CS)	.201	1.75		3.618
4416	E	3	1100-H14	.080	4.02	8.12	3.80	7.90	.140			2.63	
4247	F,G,H	3	1100-H14	.080	2.50	4.12	2.25	3.87					
3328	F,G,H	4	6061-T6	.080	2.50	5.25	2.25	4.75	.140 (CS)	.201	1.75	1.29	4.75
4658	J	1	1100-H14	.063	1.37	4.12	1.20	3.95	.096				
5198	L	1	1100-H14	.063	2.87	5.87	2.70	5.70	.096				

CS = Countersunk Hole

All dimensions are in inches. To convert to metric multiply inches by 25.4.

Model	Replace Screws (package of 100)	Connector Screws with Solder Turret (package of 100)
Miniature	4864	2352
A	4864	2352
B	4864	2352
C	6268	2352
D	6268	2352
E	6268	---
F	4862	2352
G	4862	---
H	4862	---
J	4864	2352
L	4864	---

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com