


## Features

- Peak pulse power:
  - 600 W (10/1000 µs)
- Stand off voltage range: from 5 V to 188 V
- Unidirectional and bidirectional types
- Operating  $T_j$  max: 150 °C
- JEDEC registered package outline

## Complies with the following standards

- IEC61000-4-2 level 4
  - 15 kV (air discharge)
  - 8 kV (contact discharge)
- IEC61000-4-5 (see *Table 3* for surge level)
- MIL STD 883G - Method 3015-7 Class 3B
  - 25 kV HBM (human body model)
- UL94V-0 approved resin
- MIL-STD-750, Method 2026 soldererability
- EIA STD RS-481 and IEC60286-3 packing
- IPC7531 footprint

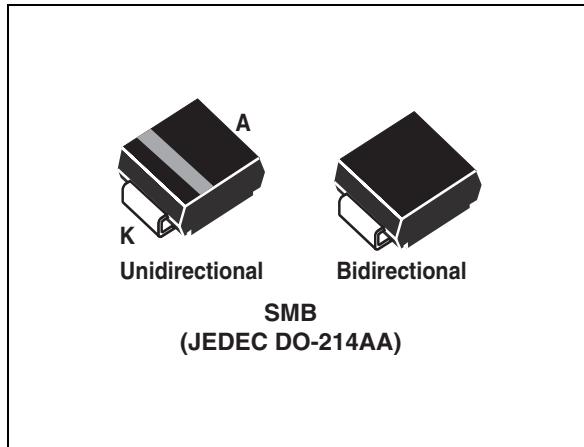

## Description

The SMBJ Transil series has been designed to protect sensitive equipment against electrostatic discharges according to IEC61000-4-2, MIL STD 883 Method 3015, and electrical overstress such as IEC61000-4-4 and 5. They are more generally for surges below 600 W 10/1000 µs.

The planar technology makes it compatible with high-end equipment and SMPS where low leakage current and high junction temperature are required to provide reliability and stability over time.

SMBJ are packaged in SMB (SMB footprint in accordance with IPC 7531 standard).

TM: Transil is a trademark of STMicroelectronics

# 1 Characteristics

**Table 1. Absolute maximum ratings ( $T_{amb} = 25^{\circ}\text{C}$ )**


Symbol	Parameter	Value	Unit
$P_{PP}$	Peak pulse power dissipation <sup>(1)</sup>	600	W
$P$	Power dissipation on infinite heatsink	6	W
$I_{FSM}$	Non repetitive surge peak forward current for unidirectional types	100	A
$T_{stg}$	Storage temperature range	-65 to +150	°C
$T_j$	Operating junction temperature range	-55 to +150	°C
$T_L$	Maximum lead temperature for soldering during 10 s.	260	°C

1. For a surge greater than the maximum values, the diode will fail in short-circuit.

**Table 2. Thermal resistances**

Symbol	Parameter	Value	Unit
$R_{th(j-l)}$	Junction to leads	20	°C/W
$R_{th(j-a)}$	Junction to ambient on recommended pad layout	100	°C/W

**Figure 1. Electrical characteristics - parameters**




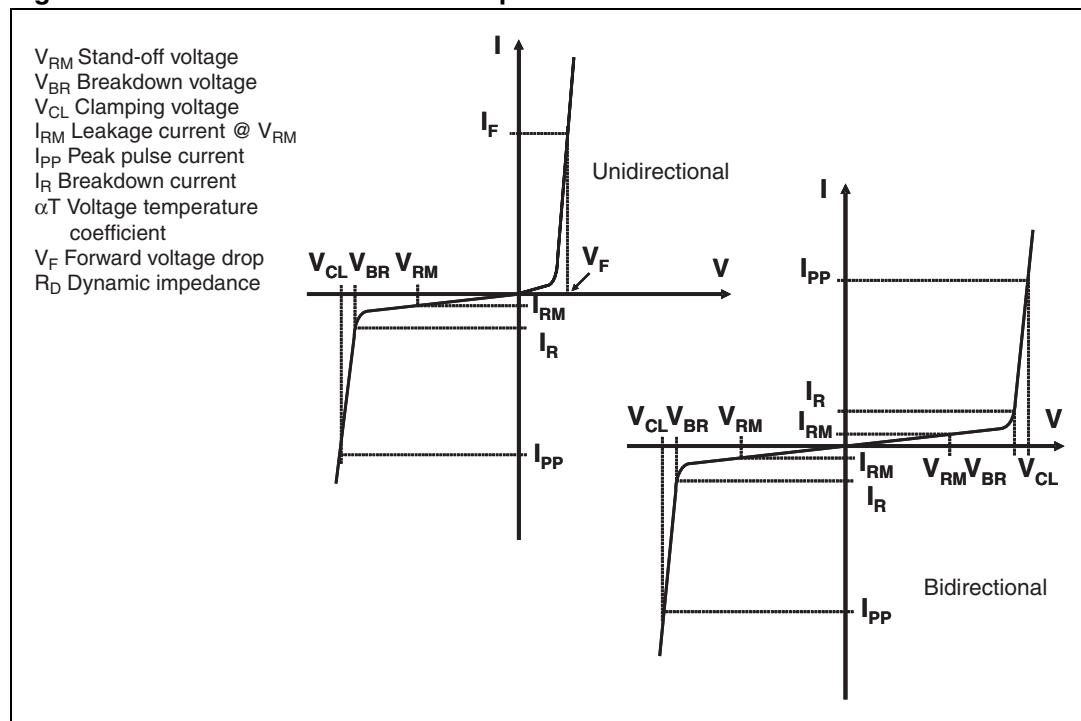


**Table 3. Electrical characteristics - parameter values ( $T_{amb} = 25^{\circ}\text{C}$ )**


Type	$I_{RM} @ V_{RM}$		$V_{BR} @ I_R \text{ min}^{(1)}$		$V_{CL} @ I_{PP}$ 10/1000 $\mu\text{s}$		$V_{CL} @ I_{PP}$ 8/20 $\mu\text{s}$		$\alpha T^{(2)}$
	max		min		max		max		
	$\mu\text{A}$	V	V	mA	V	A	V	A	10-4/ $^{\circ}\text{C}$
SMBJ5.0A/CA	800	5.0	6.4	10	9.2	68	13.4	298	5.7
SMBJ6.0A/CA	800	6.0	6.7	10	10.3	61	13.7	290	5.9
SMBJ6.5A/CA	500	6.5	7.2	10	11.2	56	14.5	276	6.1
SMBJ8.5A/CA	5	8.5	9.4	1	14.4	41.7	19.5	205	7.3
SMBJ10A/CA	5	10	11.1	1	17	37	21.7	184	7.8
SMBJ12A/CA	5	12	13.3	1	19.9	31	25.3	157	8.3
SMBJ13A/CA	1	13	14.4	1	21.5	29	27.2	147	8.4
SMBJ15A/CA	1	15	16.7	1	24.4	25.1	32.5	123	8.8
SMBJ16A/CA	1	16	17.8	1	26	23.1	34.4	116	8.8
SMBJ18A/CA	1	18	20.0	1	29.2	21.5	39.3	102	9.2
SMBJ20A/CA	1	20	22.2	1	32.4	19.4	42.8	93	9.4
SMBJ22A/CA	1	22	24.4	1	35.5	17.7	48.3	83	9.6
SMBJ24A/CA	1	24	26.7	1	38.9	16	50	80	9.6
SMBJ26A/CA	1	26	28.9	1	42.1	14.9	53.5	75	9.7
SMBJ28A/CA	1	28	31.1	1	45.4	13.8	59	68	9.8
SMBJ30A/CA	1	30	33.3	1	48.4	13	64.3	62	9.9
SMBJ33A/CA	1	33	36.7	1	53.3	11.8	69.7	57	10.0
SMBJ36A/CA	1	36	40.0	1	58.1	10.3	76	52	10.0
SMBJ40A/CA	1	40	44.4	1	64.5	9.7	84	48	10.1
SMBJ43A/CA	1	43	47.7	1	69.3	9.0	90.3	44.6	10.2
SMBJ48A/CA	1	48	53.3	1	77.4	8.1	100	40	10.3
SMBJ58A/CA	1	58	64.4	1	93.6	6.7	121	33	10.4
SMBJ70A/CA	1	70	77.8	1	113	5.5	146	27	10.5
SMBJ85A/CA	1	85	94	1	137	4.6	178	22.5	10.6
SMBJ100A/CA	1	100	111	1	162	3.8	212	19	10.7
SMBJ130A/CA	1	130	144	1	209	3	265	15	10.8
SMBJ154A/CA	1	154	171	1	246	2.4	317	12.6	10.8
SMBJ170A/CA	1	170	189	1	275	2.2	353	11.3	10.8
SMBJ188A/CA	1	188	209	1	328	2	388	10.3	10.8

1. Pulse test :  $t_p < 50 \text{ ms}$ 2. To calculate  $V_{BR}$  versus junction temperature, use the following formula:  


$$V_{BR} @ T_J = V_{BR} @ 25^{\circ}\text{C} \times (1 + \alpha T \times (T_J - 25))$$

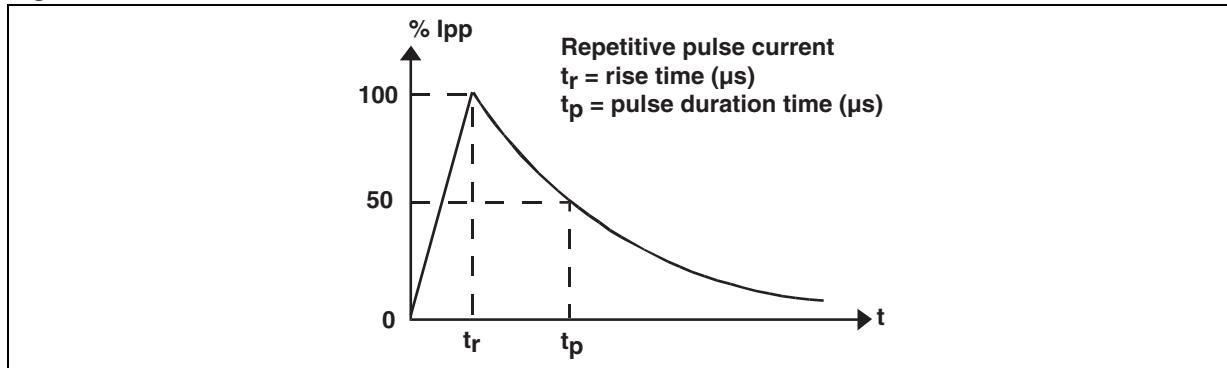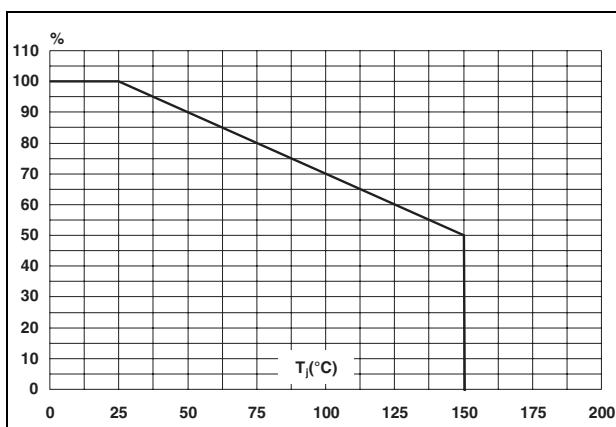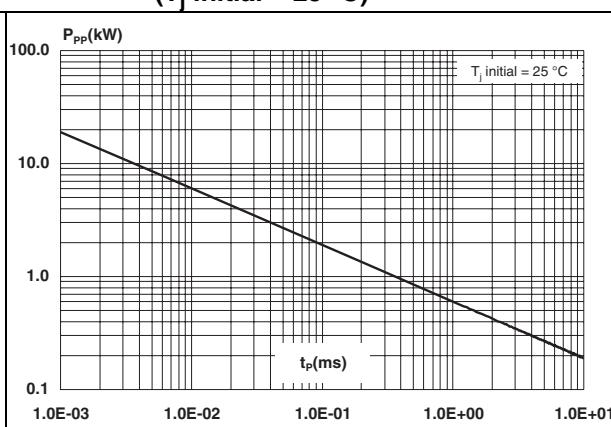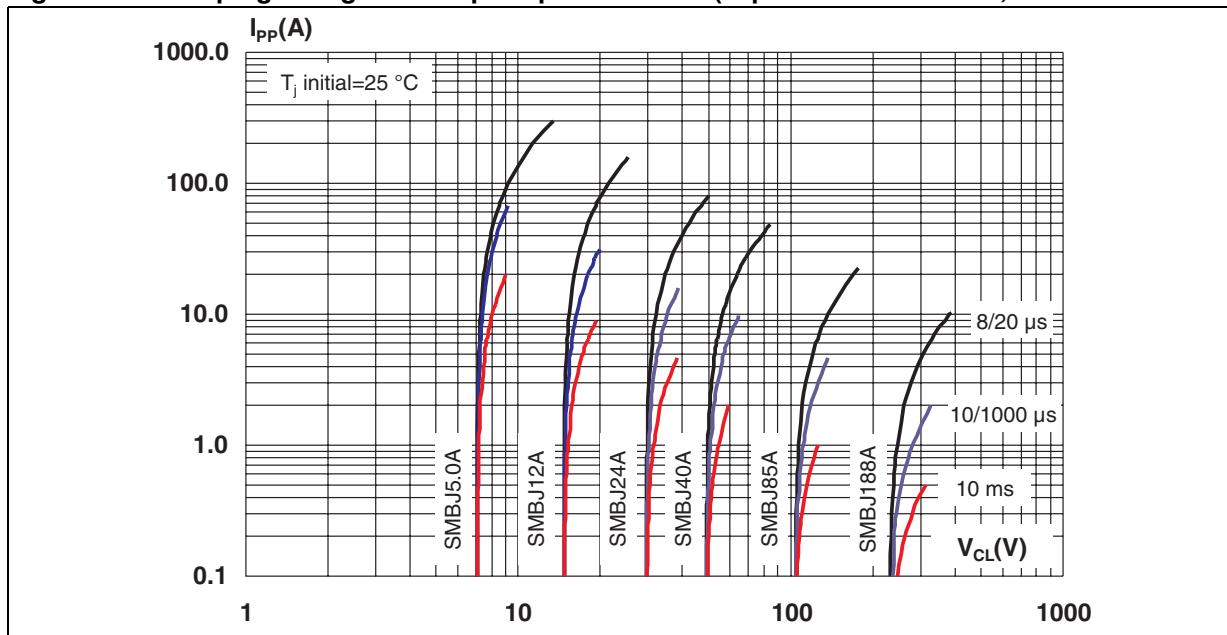**Figure 2. Pulse waveform****Figure 3. Peak pulse power dissipation versus initial junction temperature****Figure 4. Peak pulse power versus exponential pulse duration ( $T_j$  initial = 25 °C)****Figure 5. Clamping voltage versus peak pulse current (exponential waveform, maximum values)**


**Figure 6. Junction capacitance versus reverse applied voltage for unidirectional types (typical values)**

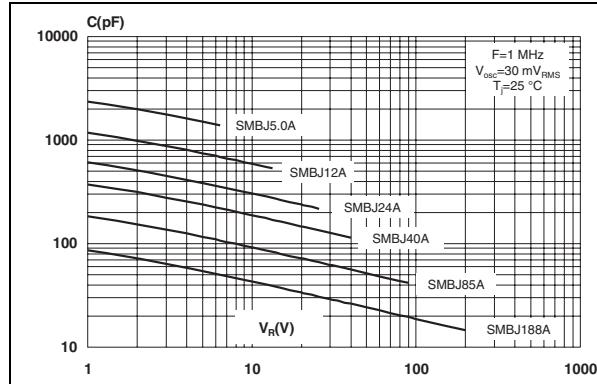


**Figure 8. Peak forward voltage drop versus peak forward current (typical values)**

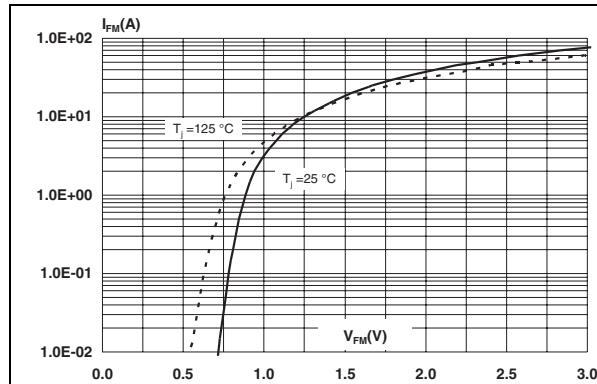


**Figure 10. Thermal resistance, junction to ambient, versus copper surface under each lead**

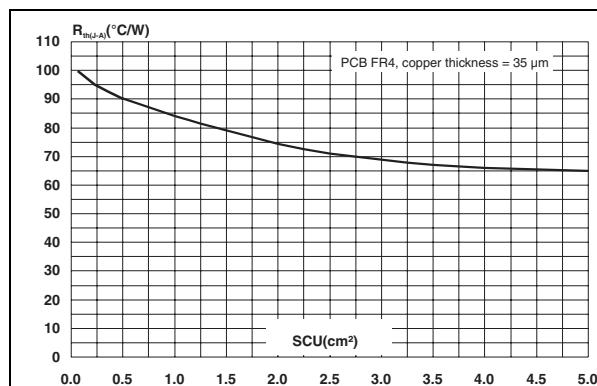


**Figure 7. Junction capacitance versus reverse applied voltage for bidirectional types (typical values)**

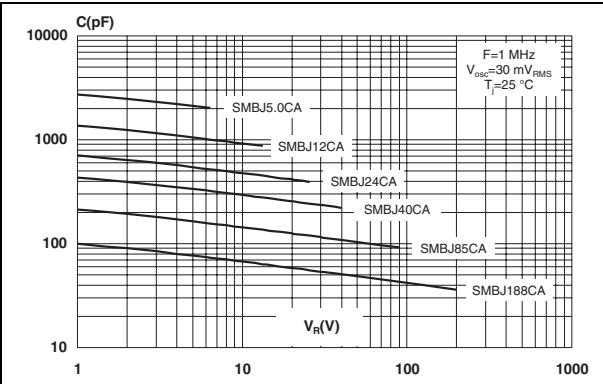

**Figure 9. Relative variation of thermal impedance, junction to ambient, versus pulse duration**

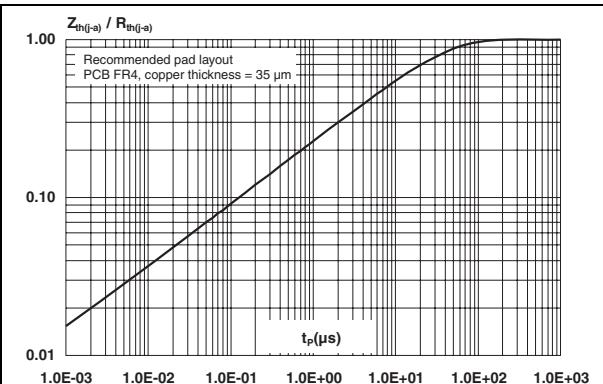


**Figure 11. Relative leakage current versus junction temperature (typical values)**

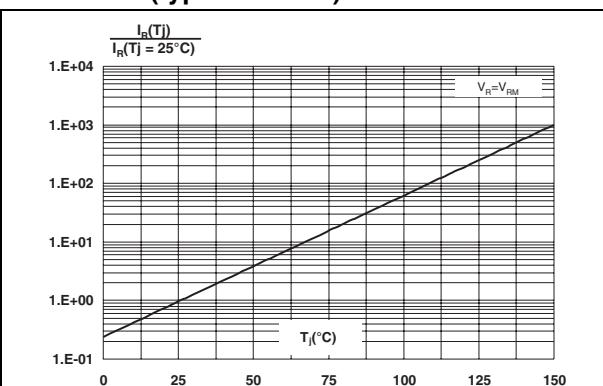

## 2 Ordering information scheme

**Figure 12. Ordering information scheme**

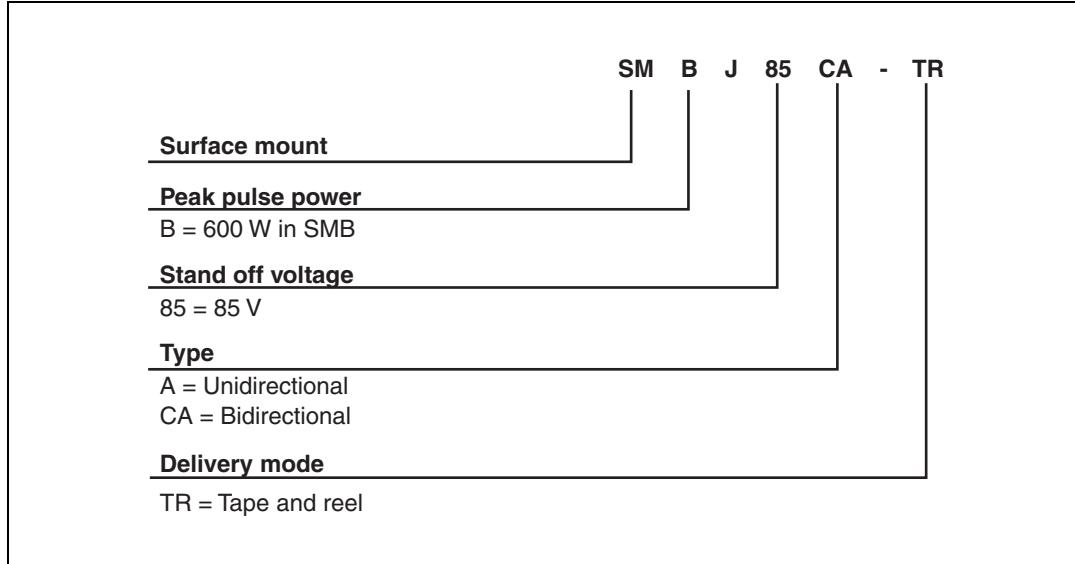


### 3 Package information

- Case: JEDEC DO-214AA molded plastic over planar junction
- Terminals: solder plated - solderable per MIL-STD-750, Method 2026
- Polarity: for unidirectional types the band indicates cathode
- Flammability: epoxy is rated UL94V-0
- RoHS package

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com).  
ECOPACK® is an ST trademark.


**Table 4. SMB dimensions**

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.075	0.096
A2	0.05	0.20	0.002	0.008
b	1.95	2.20	0.077	0.087
c	0.15	0.40	0.006	0.016
E	5.10	5.60	0.201	0.220
E1	4.05	4.60	0.159	0.181
D	3.30	3.95	0.130	0.156
L	0.75	1.50	0.030	0.059

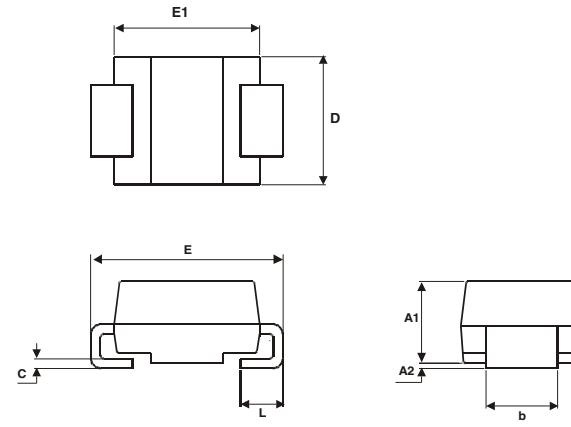

**Figure 13. Footprint dimensions  
in mm (inches)**

**Figure 14. Marking layout**

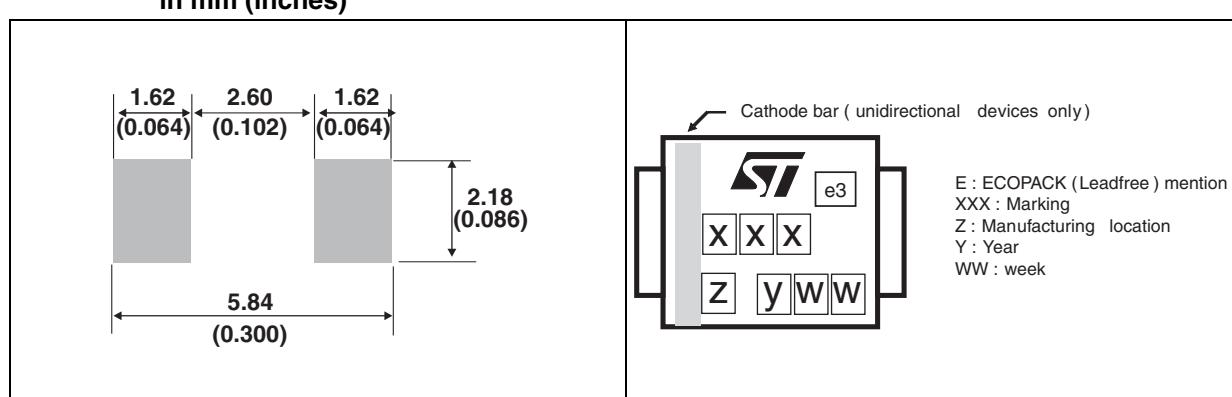

**Table 5. Marking**

Type	Marking	Type	Marking
SMBJ5.0A-TR	BUZ	SMBJ5.0CA-TR	BBZ
SMBJ6.0A-TR	BUA	SMBJ6.0CA-TR	BBA
SMBJ6.5A-TR	BUB	SMBJ6.5CA-TR	BBB
SMBJ8.5A-TR	BUC	SMBJ8.5CA-TR	BBC
SMBJ10A-TR	BUD	SMBJ10CA-TR	BBD
SMBJ12A-TR	BUE	SMBJ12CA-TR	BBE
SMBJ13A-TR	BUF	SMBJ13CA-TR	BBF
SMBJ15A-TR	BUG	SMBJ15CA-TR	BBG
SMBJ16A-TR	CUG	SMBJ16CA-TR	CBG
SMBJ18A-TR	BUH	SMBJ18CA-TR	BBH
SMBJ20A-TR	BUI	SMBJ20CA-TR	BBI
SMBJ22A-TR	BVA	SMBJ22CA-TR	CBH
SMBJ24A-TR	BUJ	SMBJ24CA-TR	BBJ
SMBJ26A-TR	BUK	SMBJ26CA-TR	BBK
SMBJ28A-TR	BUL	SMBJ28CA-TR	BBL
SMBJ30A-TR	BUM	SMBJ30CA-TR	BBM
SMBJ33A-TR	BUN	SMBJ33CA-TR	BBN
SMBJ36A-TR	CUN	SMBJ36CA-TR	CBN
SMBJ40A-TR	CUJ	SMBJ40CA-TR	CBJ
SMBJ43A-TR	CUW	SMBJ43CA-TR	CBW
SMBJ48A-TR	BUW	SMBJ48CA-TR	BBW
SMBJ58A-TR	BUO	SMBJ58CA-TR	BBO
SMBJ70A-TR	CUM	SMBJ70CA-TR	CBM
SMBJ85A-TR	BUQ	SMBJ85CA-TR	BBQ
SMBJ100A-TR	CUQ	SMBJ100CA-TR	CBQ
SMBJ130A-TR	BUS	SMBJ130CA-TR	BBS
SMBJ154A-TR	BUT	SMBJ154CA-TR	BBT
SMBJ170A-TR	BUU	SMBJ170CA-TR	BBU
SMBJ188A-TR	BUV	SMBJ188CA-TR	BBV

## 4 Ordering information

**Table 6. Order codes**

Order codes	Marking	Package	Weight	Base qty	Delivery mode
SMBJxxxA-TR	See <a href="#">Table 5</a>	SMB	0.12 g	2500	Tape and reel
SMBJxxxCA-TR	See <a href="#">Table 5</a>	SMB	0.12 g	2500	Tape and reel

## 5 Revision history

**Table 7. Document revision history**

Date	Revision	Changes
Oct-2001	4	Previous issue
10-Feb-2005	5	Reformatted to current template. Added directional (uni and bi) indications to graphics. Added ECOPACK statement.
16-Nov-2006	6	Add part numbers SMBJ36A-TR and SMBJ36CA-TR in <a href="#">Table 3</a> .
14-May-2009	7	Reformatted to current standards. Updated ECOPACK statement. Added part number SMBJ43CA/A.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)