


PLUGBORD™ PART NO. : 3677-2

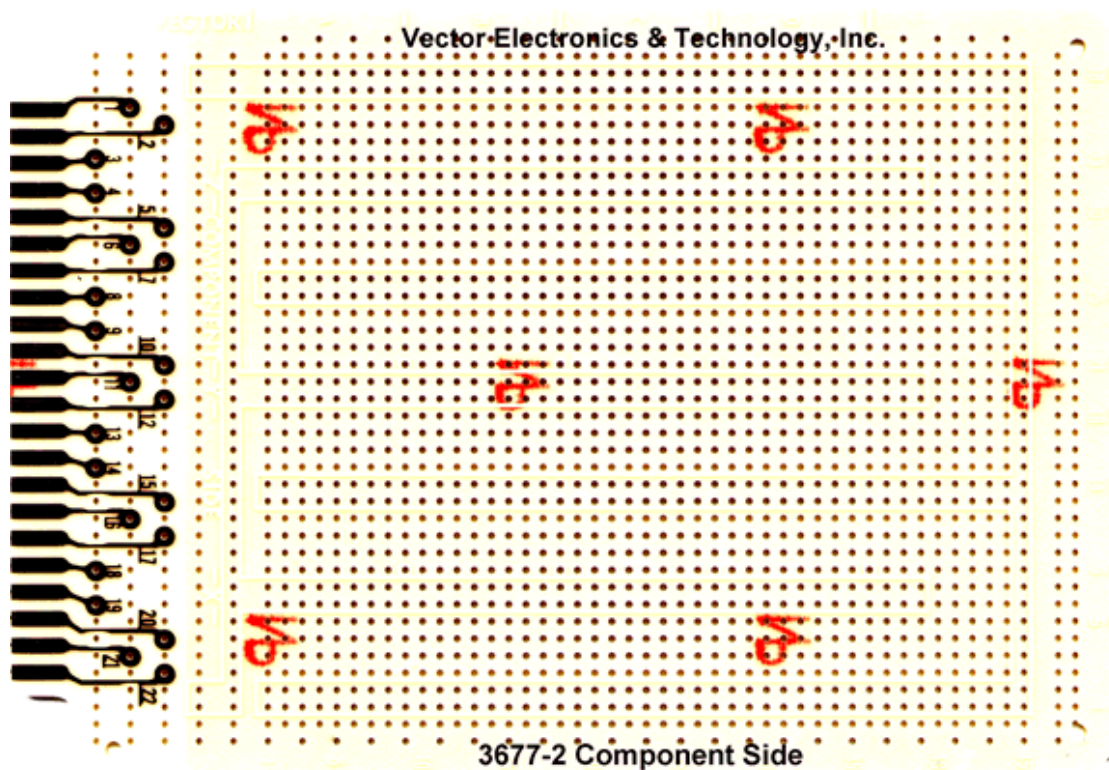

Description :

- 4.5" X 6.5" X 0.062, Hole Dia.: 0.042", Grid: 0.100" X 0.100"
- 3-Hole Solder Pads (0.28" x 0.080") for interconnecting multiple component leads
- Holes are not plated-thru.
- Voltage/ground buses interleaved between pad areas on wiring side
- Test point area with solder pads around holes, provided along back edge of board
- Unclad test point area at top of board
- Row and column legends provided
- Layout paper and instructions included

Circuit Pattern :	3-Hole Solder Pad 1 side only
Contacts :	22/44 @ 0.156" Centers Ni / Gold
16 Pin DIP Capacity :	12
Hole Diameter :	0.042" { 1.0668 mm }
Grid :	0.100" X 0.100" { 2.54mm X 2.54mm }
Dimension { H, W, T } :	4.5" X 6.5" X 0.062"
Material :	CEM-1
Wire-Wrap Terminals :	T44, T46, T49 & T68
Solder Connector :	R644
Wire-Wrap Socket Pins :	R32
Wire-Wrap Connector :	R644-3
Extender :	3690

Recommended Card Cage: [CCK 13 Series Card Cage { Subracks }](#)

NEMA Grade : CEM-1

UL Flammability Class : 94V - 0

email us your requirements : inquire@vectorelect.com

11115 Vanowen St., North Hollywood, CA - 91605, USA

Tel: (818) 985 8208, (800) 423 5659; Fax: (818) 985 7708

Circbord®, Vectorbord® and VectorPak® are registered trademarks of Vector Electronics & Technology, Inc.
CompactPCI® is a registered trademark of PCIMG. © 2001 Vector Electronics & Technology, Inc. - All Rights Reserved

webmaster@vectorelect.com