

7.37 2.00 2.00 4.60 10.70

NOTES:

1. MATERIALS:

HOUSING: OPTIONAL, UL94V-O, HALOGEN FREE, COLOR: BLACK

TERMINAL: COPPER ALLOY HOLD DOWN: COPPER ALLOY

2. FINISH:


TERMINAL: OPTIONAL HOLD DOWN: MATTE TIN

UNDER PLATING: NICKEL OVERALL 3. PRODUCT SPECIFICATION: GS-12-1177

4. PACKAGE SPECIFICATION: GS-14-2359

5. THIS PART MATES WITH FCI RECEPTACLE WIRE CONNECTOR 10127716.

6. THIS PART IS APPLICABLE FOR REFLOW PROCESS WITH 260°C PEAK TEMPERATURE FOR 10 SECONDS.

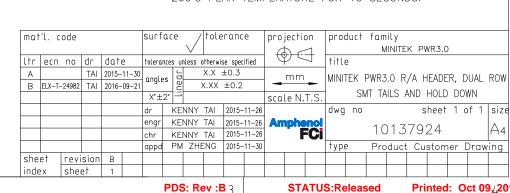

DIMENSION TABLE

POS	Α	В	С	D
02	6.65	NA	11.20	
04	9.65	3.00	14.20	6.74
06	12.65	6.00	17.20	
80	15.65	9.00	20.20	
10	18.65	12.00	23.20	
12	21.65	15.00	26.20	
14	24.65	18.00	29.20	
16	27.65	21.00	32.20	1.60
18	30.65	24.00	35.20	
20	33.65	27.00	38.20	
22	36.65	30.00	41.20	
24	39.65	33.00	44.20	

PART NUMBER SCHEME: 10137924-XX X X LF NO OF POS. 02: 2 POS. 24: 24 POS.

HSG MATERIAL

1. LCP, GLOW WIRE COMPATIBLE 2. LCP, NON GLOW WIRE COMPATIBLE

CONTACT PLATING

1. TIN
2. GOLD FLASH
3. 15u" Au, TIN ON SOLDER TAILS
4. 30u" Au, TIN ON SOLDER TAILS

В

form: A4mmXLc-2016-02-24

STATUS:Released Printed: Oct 09, 2016