




PRODUCT NUMBER: 835-13-003-40-030001

www.mill-max.com  
DATA SHEET

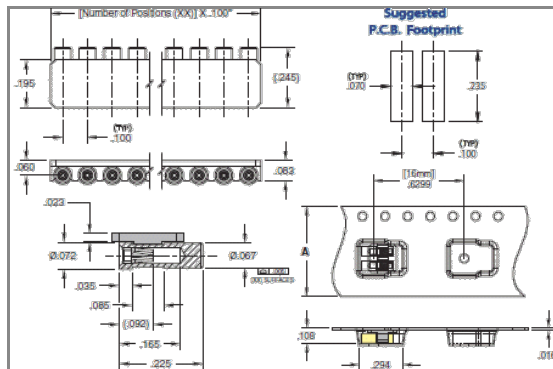

835-13-003-40-030001- SPECIFICATIONS

| General Info               |  |
|----------------------------|--|
| Description <sup>1</sup> : | Horizontal Mount Socket<br>Accepts .015"-.025" (0,381-0,635mm) dia leads |
| Type:                      | Interconnect   |
| Category:                  | Machined Pin Socket  |
| Mounting Style:            | Surface Mount  |
| # Pins:                    | 3  |
| Packaging <sup>2</sup> :   | Tape & Reel  |
| Qty Reel:                  | 1450   |
| Pitch:                     | .100" (2,540mm)  |
| Rows:                      | Single Row   |
| Product Lifecycle:         | Active   |

| Environmental Specs              |             |
|----------------------------------|-------------|
| Temperature Range <sup>3</sup> : | -55/+125° C |
| RoHS <sup>4</sup> :              | Yes         |

| Mechanical Specs |                 |
|------------------|-----------------|
| SMT Pad Size:    | .070" (1,778mm) |

| Materials                          |                               |
|------------------------------------|-------------------------------|
| Loose Pin/Receptacle # (Material): | 3530 (Brass Alloy)            |
| Shell Plating:                     | 10 μ" Gold over 100 μ" Nickel |
| Inner Contact #:                   | 30                            |
| # Contact Fingers:                 | 4                             |
| Inner Contact Material:            | Beryllium Copper              |
| Inner Contact Plating:             | 30 μ" Gold over 50 μ" Nickel  |
| Insulator Material:                | Nylon 4/6                     |

| Electrical Specs                 |                  |
|----------------------------------|------------------|
| Rated Voltage:                   | 100 VRMS/150 VDC |
| Insulation Resistance:           | 10,000 MΩ min.   |
| Dielectric Withstanding Voltage: | 1,000 VRMS min.  |

## NOTES:

### 1. Standard Tolerances

Assembly tolerance:  $\pm .010"$  (.25mm)

Connector Length "L"

| Connector Length "L"                          | Tolerance                                  |
|---|--|
| $L \leq 2"$ ( $L \leq 50.8$ mm)               | $\pm .005"$ ( $\pm .127$ mm)               |
| $2 < L \leq 3"$ ( $50.8 < L \leq 76.2$ mm)    | $+ .007 / - .006"$ ( $+ .178 / - .152$ mm) |
| $3 < L \leq 4"$ ( $76.2 < L \leq 101.6$ mm)   | $+ .009 / - .007"$ ( $+ .229 / - .178$ mm) |
| $4 < L \leq 5"$ ( $101.6 < L \leq 127$ mm)    | $+ .011 / - .008"$ ( $+ .279 / - .203$ mm) |
| $5 < L \leq 6.4"$ ( $127 < L \leq 162.56$ mm) | $+ .013 / - .009"$ ( $+ .330 / - .229$ mm) |

Insulator width:  $\pm .005$  (.13mm)

Insulator height:  $\pm .005$  (.13mm)

Co-planarity of SMT connectors: .005" (.13mm) up to 1" (25.4mm) in connector length

Insulator Flatness: .005" (.13mm) up to 1" (25.4mm) in connector length

Pin Length:  $\pm .005$  (.13mm)

Pin Diameter:  $\pm .002$  (.051mm)

Pin Angle:  $\pm 2^\circ$

### 2. 13" (330 mm) Reel

### 3. Per IEC 60512-11-(4,-9,-10,-12)

### 4. Mill-Max products labeled with the RoHS symbol are compliant with all three ROHS Directives. All of our products previously described as RoHS (2002/95/EC) and RoHS-2 (2011/65/EC) are also compliant with RoHS-3 (2015/863/EU).

## ADDITIONAL NOTES AND SPECIFICATIONS

In the interest of improved design, quality and performance, Mill-Max reserves the right to make changes in its specifications without prior notice. Specifications and tolerances are provided wherever possible. The tolerance on dimensions of critical to function features is typically held tighter than the stated standard tolerances, such as press-fits, holes and lengths affecting the coplanarity of SMT products. Due to the wide variety of interconnects Mill-Max offers, the specific tolerances vary from product to product. If you need information regarding the tolerance of a particular part, please contact Technical Services.

## RELATED LINKS AND DOCUMENTS

Environmental Compliance: ( <https://www.mill-max.com/rohs> )