

Product information N11R AM 2 D M20

https://catalog.beldensolutions.com:443/link/57078-24228-256281-256284-24367-24372-36308/en/cont/uistate	
Name	N11R AM 2 D M20
	Panel-mounted connector with metal screw-in casing (monoblock design), Stifte flüssigkeitsdicht montiert
Delivery informations	
Availability	available
Product description	
Description	Panel-mounted connector with metal screw-in casing (monoblock design),
	Stifte flüssigkeitsdicht montiert
Туре	N11R AM 2 D M20
Order No.	934 338-106
Type of contact	male
Number of contacts	11 + PE
Conductor size	max. 0.5 mm ²
Standard	DIN 43651
Housing Color	grey
Technical data	(*)
Pin dimensions	1.6 mm
Rated voltage	AC/DC 60 V
Rated current	5 A
Contact resistance	<= 5 m0hm
Type of termination	solder, concave pins
Suitable cables	0.14 mm ² to 0.5 mm ²
Mounting	M20x1.5
Material	
Contact surface material	Ag
Contact bearer material	PET
Housing material	PET
Environmental conditions	
Protection class (IEC 60529)	IP 65
Temperature range	-40 °C to +90 °C
Packing unit	
Packaging unit	10 pieces
Scope of delivery and accessories	
Scope of delivery	1 panel-mounted connector with 0-Ring in polythene bag with assembly instructions
Accessories to order separately	can be plugged into N11R FF, N11R EF;
	protective cover SHK 2,
	order no. 733 845-001






Industrial Connecting Solutions:Circular Connectors:MIL, DIN, Universal Connectors:DIN 43651 Connectors (NR series):Panel-mounted connector:N11R AM 2 D M20 https://catalog.beldensolutions.com:443/link/57078-24228-256281-256284-24367-24372-36308/en/conf/uistate

Picture

Drawing

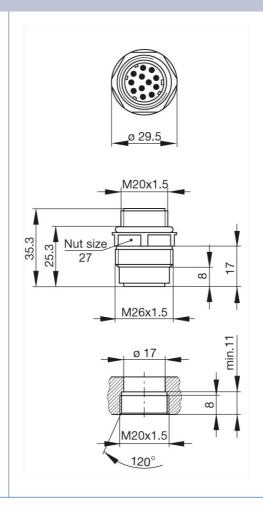

Belden Deutschland GmbH

Im Gewerbepark 2 58579 Schalksmühle Germany

Phone: +49 7127/14-1806 E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

