

## Product information N6R FF S 11

	Connectors:MIL, DIN, Universal Connectors:DIN 43651 Connectors (NR series):Angled cable socket:N6R FF S 11  1078-24228-256281-256284-24367-24369-36232/en/conf/uistate
Name	N6R FF S 11
	Angled cable socket, strain relief by means of a clamping cage, transparent cap, for installation of the LED insert
Delivery informations	
Availability	available
Product description	Analysis askin askin statis at a few mana of a planning and
Description	Angled cable socket, strain relief by means of a clamping cage, transparent cap, for installation of the LED insert
Туре	N6R FF S 11
Order No.	932 194-112
Type of contact	female
Number of contacts	6 + PE
Cable gland	PG 11
Cable diameter	7 mm to 9 mm
Conductor size	max. 1.5 mm <sup>2</sup>
Standard Usering Color	DIN 43651
Housing Color Technical data	transparent/grey
Pin dimensions	1.6 mm
Rated voltage	AC/DC 250 V
Rated current	10 A
Contact resistance	<= 5 m0hm
Type of termination	screw
Suitable cables	0.5 mm <sup>2</sup> to 1.5 mm <sup>2</sup>
Material	0.3 IIIII   0.1.3 IIIII
Contact surface material	Ag
Contact bearer material	PET
Housing material	PET
Environmental conditions	11-2
Protection class (IEC 60529)	IP 65
Temperature range	-40 °C to +90 °C
Packing unit	
Packaging unit	10 pieces
Scope of delivery and accessories	
Scope of delivery	1 cable sockets, not assembled, in polythene bag, with assembly instructions
Accessories to order separately	can be plugged into N6R AM,
	N6R AM, N6R BM, N6R DM;
	LED-insert N6R 3 LED 24,
	order no. 831 411-001
	LED-insert N6R 3 LED 24 DB,
	order no. 831 618-001
	coding NC 6,
	order no. 831 002-011






Industrial Connecting Solutions: Circular Connectors: MIL, DIN, Universal Connectors: DIN 43651 Connectors (NR series): Angled cable socket: NGR FF S 11 https://catalog.beldensolutions.com:443/link/57078-24228-256281-256284-24367-24369-36232/en/conf/uistate

Picture

Drawing

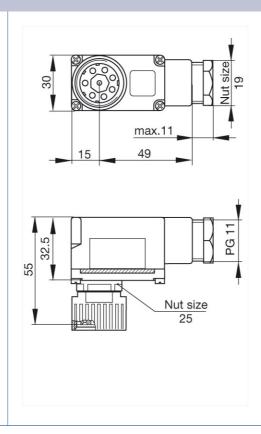

## Belden Deutschland GmbH

lm Gewerbepark 2 58579 Schalksmühle

Germany

Phone: +49 7127/14-1806 E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect.

The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

