

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 774508



Features


- Small package dimensions
- Lead free version available (see How to Order "Termination" options)
- RoHS compliant*
- Power rating at 70 °C = 1/16 W
- Tight dimensional tolerances
- Three layer termination process with nickel barrier prevents leaching and provides excellent solderability
- Suitable for most types of soldering processes
- Standard packaging on paper tape and reel

CR0402 - Chip Resistor

Electrical Characteristics


Power Rating @ 70 °C.....1/16 W
 Operating Temperature Range
-55 °C to +125 °C
 Derated to 0 Load at+125 °C
 Maximum Working Voltage.....25 V
 Maximum Overload Voltage50 V
 Resistance Range
 1 %, E-96 and E-24
10 ohms to 1 megohm
 5 %, E-24
2 ohms to 5.6 megohms
 Zero Ohm Jumper.....<0.05 ohms
 Temperature Coefficient
 1 %±100 ppm/°C
 5 %±200 ppm/°C
 1 ohm to 10 ohms
-200 ppm/°C to +500 ppm/°C

Derating Curve

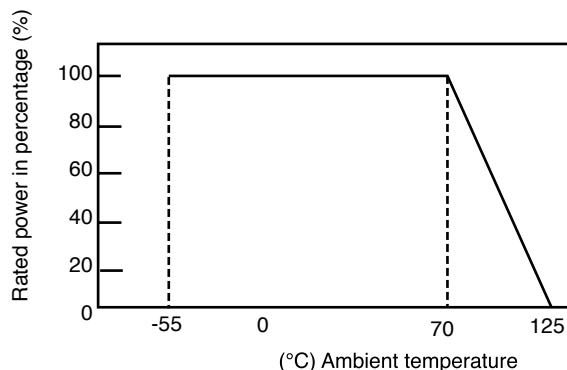


For Standard Values Used in Capacitors, Inductors, and Resistors, [click here](#).




Dimensional Drawings

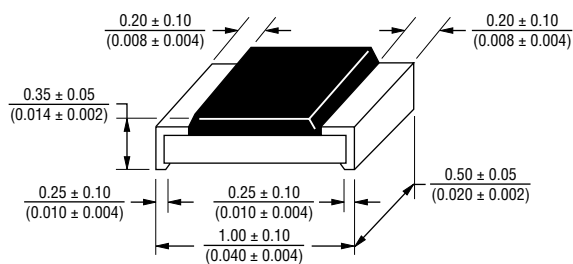

DIMENSIONS ARE: $\frac{\text{MM}}{\text{(INCHES)}}$

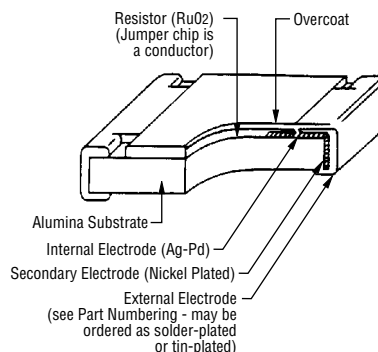


Characteristic Data

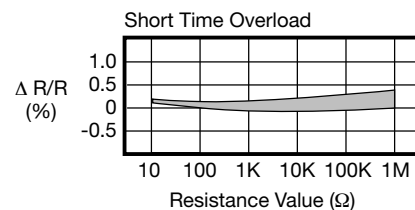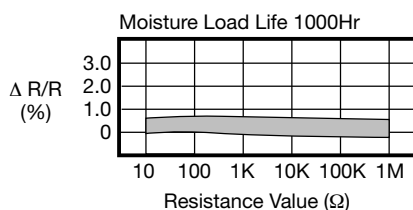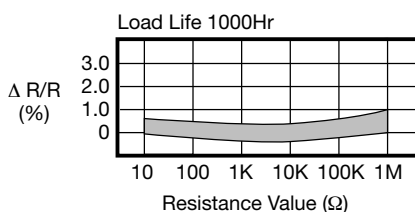


CR0402 - Chip Resistor

BOURNS®

Soldering Profile for Lead Free Chip Resistors and Arrays

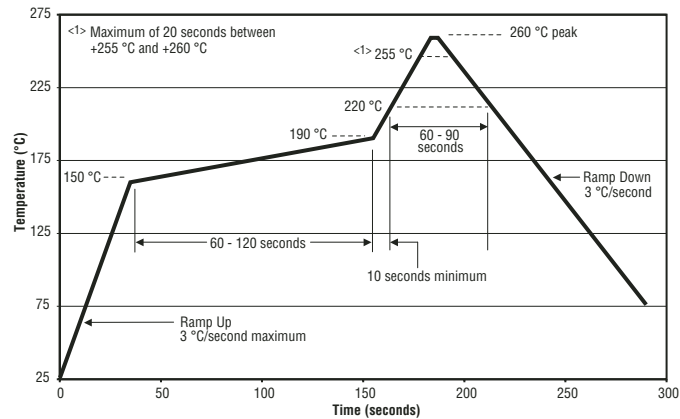

Packaging Dimensions (Conforms to EIA RS-481A)

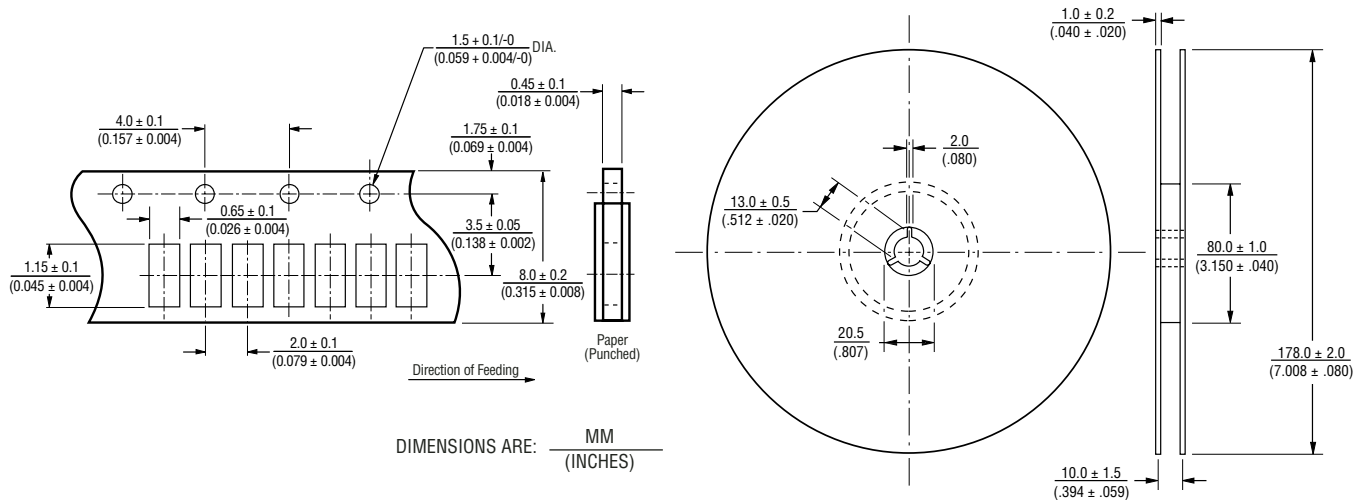

Part Marking System

No Marking on the CR0402 Chip Resistors.

CR0402 - Chip Resistor

BOURNS®

How To Order

CR 0402 - F X - 8252 G

Model _____
(CR = Chip Resistor)

Size _____
• 0402

Resistance Tolerance _____
F = $\pm 1\%$ Used with "X" TCR code only for values from 10 ohms through 1 megohm.
J = $\pm 5\%$ Used with "W" TCR code for values from 10 ohms through 5.6 megohms. Used with "/" TCR code for zero ohm (jumper)
.....and for values from 1 ohm through 9.1 ohms.

TCR (ppm/ $^{\circ}$ C) _____
X = ± 100 Used with "F" Resistance Tolerance code only for values from 10 ohms through 1 megohm.
W = ± 200 Used with "J" Resistance Tolerance code only for values from 10 ohms through 5.6 megohms.
/ = -250 to +500 ..Used with "J" Resistance Tolerance code only for zero ohm (jumper), and for values from 1 ohm through 9.1ohms.

Resistance Value _____
For 1 % Tolerance:
<100 ohms....."R" designates decimal point (example: 24R3 = 24.3 ohms)
 ≥ 100 ohms.....First three digits are significant, fourth digit represents number of zeros to follow (example: 8252 = 82.5k ohms).
For 5 % Tolerance:
<10 ohms....."R" designates decimal point (example: 4R7 = 4.7 ohms)
 ≥ 10 ohms.....First two digits are significant, third digit represents number of zeros to follow (example: 474 = 470k ohms; 000 = Jumper).

Packaging _____
G = Paper Tape (10,000 pcs.) on 7 " Plastic Reel

Termination _____
LF = Tin-plated (lead free)
___ = Solder-plated