
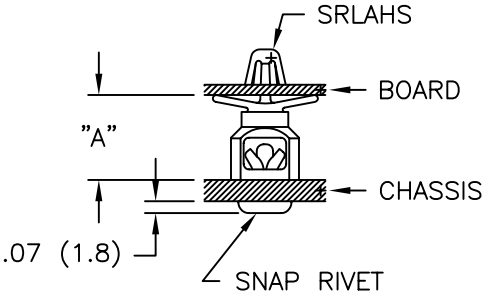


PART NO.	"A"
SRLAHS-7-01	7/16 (11.1)
SRLAHS-8-01	1/2 (12.7)
SRLAHS-10-01	5/8 (15.9)
SRLAHS-12-01	3/4 (19.1)
SRLAHS-14-01	7/8 (22.2)
SRLAHS-16-01	1 (25.4)

USE RICHCO RIVET NO.	FOR CHASSIS THICKNESS
SR-4050	.026-.062 (0.7-1.6)
SR-4060	.062-.105 (1.5-2.7)
SR-4070	.105-.145 (2.7-3.7)
SR-4080	.145-.184 (3.7-4.7)
SR-4100	.223-.263 (5.7-6.7)

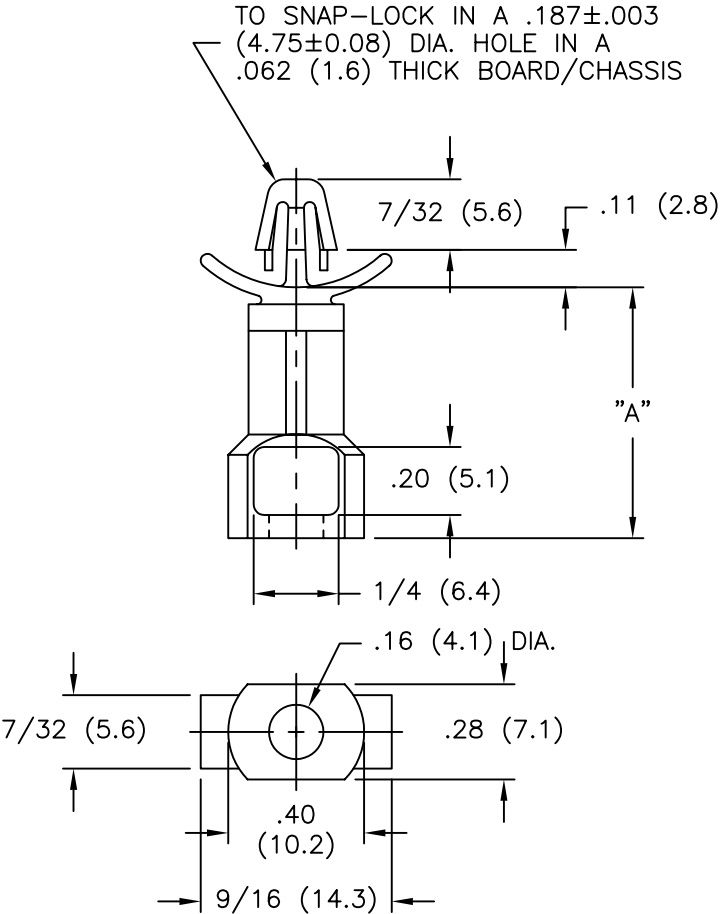

NOTES:

1. MATERIAL: NYLON 6/6 (RMS-01).
FLAME RETARDANT NYLON (RMS-19),
AVAILABLE BY SPECIAL ORDER ONLY.
2. COLOR: NATURAL.
3. .157-.161 (4.0-4.1) DIA. HOLE IN
CHASSIS REQUIRED FOR APPLICATION

A	UPDATED NOTES AND CHANGED FILE NO.	SM 08.20.02
REV	DESCRIPTION	ENGR DATE

TITLE: SNAP RIVET LOCKING ARROWHEAD SUPPORT					DWG IN IN (MM)	
TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1°	FILE #	SRLAHS	DWN: P.B.	FINAL		
	MAT'L:	SEE NOTES	DT: 05-03-94	DT:	PART #	PRINT TYPE
	RE:	RICHCO, INC.	RICHCO INC. PO BOX 804238,CHICAGO,60680 (773) 539-4060		SEE TABLE	CA