


ISOMETRIC



O.P. (MM)	P.T. (MM)
14.9±1.0	4.0 MAX

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. RATING: 0.4VA @20VAC OR DC
- ▲ 4. OPERATING FORCE: 40± 20 GRAMS
5. OPERATING TEMP: -25°C TO 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN. (C)
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP. (C)
8. INSULATION RESISTANCE: 100 MEGA-OHMS
9. DIELECTRIC STRENGTH: 1000VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 mΩ MAX.
- ▲ 11. CONTACTS: 10 MICRO INCHES MINIMUM GOLD PLATING (PN: Q990001)
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT (C)

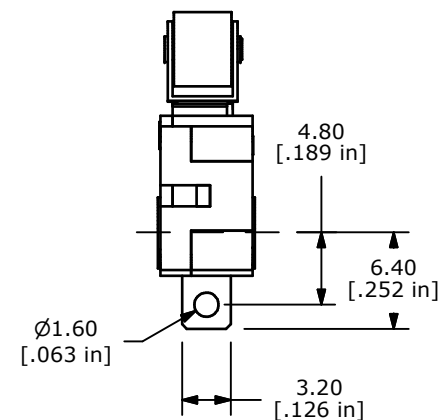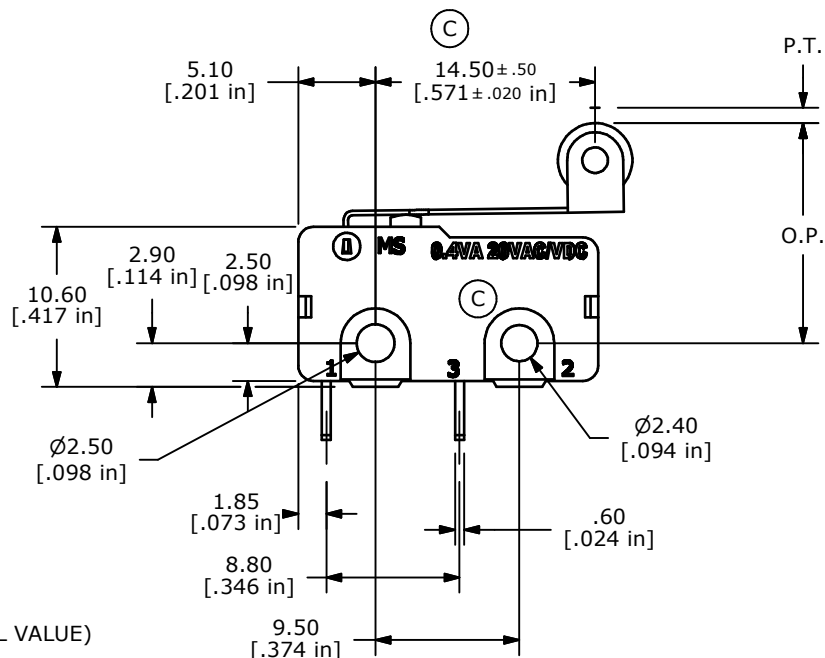

REV	PCR NO	DESCRIPTION	DATE	BY
D	15703	DIM FROM 5.15 TO 5.10	1/26/06	PH
C	15596	CHANGES NOTED	12/8/05	PH
B	15554	EDIT CIRCUIT	11/23/05	PH
A	15282	RELEASED FOR PRODUCTION	9/15/05	PH



TITLE MS085R105F040S1C

SCALE	DATE	DR	DWG	REV
2:1	9/15/2005	PH	Q970033	D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED