



DIMENSIONS:

A	3.438" ±0.063
B	3.125" ±0.125
C	4.125" ±0.063
D	2.750" ±0.063
E	2.375" ±0.063
F	2.938" ±0.063
G	0.203" X 0.375" ±0.015

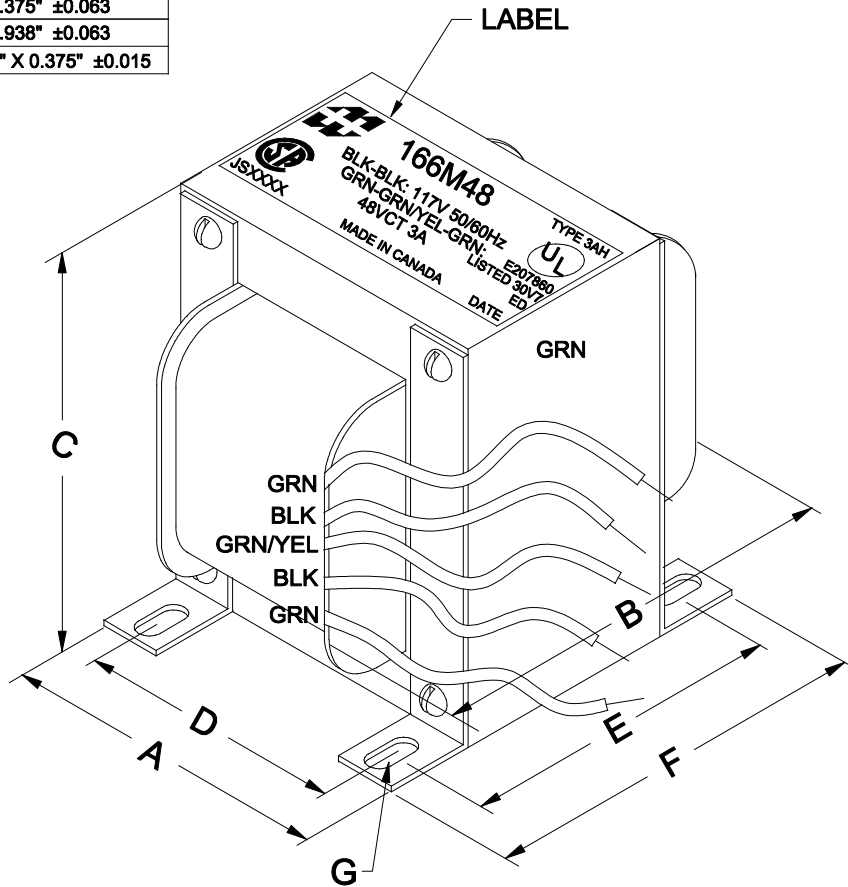

NOTE: ALL LEADS 9" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 117V, 60Hz, BLK - BLK	231mA Max.
Sec. N.L.V	@ 117V, 60Hz, BLK - BLK	
	GRN - GRN/YEL = GRN/YEL - GRN =	24.99V ±2%
	GRN - GRN =	49.97V ±2%
DCR	@ 20°C, BLK - BLK =	1.510 Ω ±20%
	@ 20°C, GRN - GRN =	0.260 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 09/14/15	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 166M48
			DATE: 09/14/15	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540