



# PRODUCT DATASHEET

## Leila series

last update 16/1/2013

## DETAILS

|                 |               |
|-----------------|---------------|
| Product Number  | FA10652_LC1-M |
| Family          | Leila         |
| Type            | Assembly      |
| Color           | black         |
| Diameter        | 21,6 mm       |
| Height          | 16,5 mm       |
| Style           | round         |
| Optic Material  | PMMA          |
| Holder Material | PC            |
| Fastening       | tape          |
| Status          | ready         |
| ROHS Comliant   | Yes           |
| Date Updated    | 16/01/2013    |



## OPTICAL PROPERTIES

|      | Viewing | Light  | Effi-  |       |           |
|------|---------|--------|--------|-------|-----------|
| LED  | Angle   | Beam   | ciency | cd/lm | Connector |
| XR-E | 28 deg  | Medium | -      | -     | -         |

D


C

B

A


4

4

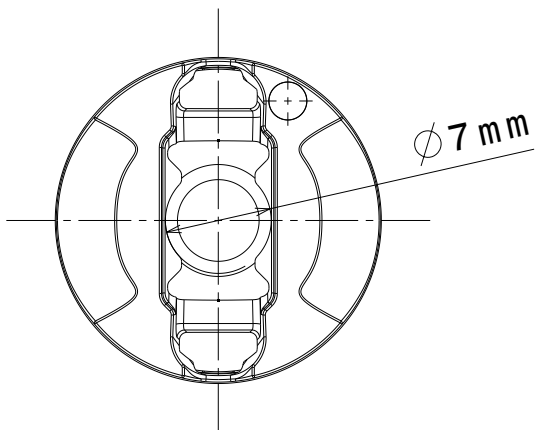

3


3

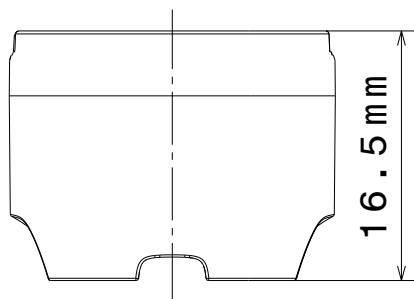

2

2

Materials:  
Lens PMMA  
Holder PC

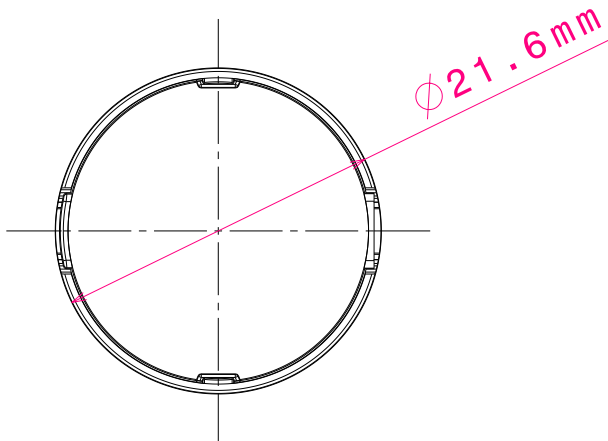

This drawing is our property.  
It can't be reproduced  
or communicated without  
our written agreement.



L  
T  
F  
F

e  
e  
l  
i  
n

d  
h

DRAWING TITLE

Datasheet LC1-Series Assy

DRAWN BY

DATE

29.04.2009

CHECKED BY

DATE

29.04.2009

DESIGNED BY

HH

DATE

21.02.2008

SIZE

A4

DRAWING NUMBER

REV

1

SCALE

2:1

WEIGHT (g)

SHEET

1/1

D

A

1

**NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.**

## **GENERAL INFORMATION**

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Fastening to heat sink with a PU foam adhesive tape of automotive grade. Please find fastening details by clicking link: [http://www.ledil.com/datasheets/DataSheet\\_TAPE.pdf](http://www.ledil.com/datasheets/DataSheet_TAPE.pdf)

**NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit board weaken the strength of the tape.**

**NOTE 2: Assembly to the surface must be made straight, so the tape bonds constant and balanced with fastening surface. Slanted assembly might cause unbalanced bond to the surface. All surfaces where tape is applied must be clean, dry and free from grease and dirt.**

**If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer - this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.**

**Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.**