



Features :

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation(option)
- Built-in EMI filter
- Protections: Short circuit / Overload
- Cooling by free air convection
- Five-sided shield metal case
- 100% burn-in test
- Low cost / High reliability
- Approvals: FCC / CE
- 2 years warranty




SPECIFICATION

ORDER NO.		DCW03A-05	DCW03B-05	DCW03C-05	DCW03A-12	DCW03B-12	DCW03C-12	DCW03A-15	DCW03B-15	DCW03C-15
OUTPUT	DC VOLTAGE	±5V			±12V			±15V		
	CURRENT RANGE	±30 ~ ±300mA			±12.5 ~ ±125mA			±10 ~ ±100mA		
	RATED POWER	3W								
	RIPPLE & NOISE (max.) Note.2	50mVp-p			60mVp-p			60mVp-p		
	LINE REGULATION Note.3	±0.5%								
	LOAD REGULATION Note.4	±0.5%								
	VOLTAGE ACCURACY	±2.0%								
	SWITCHING FREQUENCY	50KHz min.								
INPUT	VOLTAGE RANGE	A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 72VDC								
	EFFICIENCY (Typ.)	74%	75%	76%	80%	80%	82%	80%	80%	78%
	DC CURRENT	Full load	A: 338mA B: 167mA C: 83mA							
		No load	A: 18mA B: 10mA C: 5mA							
	FILTER	Pi network								
	PROTECTION	Fuse recommended								
PROTECTION (Note. 5)	OVERLOAD	160 ~ 250% rated output power								
		Protection type : Hiccup mode, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	All output equipped with short circuit								
		Protection type : Hiccup mode, recovers automatically after fault condition is removed								
ENVIRONMENT	WORKING TEMP.	-25 ~ + 71℃ (Refer to output load derating curve)								
	WORKING HUMIDITY	20% ~ 90% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-25 ~ +105℃, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03% / ℃ (0 ~ 50℃)								
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes								
	SAFETY & EMC	WITHSTAND VOLTAGE	I/P-O/P:1KVDC							
ISOLATION RESISTANCE		I/P-O/P: 100M Ohms / 500VDC / 25℃ / 70% RH								
ISOLATION CAPACITANCE		80pF max.								
EMI CONDUCTION & RADIATION		Compliance to EN55022 Class B, FCC part 15 Class B								
EMS IMMUNITY		Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A								
OTHERS		MTBF	900khrs min. MIL-HDBK-217F (25℃)							
	DIMENSION	31.8*20.3*12.2mm or 1.25**0.80**0.48" inch (L*W*H)								
	WEIGHT	15g								

Mechanical Specification


Unit:mm(inch)

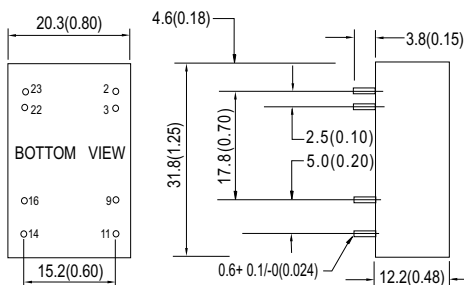

Pin Configuration

Pin No.	Output
2 & 3	-Vin
9	COM
11	-Vout
14	+Vout
16	COM
22 & 23	+Vin

Derating Curve

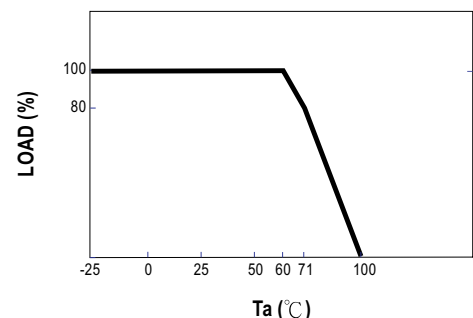

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
- 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- 3.Line regulation is measured from low line to high line at rated load.
- 4.Load regulation is measured from 10% to 100% rated load.
- 5.Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.

Model : DCW03C-15 3W DC-DC Dual Output Converter

V1 : +15V / 10~100mA

V2 : - 15V / 10~100mA

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	VOLTAGE ACCURACY	V1:-2%~+2% (Max) V2:-2%~+2% (Max)	I/P:48VDC O/P:50% LOAD Ta:25°C	V1:+0.8% V2:+1.0%	P
2	RIPPLE & NOISE	V1:100mVp-p (Max) V2:100mVp-p (Max)	I/P:48VDC O/P:FULL LOAD Ta:25°C	V1:15mV V2:18mV	P
3	LINE REGULATION	V1:-0.5%~+0.5% (Max) V2:-0.5%~+0.5% (Max)	I/P:36VDC~72VDC O/P:FULL LOAD Ta:25°C	V1:-0%~+0% V2:-0%~+0%	P
4	LOAD REGULATION	V1:-0.5%~+0.5% (Max) V2:-0.5%~+0.5% (Max)	I/P:48VDC O/P:MIN~FULL LOAD Ta:25°C	V1:-0%~+0% V2:-0%~+0%	P

INPUT FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	DC VOLTAGE RANGE	36VDC~72VDC (Typ)	I/P:TESTING O/P:FULL LOAD Ta:25°C	20.9V~72V	P
2	EFFICIENCY	82% (Typ)	I/P:48VDC O/P:FULL LOAD Ta:25°C	83.2%	P
3	DC CURRENT	83mA (Max)	I/P:48VDC O/P:FULL LOAD Ta:25°C	75mA	P

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	OVER LOAD PROTECTION	YES	I/P:48VDC O/P:TESTING Ta:25°C	172% Hiccup Mode Reset Auto Recovery	P
2	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P:48VDC O/P:FULL LOAD Ta:25°C	NO DAMAGE Hiccup Mode Reset Auto Recovery	P

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	TEMPERATURE RISE TEST	1. ROOM AMBIENT BURN-IN : 5HRS I/P:48VDC O/P:FULL LOAD Ta=25°C			P

SAFETY TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	I/P-O/P:1KVDC/min	I/P-O/P:1KVDC/min Ta:25℃	I/P-O/P:0.02mA NO DAMAGE	P
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ	I/P-O/P:500VDC Ta:25℃	I/P-O/P:13.4GΩ NO DAMAGE	P

DATE	SAMPLE	TEST RESULT	TESTER	APPROVAL
2003.8.28	DCW03C-15	PASS	FRANK.CHEN	MAX LIN