




(2.54 mm) .100"

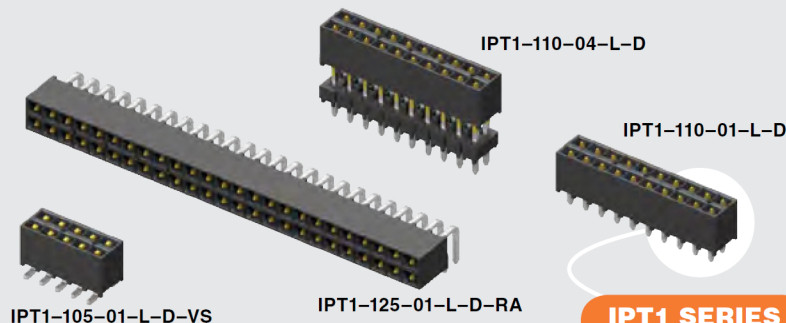

IPT1 SERIES

SHROUDED POWER CONNECTOR SET

SPECIFICATIONS

Mates with:
IPS1

Insulator Material:

Black LCP

Contact Material:

Phosphor Bronze

Plating:

Sn or Au over 50 μ m (1.27 μ m) Ni

Operating Temp Range:

-55 °C to +105 °C with Tin;

-55 °C to +125 °C with Gold

Insertion Depth:

(3.81 mm) .150" to

(6.48 mm) .255"

Wiping Distance:

(0.38 mm) .015"

Voltage Rating:

775 VAC/1095 VDC

Standard Creepage:

(2.48 mm) .098" (without -LC)

(1.28 mm) .050" (with -LC)


Standard Clearance:

(1.91 mm) .075" (without -LC)

(0.91 mm) .036" (with -LC)

RoHS Compliant: Yes

IPT1/IPS1	
PINS	CURRENT RATING (PER CONTACT)
1	5.9 A
2	4.8 A
3	4.1 A
4	3.6 A
ALL	2.3 A

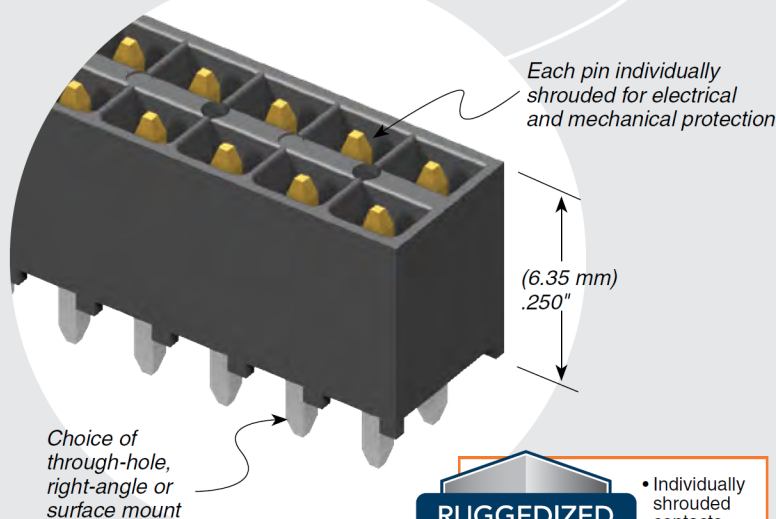

RUGGEDIZED
BY SAMTEC

- Individually shrouded contacts
- Locking clip option

PROCESSING

Lead-Free Solderable: Yes

SMT Lead Coplanarity:


(0.13 mm) .005" max (05-10)

(0.15 mm) .006" max (15-25)

RECOGNITIONS



APPLICATION



ALSO AVAILABLE (MOQ Required)

- Other sizes
- Other platings
- Latching feature
- No. 1 position polarized
- Increased creepage and clearance with the removal of contacts

Contact Samtec.

Note:

Some sizes, styles and options are non-standard, non-returnable.

IPT1 - **1** NO. PINS PER ROW - **LEAD STYLE** - **PLATING OPTION** - **D** - **TAIL OPTION** - **OTHER OPTION**

05, 10, 15, 20, 25
(Standard sizes)

Specify **LEAD STYLE** from chart

-L
= 10 μ m (0.25 μ m)
Gold on contact, Matte Tin on tail

-A
= Alignment Pin (-VS only) (N/A with -LC)

-LC
= Locking Clip (Manual placement required) (-VS only) (N/A with -A)

-K
= (6.00 mm) .236" DIA Polyimide film Pick & Place Pad (-VS only)

-TR
= Tape & Reel Packaging (-VS only)

-RA
= Right-angle

-VS
= Surface Mount

Requires -01 Lead Style (Leave blank for Through-hole)

LEAD STYLE	MATED HEIGHT	A	B
-01	(11.05) 435	(6.35) 250	(2.16) 85
-01-VS	(13.59) 535	(6.35) 250	N/A
-02	(14.00) 551	(9.30) 366	(2.64) 104
-03	(16.00) 630	(11.30) 445	(2.16) 85
-04	(17.00) 669	(14.30) 484	(2.69) 106
-05	(19.00) 748	(15.30) 563	(2.46) 97
-06	(20.00) 787	(15.30) 602	(2.35) 93
-07	(25.00) 984	(20.30) 799	(2.31) 91
-08	(30.00) 1181	(25.30) 996	(2.39) 94
-09	(35.00) 1378	(30.30) 1193	(2.46) 97

Through-hole **Surface Mount**

No. of positions x (2.54) .100 + (0.51) .020

(2.54) .100 (2.54) .100 (5.08) .200

(7.16) .282 (1.27) .050 (1.50) .060 (2.30) .090 (2.54) .100

-VS **-RA**

(0.51) .020 (0.64) .025 SQ