


PROTECTIVE CAP

OPTICAL FERRULE

SPRING

BAYONET BOOT

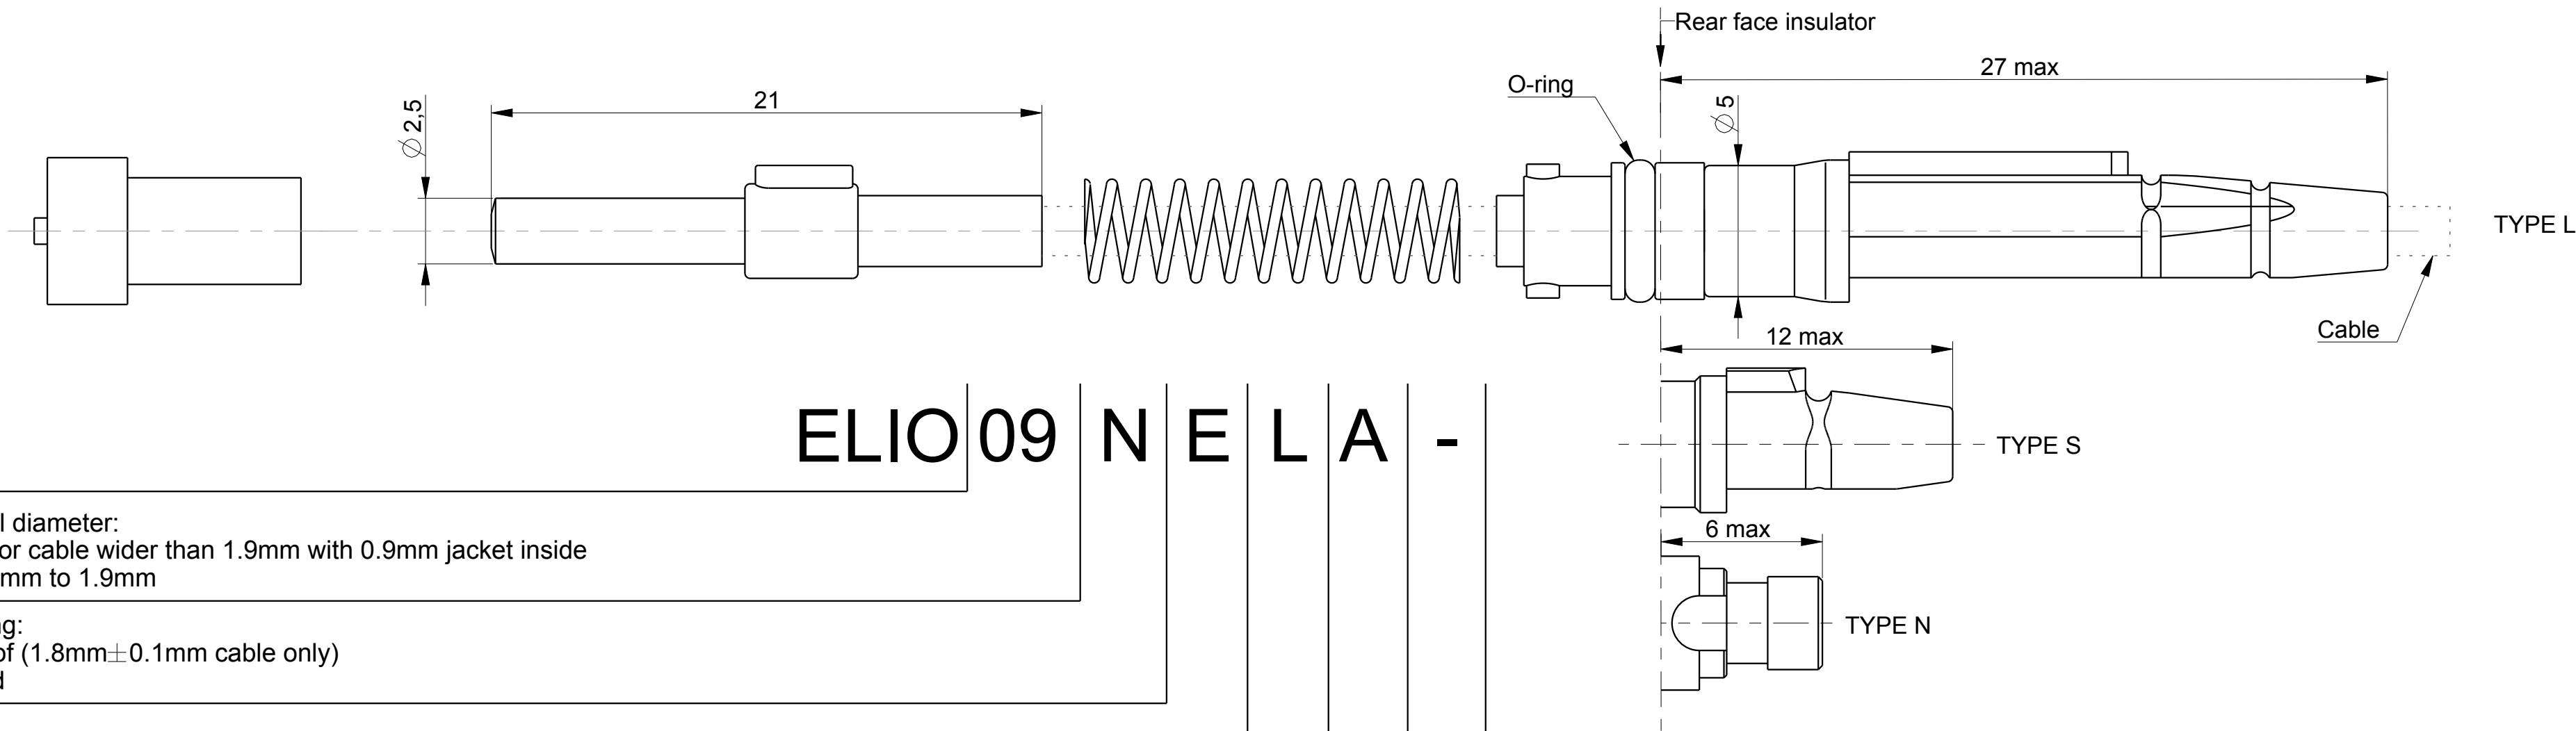

Cable external diameter:
-09: 0.9 mm or cable wider than 1.9mm with 0.9mm jacket inside
-18: from 1.5mm to 1.9mm

Contact sealing:
W: waterproof (1.8mm±0.1mm cable only)
N: not sealed

Fibre type:
E: 9/125µm Singlemode

Boot type:
L: Long boot
S: Short boot
N: No boot (not sealed version only)

Contact version index

Packaging:
:x1
C :x100 (each item packed by 100 in separate plastic bag)


ELIO 09 NEL A -

TYPE L and TYPE S : white or cream boot

Order separated

P/N	Optical ferrule		Spring	Bayonet boot				Reducer	Insertion & Extraction Tooling
	Ferrule	Body		Type	Boot	Bayonet	O-ring		
ELIO09NELA	Ceramic	Composite	Stainless steel	L	Elastomer	Composite	N/A	YES *	80WV-0059A
ELIO09NESA	Ceramic	Composite	Stainless steel	S	Elastomer	Composite	N/A	YES *	80WV-0059A
ELIO09NENA	Ceramic	Composite	Stainless steel	N	N/A	Composite	N/A	YES *	80WV-0060A
ELIO18WELA	Ceramic	Composite	Stainless steel	L	Elastomer	Composite	Elastomer	NO	80WV-0059A
ELIO18WESA	Ceramic	Composite	Stainless steel	S	Elastomer	Composite	Elastomer	NO	80WV-0059A
ELIO18NELA	Ceramic	Composite	Stainless steel	L	Elastomer	Composite	N/A	NO	80WV-0059A
ELIO18NESA	Ceramic	Composite	Stainless steel	S	Elastomer	Composite	N/A	NO	80WV-0059A
ELIO18NENA	Ceramic	Composite	Stainless steel	N	N/A	Composite	N/A	NO	80WV-0060A

* Reducer view



See EN 4531-201 for dimensions

Country	Jurisdiction & Control List
FR	NOT LISTED

P/N : SEE TABLE

G	25/07/16	Updating tool references		—
ISS	DATE	Latest modification - by: F.LECOMTE		MOD N°
Designed by:		FOUQUERAY	Date:- 20/08/10	CUSTOMER DRAWING
TITLE		ELIO OPTICAL CONTACT FOR FIBER OF TYPE E (9/125µm Singlemode)		
Scale		General linear Tolerances: ± 0.2	NPRDS / PROJECT AC101201	
SOURIAU		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT	SOURIAU DRG N° ELIO-CONTACT-E-C01			SHEET 1 / 2

G.5: Valide

8
7
6
5
4
3
2
1

H G F E D C B A


MASS ± 5%

-- g

8
7
6
5
4
3
2
1

Country	Jurisdiction & Control List
FR	NOT LISTED

P/N : SEE TABLE

G		Updating tool references	--
ISS	DATE	Latest modification - by:	MOD N°
Designed by:		Date:	CUSTOMER DRAWING
TITLE		ELIO OPTICAL CONTACT FOR FIBER OF TYPE E (9/125µm Singlemode)	
Scale 9/1		General linear Tolerances: ± --	NPRDS / PROJECT AC101201
SOURIAU		WWW.SOURIAU.COM	This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT A2	SOURIAU DRG N° ELIO-CONTACT-E-C01		SHEET 2 / 2

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products
which does not comply with the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)