


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.


THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

BS,A , 200173,002,02

REV.	DATE	DESCRIPTION	BY	C'K'D'
01	12-02-96	CONVERSION ME10	NIETVELT	
02	12.06.98	Material note corrected	S.V.D.	

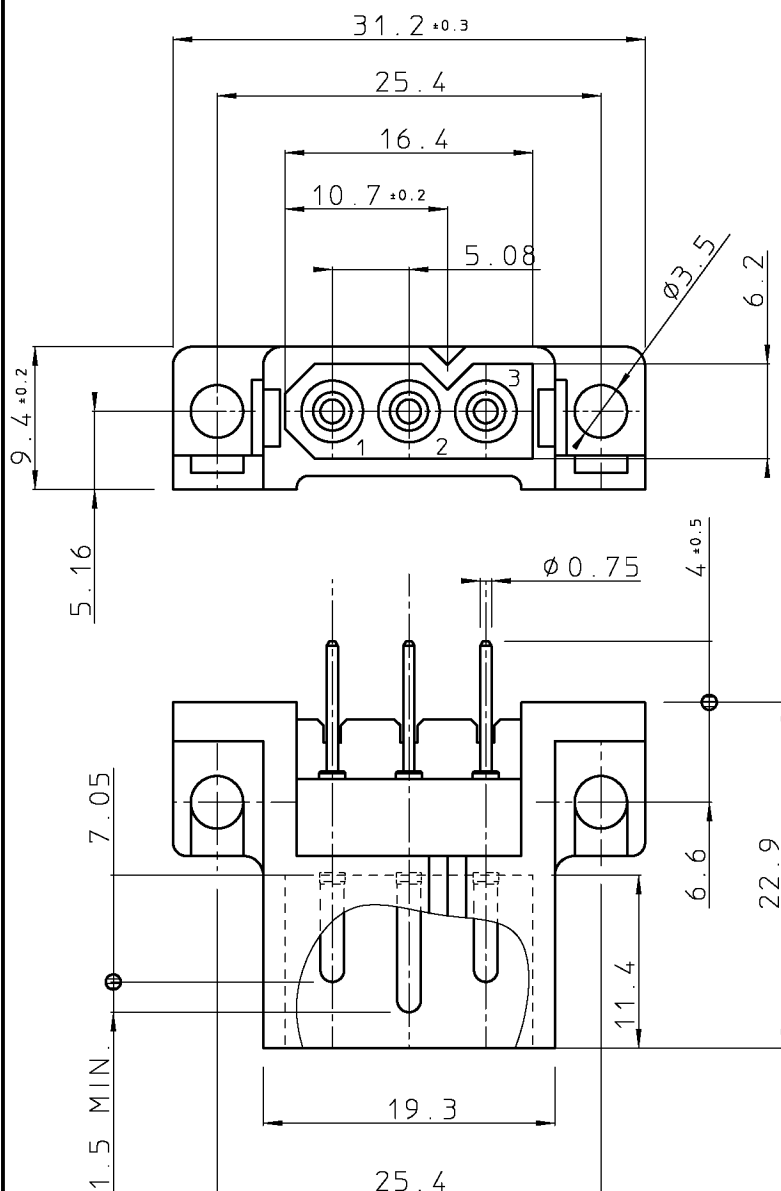

DRILLING HOLE PATTERN

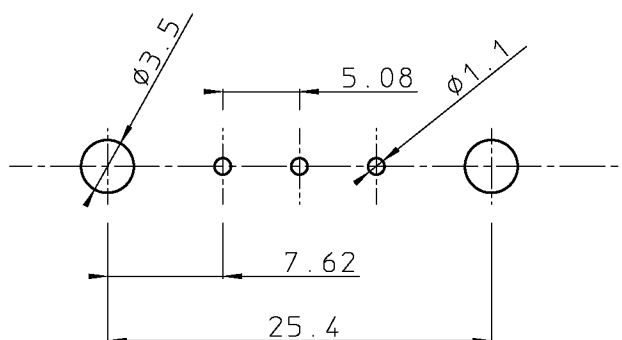

MATERIAL :

BODY : POLYAMIDE 6.6 ; COLOUR : BLACK
CONTACTS : BRASS

PERFORMANCE CHARACTERISTICS :

OPERATING TEMPERATURE : -55°C TO +105°C
INSULATING RESISTANCE : 5000MΩ MIN.
TEST POTENTIAL : 2000 VAC
CURRENT RATING : 5 AMPS.

NOTES :

CONNECTOR SUPPLIED FULLY LOADED
WITH MACHINED MALE CONTACTS.
MATING PART : SMS3P3
*PLATING INDICATION : SEE SHEET 001

GEN. ST.	01		02		03		04		05		06		07		08		0D		50		60		70		80		90				
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN	APPR.	DATE	SIGN.	QIKMATE STRAIGHT PINHEADER 03MALE DIP SOLDER CTS.	
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	DRAFT	05.06.85	E. CREELLE	CAT. No. SMS3PHGE42*	
	CHECKED			 SOURIAU Connection Technology SOURIAU Route Nationale 23 72470 CHAMPAGNE	
	PROD. MGR.				
ALL DIMENSIONS IN MM  ALLE AFMETINGEN IN MM	PR.ENG.MGR.			SCALE 2/1	
	PR.MGT.MGR.				
	REFERENCES / REFERENTIES			BS,A , 200173,002,02 DRAWING NR. CUSTOMER DRAWING	