

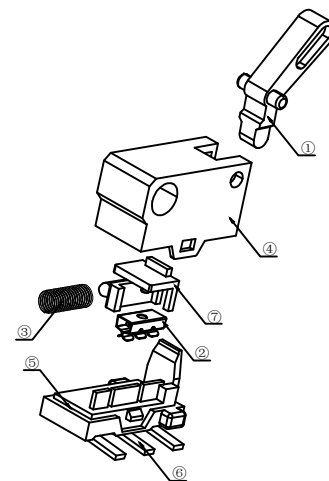
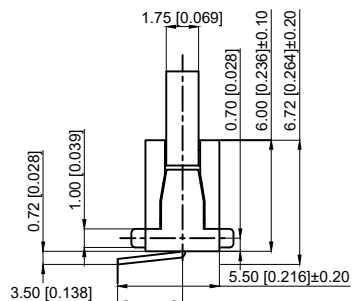
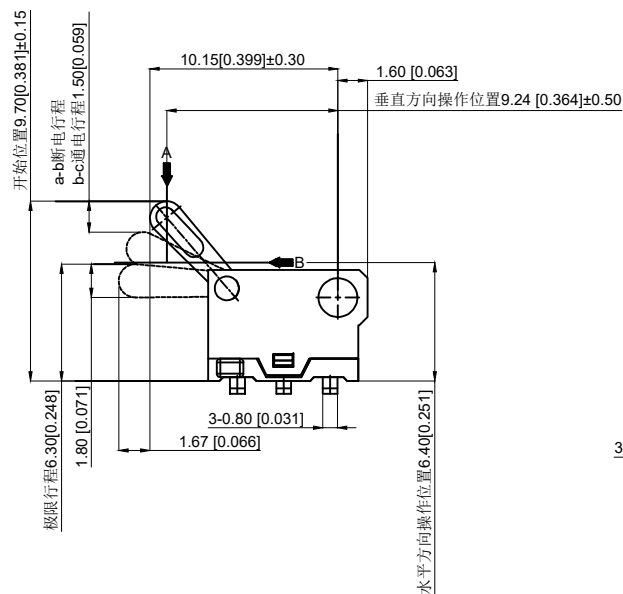






NOTES:

1. Rating: 16VDC 50mA
1. 额定值: 16VDC 50mA
2. Dielectric Strength: 250V AC
2. 耐电压: 250V AC
3. Contact Resistance: ≤200mΩ Max
3. 接触电阻: ≤200mΩ
4. Insulation Resistance: ≥50MΩ
4. 绝缘电阻: ≥50MΩ
5. Operating Force: 40±10gf
5. 操作力: 40±10gf
6. Life: 20,000 times
6. 寿命: 20,000 times
7. Travel: 6.30±0.1mm
7. 行程: 6.30±0.1mm
8. operation temperature: -20℃~70℃
8. 工作温度: -20℃~70℃

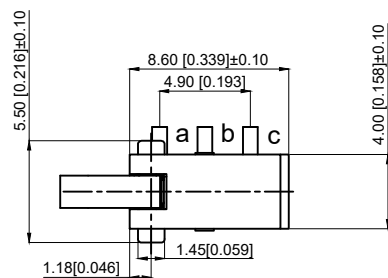

7	Inner slide 内滑片	POM	1	Black 黑色
6	Solder foot 焊锡脚	Brass	3	Ag plating 镀银
5	Pedestal 基座	PPA	1	Black 黑色
4	Cover 盖子	Nylon	1	Black 黑色
3	Spring 弹簧	SUS	1	
2	Reed 簧片	Silver coated copper 覆银铜	1	Ag plating 镀银
1	Press handle 按柄	POM	1	Black 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP72422
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
ROCPCU TECHNOLOGY CO.,LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				