



Atmel | SMART SAM3A Series MCUs

ARM Cortex-M3 Flash device with dual CAN
and HS USB Host and Device with PHY




Benefits

- ARM® Cortex®-M3 technology
- Highly integrated peripheral set for connectivity and communication
- Safety and security features
- Native Atmel® QTouch® capacitive touch support
- Simplified PCB design and low system cost
- Sophisticated and flexible power management under all conditions of use

Key Features

- 1.62V to 3.6V supply
- ARM Cortex-M3 rev 2.0 processor running at up to 84MHz
- Memory protection unit (MPU)
- Native 6-layer AHB bus matrix, 21 DMA channels
- Up to 2 x 256KB dual-bank Flash and up to 100KB dual-bank SRAM
- Power consumption 500µA/MHz, RAM retention mode 8µA, backup mode down to 1.6µA
- Up to 63 I/O lines with integrated serial resistors (on-die termination)
- 100- and 144-pin packages
- Connectivity
 - Dual CAN with eight mailboxes
 - USB 2.0 High Speed Device/Mini Host with PHY
 - HS SD/SDIO/MMC, USART, SPI, I2S, I2C
- Safety and security
 - ECC on Flash
 - Independent watchdog
 - Dual-bank Flash
 - Clock failure detection
 - True Random Number Generator (TRNG)
 - On-the-fly external memory scrambling
- Analog
 - Up to 16-channel 12-bit 1Msps ADC with PGA stage and differential inputs
 - 2-channel 12-bit 1Msps DAC
 - Temperature sensor

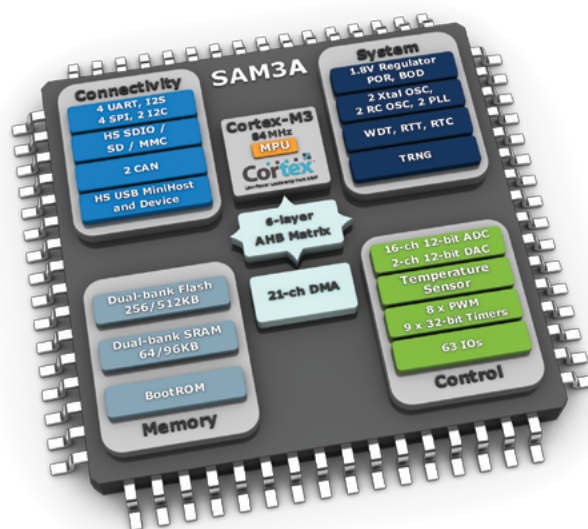

- Timers and Pulse Width Modulator (PWM)
 - Powerful and flexible 32-bit timers with quadrature decoder and gray counter
 - 16-bit PWM with complementary output, fault input, 12-bit dead-time generator counter
 - Calendar RTC, watchdog timer
- System
 - Embedded regulator, power-on reset, brown-out detection
 - Multiple clock sources, including 32kHz oscillator and factory-trimmed RC

Application Areas

- Building and home control/automation
- Industrial automation
- Machine-to-machine (M2M)
- Test and measurement
- Medical
- Smart grid




Atmel | SMART SAM3A Series MCUs

ARM Cortex-M3 Flash device with dual CAN
and HS USB Host and Device with PHY

Evaluation Kit and Ecosystem

- Full-featured evaluation board and free-of-charge software package with full source code, usage examples, documentation, and ready-to-use projects for industry-standard compilers
- Supported by Atmel Studio integrated development environment (IDE)
- Atmel BitCloud® (ZigBee PRO) stack available
- Atmel QTouch® library support for robust capacitive touch sensing interfaces for button, sliders and wheels
- Worldwide support ecosystem of industry-leading suppliers of development tools, real-time operating systems and middleware products
- **Kit Ordering Code ATSAM3X-EK**

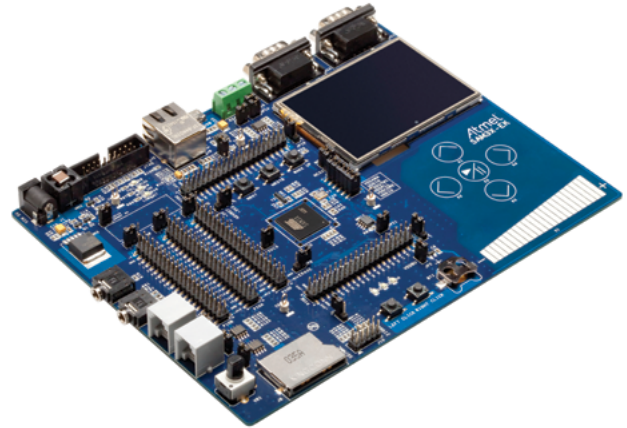

Ordering Code	Flash	Package
ATSAM3A8CA-CU	512KB*	LFBGA100
ATSAM3A8CA-AU	512KB*	LQFP100
ATSAM3A4CA-CU	256KB**	LFBGA100
ATSAM3A4CA-AU	256KB**	LQFP100

* 2x256KB dual-bank Flash

** 2x128KB dual-bank Flash



Atmel Corporation 1600 Technology Drive, San Jose, CA 95110 USA **T :** (+1) (408) 441.0311 **F :** (+1) (408) 436.4200 | **www.atmel.com**

© 2015 Atmel Corporation. / Rev.: Atmel-11151C-SAM3A-Flyer_E_US_122015

Atmel® Atmel logo and combinations thereof, Enabling Unlimited Possibilities® and others are registered trademarks or trademarks of Atmel Corporation in U.S. and other countries. ARM®, ARM Connected® logo and others are the registered trademarks or trademarks of ARM Ltd. Other terms and product names may be trademarks of others.

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN THE ATMEL TERMS AND CONDITIONS OF SALES LOCATED ON THE ATMEL WEBSITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS AND PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and products descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.