

Microchip**Filter specification****TFS70CG****1/5****Measurement condition**

Ambient temperature T_A :	23	°C
Input power level:	0	dBm
Terminating impedance: *)		
Input:	725 Ω -20.5 pF	
Output:	811 Ω -19.0 pF	

Characteristics

Remark:

The reference level for the relative attenuation a_{rel} of the TFS70CG is the minimum of the pass band attenuation. This value is defined as the insertion loss a_e . The nominal frequency f_N is fixed at 70 MHz without any tolerance. The values of relative attenuation a_{rel} are guaranteed over the whole operating temperature range. The frequency shift of the filter within the operating temperature range is included in the production tolerance scheme.

D a t a	typ. value		tolerance / limit		
Insertion loss	a_e	6.5 dB	max.	8	dB
Nominal frequency	f_N			70	MHz
Passband	PB		$f_N \pm$	0.05	MHz
Amplitude ripple in any 25 kHz segment within PB		0.29 dB	max.	1	dB
Relative attenuation	a_{rel}				
f_N ... $f_N \pm$ 0.05 MHz		0.35 dB	max.	1	dB
f_N - 69.5 MHz ... f_N - 0.4 MHz		45 dB	min.	40	dB
f_N - 0.4 MHz ... f_N - 0.3 MHz		39 dB	min.	30	dB
f_N + 0.3 MHz ... f_N + 0.4 MHz		28 dB	min.	26	dB
f_N + 0.4 MHz ... f_N + 0.5 MHz		40 dB	min.	34	dB
f_N + 0.5 MHz ... f_N + 930.0 MHz		42 dB	min.	40	dB
Return loss within PB		18 dB	min.	10	dB
IIP3	**)	-	min.	30	dBm
Input power level			max.	15	dBm
Operating temperature range	OTR			-40 °C ... +85 °C	
Storage temperature range				-55 °C ... +125 °C	
Frequency inversion temperature	T_0	15 °C			
Temperature coefficient of frequency	TC_f ***)	-0.036 ppm/K ²			

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

**) $f_{in1} = 69.9750$ MHz; $f_{in2} = 69.9875$ MHz; $P_{in} = 0$ dBm; $f_{measurement1} = 70.0000$ MHz



***) $\Delta f = TC_f(T - T_0)^2 f_N$

Generated:**Checked / Approved:**

Microchip Frequency Technology GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30


Microchip Frequency Technology GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Filter characteristic

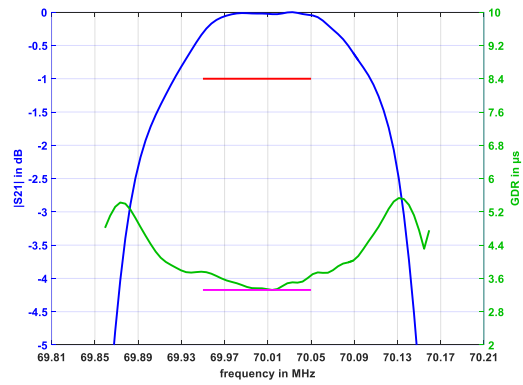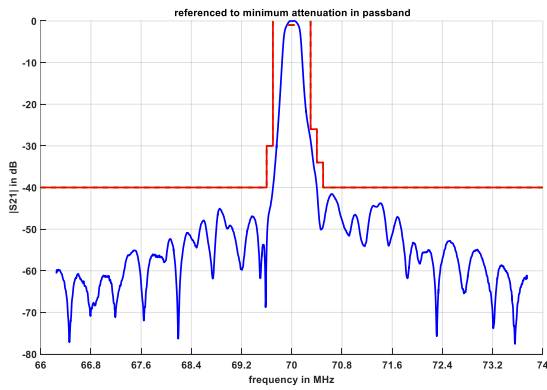


Construction and pin connection

(All dimensions in mm)

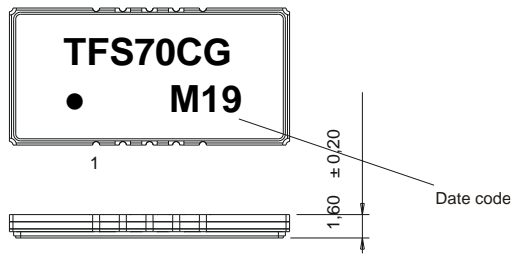


- 1 Ground
- 2 Ground
- 3 Ground
- 4 Ground
- 5 Output
- 6 Ground
- 7 Ground
- 8 Ground
- 9 Ground
- 10 Input

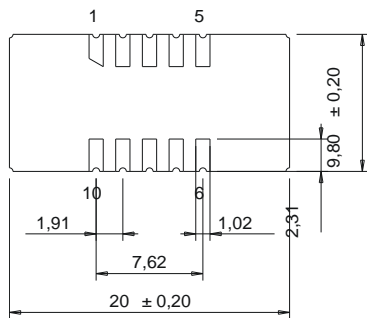

Date code: Year + week
 M 2020
 N 2021
 P 2022
 ...

50 Ω Test circuit

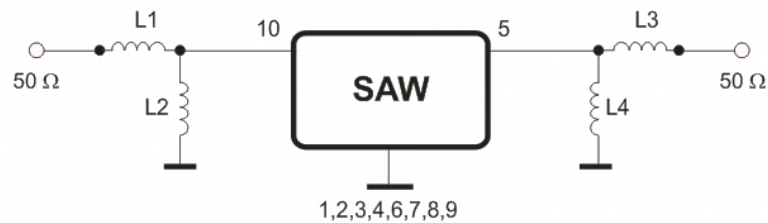

Microchip Frequency Technology GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

Microchip Frequency Technology GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability characteristics, reliability

After the following tests the filter shall meet the whole specification:

1. Shock: 500 g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 60068 T2 - 27
2. Vibration: 10 Hz to 2000 Hz, 0.35 mm or 5 g respectively, 1 octave per min, 10 cycles per plane, 3 planes; DIN IEC 60068 T2 - 6
3. Change of temperature: -55 °C to 125 °C / 15 min. each / 100 cycles
DIN IEC 60068 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: three times max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;
5. SAW devices are Electrostatic Discharge (ESD) sensitive devices.

This filter is RoHS compliant (2011/65/EU+2015/863/EU)


Packing

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

reel of empty components at start:	min. 300 mm
reel of empty components at start including leader:	min. 500 mm
trailer:	min. 300 mm


Tape (all dimensions in mm)

- W : 32.00
- Po : 4.00 ±0.1
- Do : 1.50 +0.1/-0
- E : 1.75 ±0.1
- F : 14.20 ±0.1
- G(min) :
- P2 : 2.00 ±0.1
- P1 : 16.00 ±0.1
- D1(min) : 2.00
- Ao : 10.25 ±0.1
- Bo : 20.45
- Ct : 25.50
- Ko : 2.05 ±0.1
- t : 0.30 ±0.05

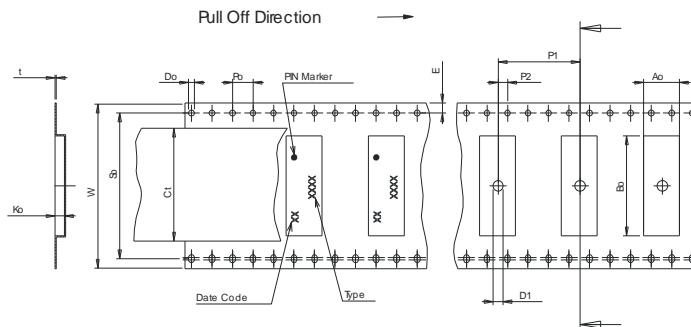

Reel (all dimensions in mm)

- A : 330 or 180
- W1 : 32.4
- W2(max) : 38.40
- N(min) : 100.00
- C : 13.0

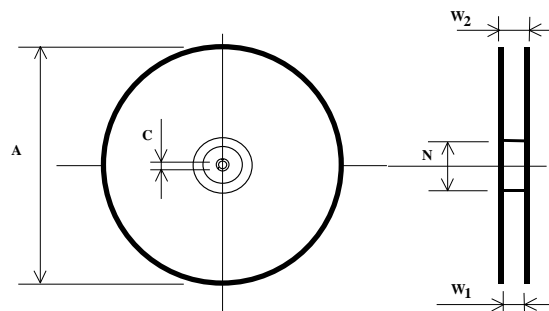

The minimum bending radius is 45 mm.


Microchip Frequency Technology GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

Microchip Frequency Technology GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

Conditions	Exposure
Average ramp-up rate (30 °C to 217 °C)	less than 3 °C / second
> 100 °C	between 300 and 600 seconds
> 150 °C	between 240 and 500 seconds
> 217 °C	between 30 and 150 seconds
Peak temperature	max. 260 °C
Time within 5 °C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50 °C)	less than 6 °C / second
Time from 30 °C to Peak temperature	no greater than 300 seconds

Chip-mount air reflow profile

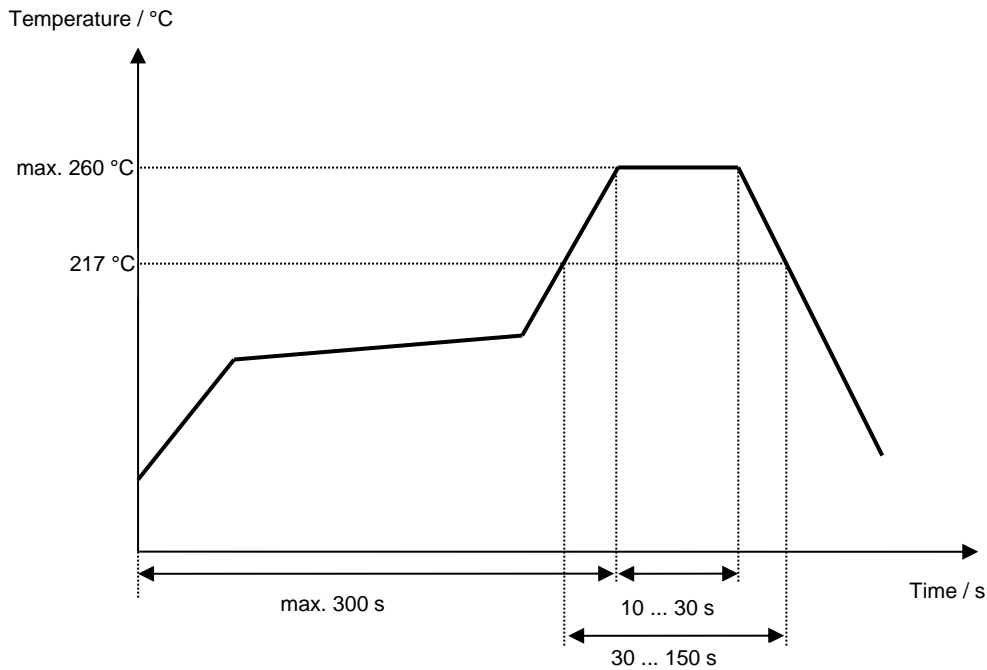

Microchip**Filter specification****TFS70CG****5/5****History**

Version	Reason of Changes	Name	Date
1.0	- Generation of development specification	P. Jaster	03.03.2020
2.0	- Updated amplitude ripple + IIP3 measurement conditions	P. Jaster	05.05.2020
3.0	- Add typ. values & plots, move to filter spec with the following changes: <ul style="list-style-type: none">- amend matching topology.- amend passband variation $fN \pm 0.05\text{MHz}$, 2dB max → 1dB max- amend rejection $fN + 0.3\text{MHz} \dots fN + 0.4\text{MHz}$, 30dB min → 26dB min- amend rejection $fN + 0.4\text{MHz} \dots fN + 0.5\text{MHz}$, 40dB min → 34dB min	Jaffer	24.10.2020

Microchip Frequency Technology GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

Microchip Frequency Technology GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.